


# Schottky Powermod

## FST6080 – FST60100

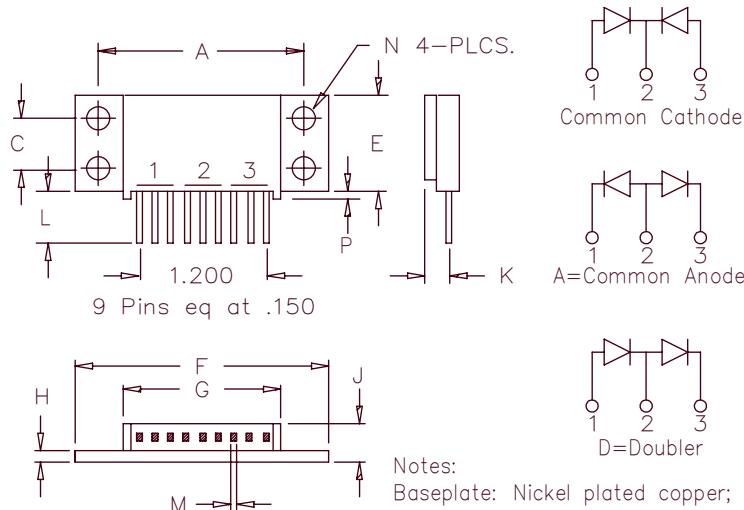

Notes:  
Baseplate: Nickel plated copper;  
electrically isolated  
Pins: Nickel plated copper

Dim.	Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	1.995	2.005	50.67	50.93	
C	0.495	0.506	12.57	12.83	
E	0.990	1.010	25.15	25.65	
F	2.390	2.410	60.71	61.21	
G	1.490	1.510	37.85	38.35	
H	0.120	0.130	3.05	3.30	
J	—	0.400	—	10.16	
K	0.240	0.260	6.10	6.60 to Lead $\frac{1}{4}$	
L	0.490	0.510	12.45	12.95	
M	0.040	.050	1.02	1.27	Square
N	0.175	0.195	4.45	4.95	Dia
P	0.032	0.052	0.81	1.32	

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage
FST6080*	80V	80V
FST6090*	90V	90V
FST60100*	100V	100V

\*Add the Suffix A for Common Anode, D for Doubler

- Schottky barrier rectifier
- Guard ring for reverse protection
- VRRM – 80 to 100 Volts
- High surge capacity
- Reverse energy tested
- Electrically isolated baseplate
- ROHS Compliant

### Electrical Characteristics

Average forward current per pkg	I <sub>F(AV)</sub> 120 Amps
Average forward current per leg	I <sub>F(AV)</sub> 60 Amps
Maximum surge current per leg	I <sub>FSM</sub> 1200 Amps
Max repetitive peak reverse current per leg	I <sub>R(OV)</sub> 2 Amps
Max peak forward voltage per leg	V <sub>FM</sub> .68 Volts
Max peak forward voltage per leg	V <sub>FM</sub> .86 Volts
Max peak reverse current per leg	I <sub>RM</sub> 30 mA
Max peak reverse current per leg	I <sub>RM</sub> 2 mA
Typical junction capacitance per leg	C <sub>J</sub> 1500 pF

T<sub>C</sub> = 130°C, Square wave, R<sub>θJC</sub> = 0.6°C/W  
T<sub>C</sub> = 130°C, Square wave, R<sub>θJC</sub> = 1.0°C/W  
8.3 ms, half sine T<sub>J</sub> = 175°C  
f = 1 KHz, 25°C, 1μsec Square wave  
I<sub>FM</sub> = 60A: T<sub>J</sub> = 175°C\*  
I<sub>FM</sub> = 60A: T<sub>J</sub> = 25°C\*  
V<sub>RRM</sub>, T<sub>J</sub> = 125°C\*  
V<sub>RRM</sub>, T<sub>J</sub> = 25°C  
V<sub>R</sub> = 5.0V, T<sub>J</sub> = 25°C

\*Pulse test: Pulse width 300μsec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	T <sub>TG</sub>	-55°C to 175°C
Operating junction temp range	T <sub>J</sub>	-55°C to 175°C
Maximum thermal resistance per leg	R <sub>θJC</sub>	1.0°C/W Junction to case
Maximum thermal resistance per pkg	R <sub>θJC</sub>	0.6°C/W Junction to case
Typical thermal resistance (greased)	R <sub>θCS</sub>	0.1°C/W Case to sink
Mounting torque		15 – 20 inch pounds maximum
Weight		2.5 ounces (71 grams) typical

# FST6080 – FST60100

Figure 1  
Typical Forward Characteristics – Per Leg

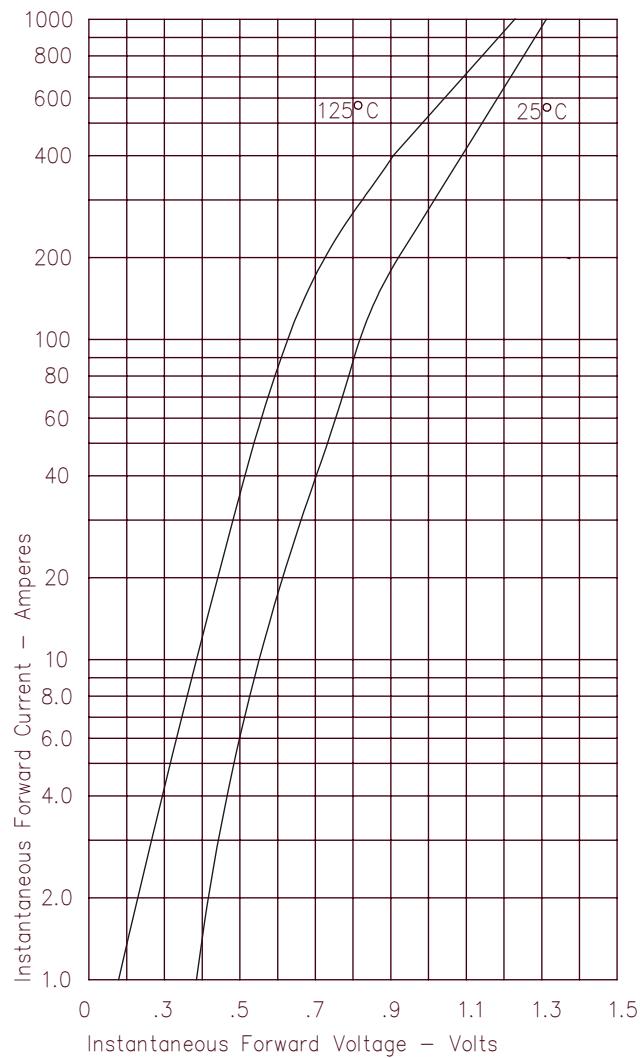


Figure 2  
Typical Reverse Characteristics – Per Leg

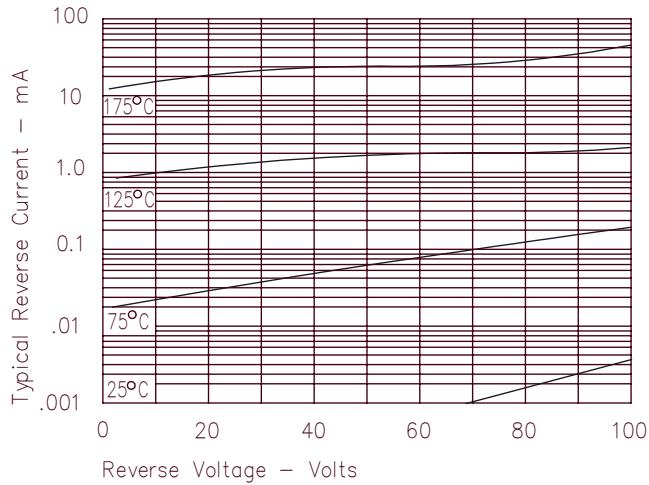


Figure 3  
Typical Junction Capacitance – Per Leg

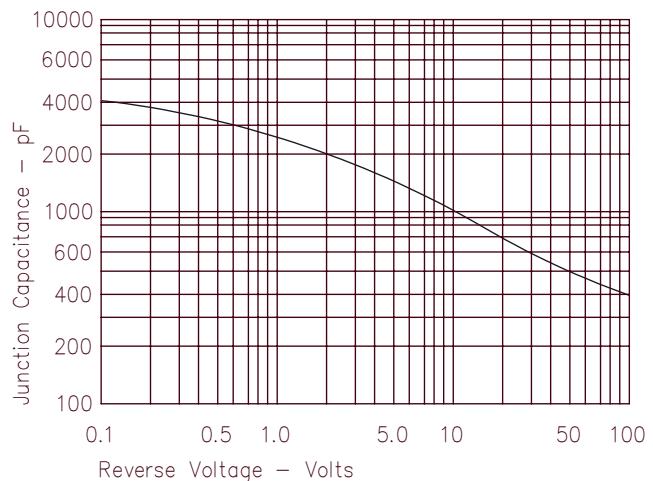


Figure 4  
Forward Current Derating – Per Leg

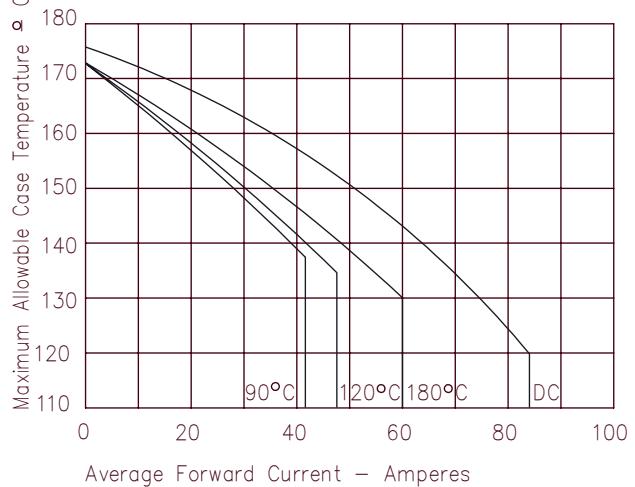


Figure 5  
Maximum Forward Power Dissipation – Per Leg

