




TOP VIEW



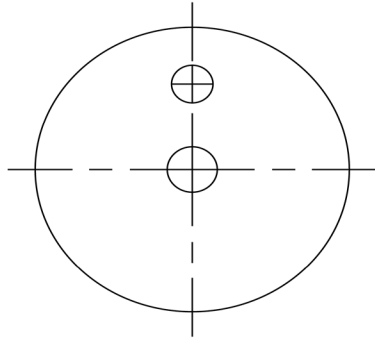

SIDE VIEW

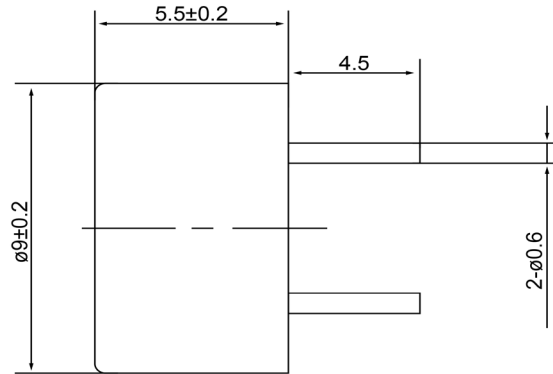

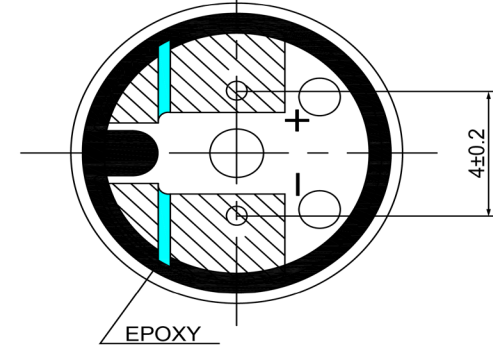BOTTOM VIEW



Specifications			Notes	Revision History							
Description	Value	Unit		Version	Description	Date	Approved				
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering	10/21/2013	J.S				
Resonant Frequency	2,731	(Hz)									
Rated Voltage	1.5	(V)									
SPL @ 10cm	80	(dBA)									
Coil Resistance	5.5	(ohm)									
Mount Type	Thru-hole										
Voltage Range	1 ~ 3	(V)									
Max Rated Current	80	(mA)									
Housing Material	PBT										
Operating Temperature	-30 ~ +70	°C									
Storage Temperature	-40 ~ +85	°C									
Weight	1	(g)									
						Drawn by	Date	Checked by	Date	Approved by	Date
						A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
			Electro-Mechanical Transducer			<b>TE092701-3</b>					