
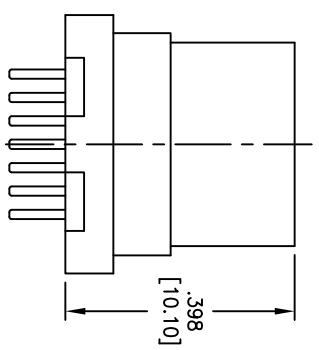
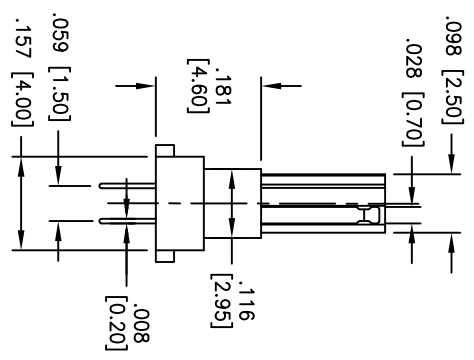

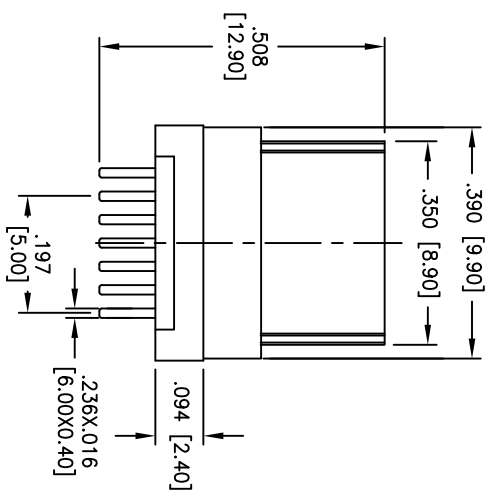


APPROVED: _____ TITLE: _____
 DATE: _____



Rev	AWO #	Description	Date	Appr
-		RELEASED	11/30/09	
A		ADDED PIN NUMBER	5/24/10	
B		REVISED SHAPE	10/20/10	
C		REVISED DIM.	10/27/10	
D		REVISED DIM.	3/11/11	

SPECIFICATIONS:

- Material: Insulator: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Shell: Stainless Steel, Tin over Nickel plated
- Plating: Gold Flash over Nickel underplate overall
- Electrical: Current rating: 1 Amp max.
- Contact resistance: 30 mohms max.
- Insulation resistance: 1000 Mohms min. @ 500 VDC
- Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +105°C
- Environmental: Lead free, RoHS compliant.
- Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINI USB, 14P, MALE PLUG,
 OVERMOLDINH TYPE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM TOLERANCES: EXCEPT AS NOTED INCHES		HOLES	
X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	SS	11/30/09	
CHECKED			
APPROVED			

SIZE	PART NO.	REV.
X	MUSB-14P-PLUG	D
REF: S0074T	SCALE: NTS	SHEET 1 OF 1