

E-Series Surface Mount Power Divider 1-2200 MHz

Rev. V1


Features

- · 2 Way 500hm
- · Surface Mount
- · 0 Degree
- · Broad Band performance

Description

MAPD-010201-8022CG is a RoHS compliant 2 Way 0°Power Divider in a low cost, surface mount package.

Schematic




Product Image





Pin Configuration


Pin No.	Function
1	Input
2	Not Used (GND)
3	Output Port1
4	Output Port2
5	Not Used (GND)
6	Ground

Component Dimensions









* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

• India Tel: +91.80.43537383

• China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.



E-Series Surface Mount Power Divider 1-2200 MHz

Rev. V1

Electrical Specifications: $T_A = 25^{\circ}C$, $Z_0 = 50^{\circ}\Omega$

Parameter	Frequency (MHz)	Units	Min	Тур	Max
Insertion Loss (Above 3dB)	1 - 2200	dB	_	0.6	1.2
Isolation	1 - 800 800 - 1000 1000 -1800 1800 -2200	dB dB dB dB	 13.5 15 17	12 15 17 18	13 17 19
Amplitude Balance	1 - 800 800 - 1000 1000 -1800 1800 -2200	dB dB dB dB	_ _ _ _	0.2 0.5 0.7 1.2	0.5 0.7 1.2 1.5
Phase Balance	1 - 2200	deg	_	1	3
Input Return Loss	1 - 800 800 - 1000 1000 -1800 1800 -2000	dB dB dB dB	8 10 — 15	10 10.6 14 16	_ _ _ _
Output Return Loss	1 - 800 800 - 1000 1000 -1800 1800 -2000	dB dB dB dB	18 17 12 10	22 20 19 12	_ _ _

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
RF Power	250 mW
Internal Load Dissipation	50 mA
Operating Temperature	-40℃ to +80℃
Storage Temperature	-55℃ to +125℃

^{1.} Exceeding any one or combination of these limits may cause permanent damage to this device.

• India Tel: +91.80.43537383 Visit www.macomtech.com for additional data sheets and product information.

• China Tel: +86.21.2407.1588

^{2.} M/A-COM does not recommend sustained operation near these survivability limits.




E-Series Surface Mount Power Divider 1-2200 MHz


Rev. V1

Typical Performance Curves


Insertion Loss




Amplitude Unbalance




Phase Unbalance




Input Return Loss



Output Return Loss



Isolation



• India Tel: +91.80.43537383

• China Tel: +86.21.2407.1588




E-Series Surface Mount Power Divider 1-2200 MHz

Rev. V1

Tape & Reel Information

DIRECTION OF FEED

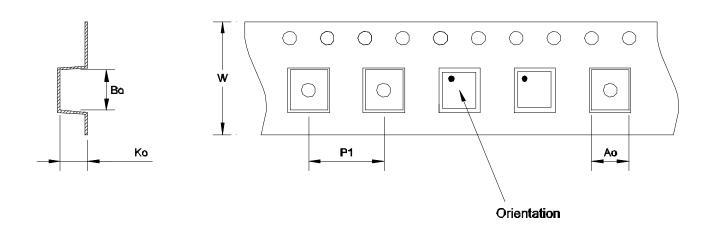

Item	Dimension
Ao	4.00mm +/-0.1mm
Во	4.00mm +/-0.1mm
Ko	2.9mm +/-0.1mm
W	12.00mm +/-0.3mm
P1	8.00mm +/-0.1mm

Ordering Information

Part Number	Package
MAPD-010201-8022CG	Tape and Reel (2000 piece Reel)

- India Tel: +91.80.43537383
- China Tel: +86.21.2407.1588