

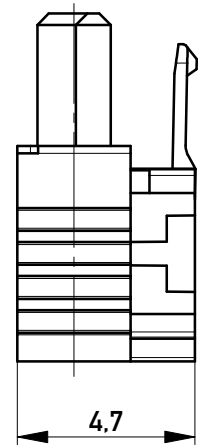


Kabelführung: weiß
cable guide: white

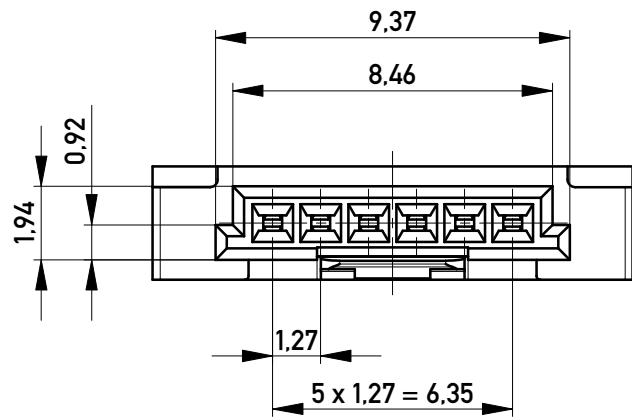


mit aufgesetzter
 Kabelführung
 (Anlieferungszustand)
*with cable guide mounted
 (state at time of supply)*

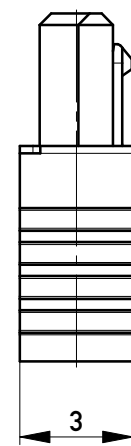


Kabelführung verpresst
 (cable guide pressed on)

Verpackt in Tray - *tray packaging*
 Verpackungseinheit 168 Stück - *packaging unit 168 pcs*

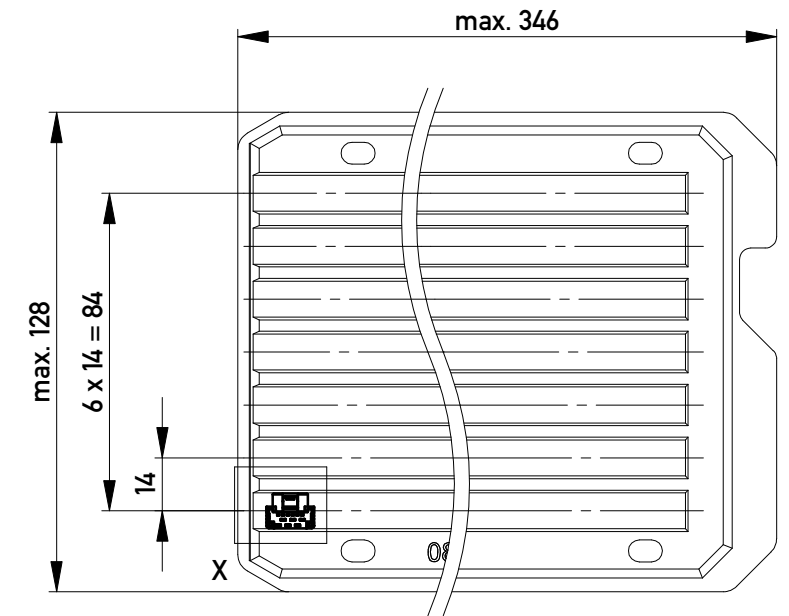

Einzelheit X - *detail X*
 M 2:1

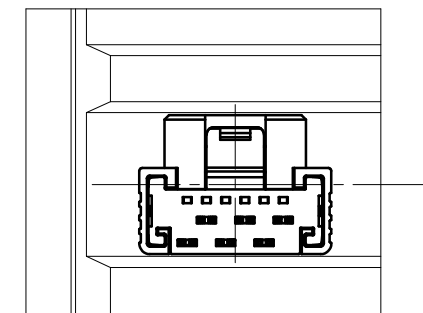

* Federkontakt AWG 24-26 - *Female Contact AWG 24-26*
 Kabelführung $\varnothing 1,07$ - *cable guide $\varnothing 1,07$*
 Kabelführung Farbe weiß - *componentcolor: white*

ohne Hilfsmittel lösbar
without tool unlockable

Information:		Tolerances	All Dimensions in mm	Scale 5:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation 1,27 SRC A SKV, 6-polig 1,27 SRC A IDC, 6-pin	
a		19.05.2014	www.ERNI.com	100203580001	K
Index	Date			Class	SRCA
					A3

Copyright by ERNI Production GmbH & Co. KG
 Proprietary notice pursuant to ISO 16016 to be observed.