



Rev	AWO #	Description	Date	Appr
-	9849	RELEASED	11/11/09	

APPROVED: _____
 DATE: _____ TITLE: _____

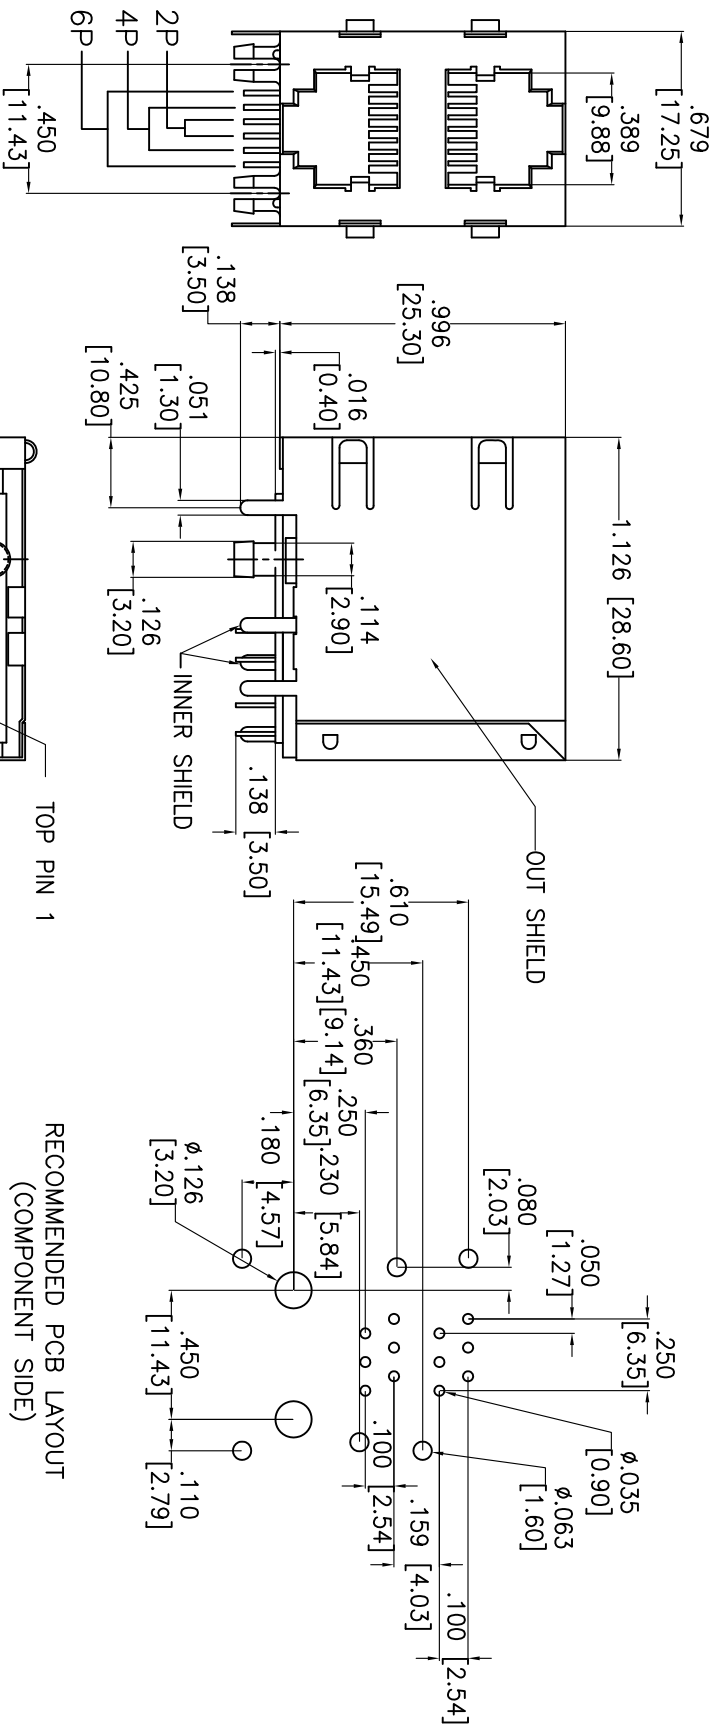

RECOMMENDED PCB LAYOUT
 (COMPONENT SIDE)

X	PLATING
0	15 µin Gold
1	30 µin Gold
2	50 µin Gold



TOP PIN 1
 BOTTOM PIN 1

SPECIFICATIONS:

- Material: PBT, glass reinforced rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Shield: Copper Alloy, Nickel plated
- Contact Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on tails (See chart for thickness).

- Electrical: Voltage plating: 125 VAC RMS. Current resistance: 1.5 Amp. Contact resistance: 50 Milliohms max. Insulation Resistance: 1000M ohm Min@ 500 VDC. Dielectric Withstanding Voltage: 1000 VAC for 1 minute. Temperature Rating: Operating temperature: -40°C to +85°C. Environmental: Lead free, ROHS compliant.



APPROVALS		DATE
DRAWN	DY	11/11/09
CHECKED		
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR JACK GANGED, 2 PORT, 6P6C

SIZE	PART NO.	REV.
X	MTJG-2-66JX1-FSG-PG	

REF: S0005C SCALE: NTS SHEET 1 OF 1