
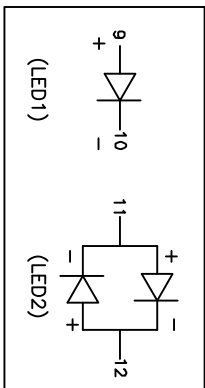
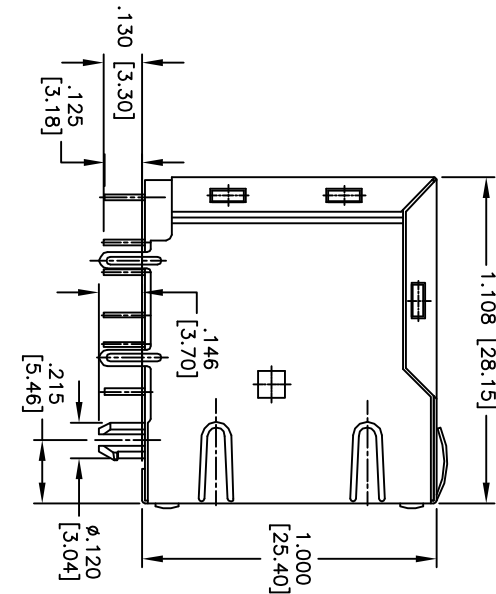


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/12/10	

APPROVED: _____

DATE: _____ TITLE: _____

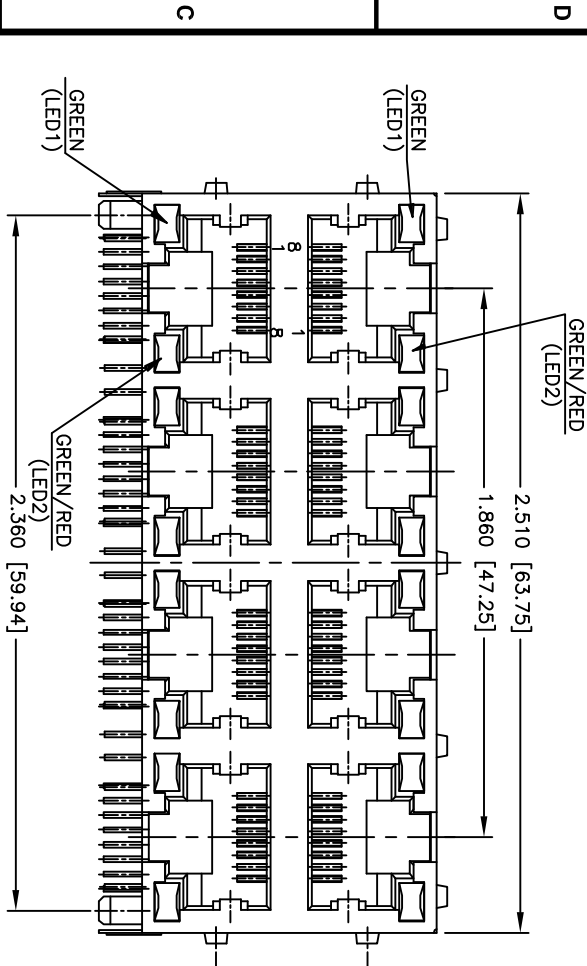

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shield: Brass, Nickel plated

Plating:

Gold over Nickel underplate on contact area, Tin over Copper underplate on PCB tails.

(See chart for thickness)

Electrical:

Operating voltage: 125 VAC max

Current rating: 1.5 Amps max

Contact resistance: 50 mohms max

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:


Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



"X"	PLATING
0	15 uin Gold
1	30 uin Gold
2	50 uin Gold

RECOMMENDED PCB LAYOUT

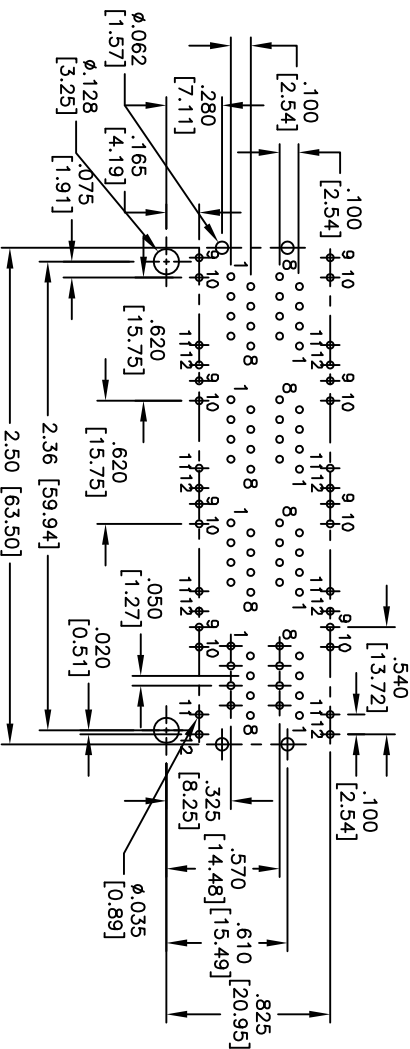

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-0214

MODULAR TELEPHONE JACK GANGED, 8 PORT
8P8C, R/A, WITH LED1 GREEN, LED2 GREEN/RED

SIZE PART NO. MTJG-8-88(X)-FSG-PG-125

CHECKED DATE 10/12/10

APPROVED DATE 10/12/10

REF: S00006C SCALE: NTS SHEET 1 OF 1