


Type	A	A'	B	C	D	T
L-05B	2.0± 0.05	4.0±0.1	0.38± 0.02	0.68± 0.02	2.0± 0.05	Max. 0.44
L-07C	2.0±0.1	4.0±0.1	0.6±0.1	1.1±0.1	2.0±0.1	Max. 1.0
L-14C	4.0±0.1	4.0±0.1	1.0±0.1	1.8±0.1	2.0±0.1	Max. 1.3

Quantity


Type	L-05B	L-07C	L-14C
Quantity/reel	15,000 pcs	10,000 pcs	4,000 pcs
Tape material	Paper	Paper	Paper

Reel Dimensions (Unit: mm)

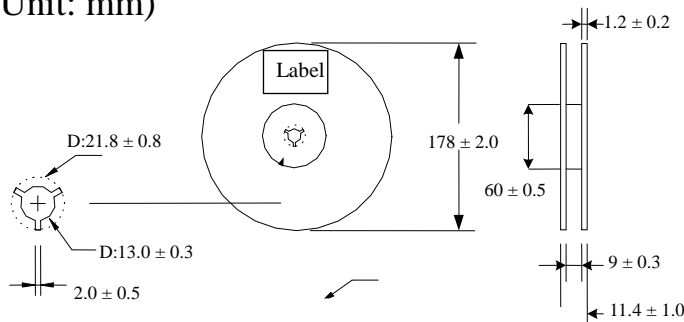


Label: Customer's Name, Johanson P/N, Date

Leader / Trailer Tape (Unit: mm)

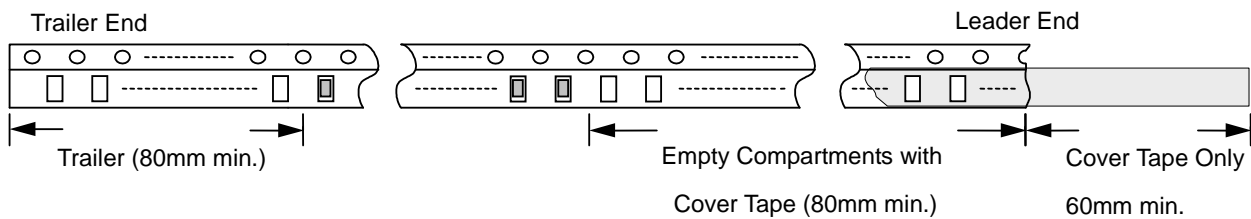

Peel-off Force

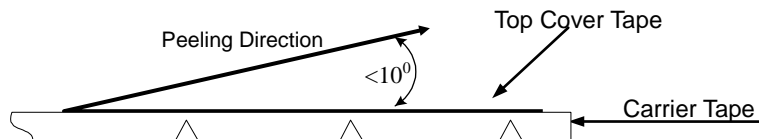


Peel-off force should be in the range of 0.1 – 0.6 N at a peel-off speed of 300±10 mm/min .

Notes

The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.


WIREWOUND INDUCTOR PACKAGING INFORMATION

Reel Dimensions

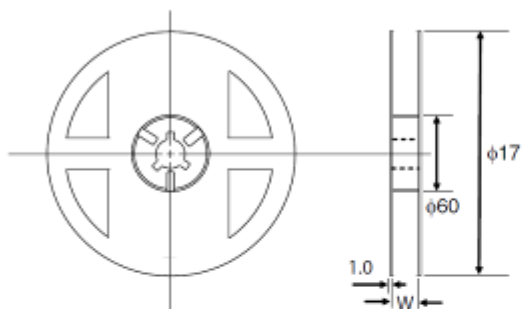

7" DIA. REEL SIZE			
TYPE / SIZE	REEL QUANTITY	TAPE TYPE	TAPE CODE
L-07 / 0402	10,000	Paper	T
L-14 / 0603	3,000	Embossed	E
L-15 / 0805	2,000	Embossed	E

Tape Dimensions

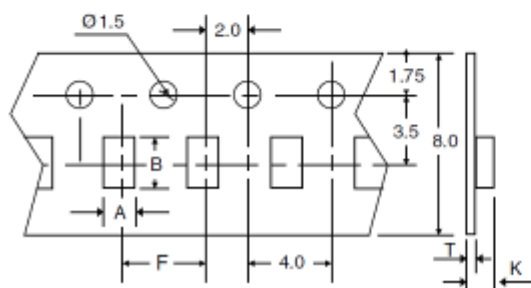

Dimensions (unit: m/m)

TYPE	A	B	F	K	T	W
L-07	0.70	1.20	2.00	-	0.70	8.00
L-14	1.25	1.80	4.00	1.10	0.20	8.00
L-15	1.42	2.26	4.00	1.30	0.20	8.00