



## 2-Electrode Gas Discharge Tubes

20KA



Fast Delivery Time

### 1: Dimension(mm)

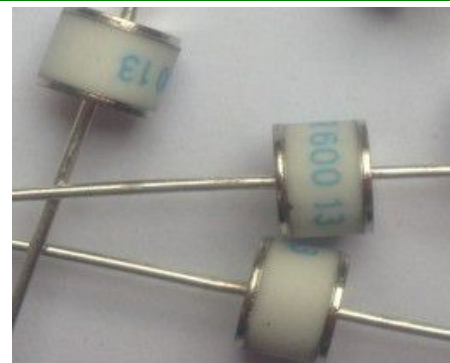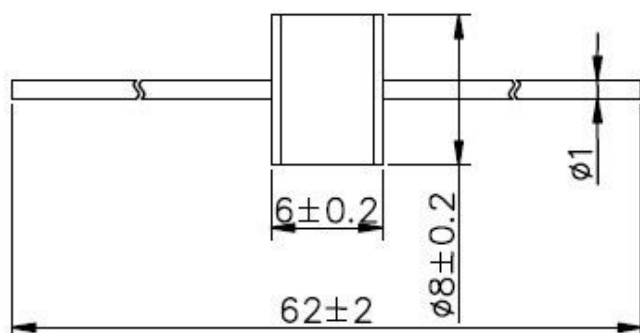

2R-600E Photo

### 2:Main Applications

- PCI Cards protection
- Telephone/Fax/Modem protection
- single line protection
- ADSL/XDSL Splitter,Power Supply
- Surge Protection Device/Surge Protector

### 3:Features

- 100% Lead-Free(RoHs Compliant )
- Non-Radioactive
- Low capacitance ( $\leq 1\text{pF}$ )
- Fast Response-time,High Insulation Resistance.
- Small size :Ø8x6(mm)

### 4 Electrical Characteristics

Part Number	DC Spark-over Voltage @ 100V/S	Impulse Spark-over Voltage @100V/ $\mu\text{s}$	Impulse Spark-over Voltage @1KV/ $\mu\text{s}$	Insulation Resistance	Impulse discharge current(8/20 $\mu\text{s}$ )		AC discharge current (50Hz,1s,10ti mes)	Capacitance (1MHz)
	V	V	V	G $\Omega$	10 Times	1 Time	A	PF
2R-75E	75±20%	<500	<600	>1	20KA	25KA	20	$\leq 1$
2R-90E	90±20%	<500	<600	>1	20KA	25KA	20	$\leq 1$
2R-150E	150±20%	<500	<600	>1	20KA	25KA	20	$\leq 1$
2R-230E	230±20%	<600	<700	>1	20KA	25KA	20	$\leq 1$
2R-250E	250±20%	<600	<700	>1	20KA	25KA	20	$\leq 1$
2R-300E	300±20%	<800	$\leq 900$	>1	20KA	25KA	20	$\leq 1$
2R-350E	350±20%	<900	$\leq 1000$	>1	20KA	25KA	20	$\leq 1$
2R-400E	400±20%	<900	$\leq 1000$	>1	20KA	25KA	20	$\leq 1$
2R-420E	420±20%	<900	$\leq 1000$	>1	20KA	25KA	20	$\leq 1$
2R-470E	470±20%	<1100	$\leq 1200$	>1	20KA	25KA	20	$\leq 1$
2R-500E	500±20%	<1100	$\leq 1200$	>1	20KA	25KA	20	$\leq 1$
2R-600E	600±20%	<1200	$\leq 1300$	>1	20KA	25KA	20	$\leq 1$
2R-800E	800±20%	<1300	$\leq 1400$	>1	20KA	25KA	20	$\leq 1$

Packing Quantity : 100PCS

Shen Zhen HuaXinAn Electronics Co.,Ltd

sales@huaandz.com

abc0734@126.com