

# EM11B

## 1.1 mm Size Metal Shaft Magnetic Type

Compact 10.8 × 1.1 mm (W×D) encoder with long life of 1 million cycles



NEW



### Typical Specifications

Items	Items
Rating	5V±5% DC
Operating life	1,000,000 cycles
Operating temperature range	-30°C to +85°C

### Product Line

Actuator length (mm)	Detent torque (mN·m)	Number of detent	Number of pulse	Operating direction	Push-on switch	Response time	Minimum order unit (pcs.)		Product No.
							Japan	Export	
15	10±5	16	16	Vertical	With	1.3μsec. (typ)	1,000	1,000	<b>EM11B16140A4</b>


### Packing Specifications

Tray


Number of packages (pcs.)		Export package measurements (mm)
1 case /Japan	1 case /export packing	
1,000	2,000	526×370×191

### Dimensions

Unit:mm

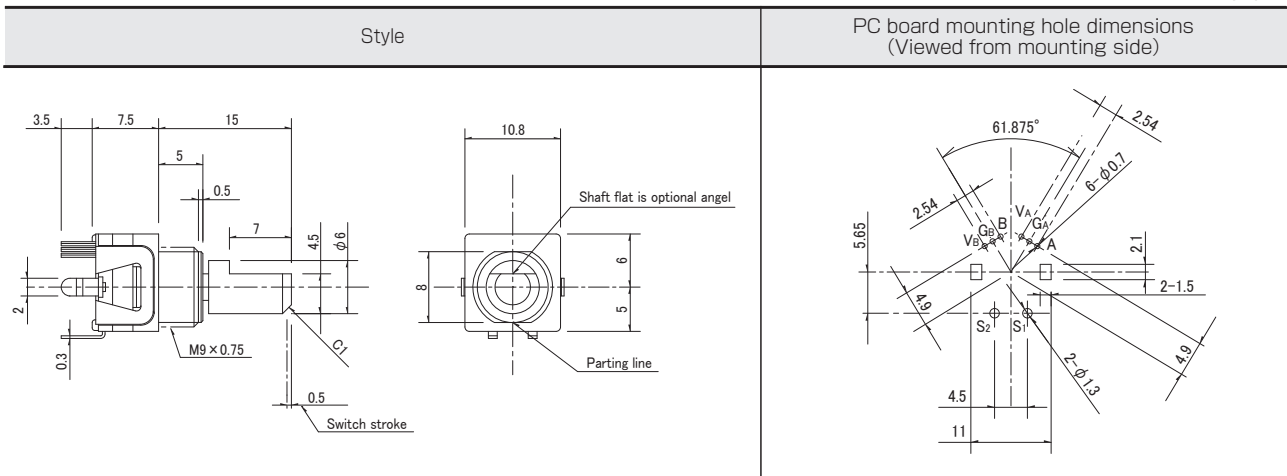

### Block Diagram

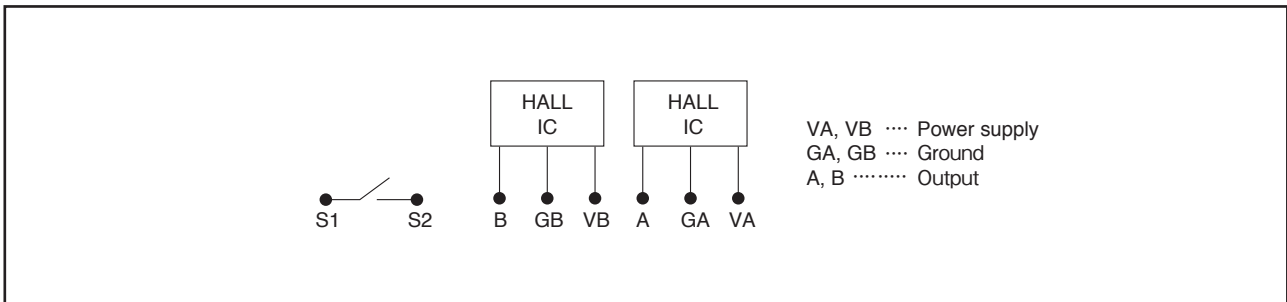

### Notes

1. This products uses a Hall IC. Be aware of ESD damages.
2. Custom design for shaft configuration and mount height are available upon request.

Refer to P.281 for switches.  
Refer to P.307 for soldering conditions.

# 11 mm Size Metal Shaft Magnetic Type/Switch Specifications

Switch type		Momentary push switch
Contact arrangement		Single pole and single throw (Push-on)
Travel (mm)		$0.5 \pm \begin{matrix} 0.3 \\ -0.2 \end{matrix}$
Operating force		$5.5 \pm 3\text{N}$
Operating life		1,000,000 times
Electrical performance	Rating	5mA 5V DC (50mA 12V DC max. ratings)
	Contact resistance	500mΩ max. for initial period, 5Ω max. after operating life.
	Insulation resistance	100MΩ min. 100V DC
	Voltage proof	250V AC for 1 minute or 300V AC for 2s













Encoders

Metal Shaft

Insulated Shaft

Hollow Shaft

Ring Type

Type		Metal shaft																
		11 mm size						20mm size										
Series		EC111		EC11K		EC11J		EM11B	EC20A/RK203		EM20B							
Photo																		
Output		Self-return switch			Incremental (Two phase A and B)													
Shaft types		Single-shaft																
Operating direction		Vertical																
Number of pulse / Number of detent		—		9/18 15/30			16/16		18/18		40/40							
Features		—		—		Surface Mount type		Magnetic type		—								
Dimensions (mm)		W		11.7				10.8		20.2		20						
		D		13		12		14.2		11		19.2	22.25					
		H		5		4.5			7.5		10		13					
Operating temperature range		-40°C to +85°C						-30°C to +85°C	-30°C to +80°C		-10°C to +70°C							
Operating life		15,000 cycles		100,000 cycles			1,000,000 cycles		30,000 cycles		500,000 cycles							
Automotive use		●		●		●		●	●		—							
Life cycle (availability)																		
Electrical performance		Rating		10mA 5V DC				10mA 5V±5% DC		1mA 5V DC		10mA 5V±5% DC						
		Max./min. operating current (Resistive load)		10mA / 1mA				15mA / —		—		15mA / —						
		Insulation resistance		100MΩ min. 250V DC						100MΩ min.100V DC		10MΩ min. 50V DC		100MΩ min. 250V DC				
		Voltage proof		300V AC for 1 minute or 360V AC for 2s		300V AC for 1 minute or 360V AC for 1s			250V AC for 1 minute or 300V AC for 2s		50V AC for 1 minute or 60V AC for 2s		300V AC for 1 minute or 360V AC for 2s					
Mechanical performance		Rotational torque (Without detent)		3 to 30mN·m		—		—		—		7mN·m max.						
		Detent torque		—		12±5mN·m		12±5mN·m (Initial) 12±4mN·m (After reflow)		10±5mN·m		40±20mN·m		8±5mN·m				
		Push-pull strength		100N														
Shaft configuration		Flat, Slotted, Serrated						Flat										
Terminal type		Insertion				Reflow		Insertion										
Switch Specifications		Switch type		Push-on switch														
		Contact arrangement		Single pole and single throw (Push-on)														
		Travel (mm)		0.5±0.3		1.5±0.5		0.5±0.3		1.5±0.5		0.5 ± <sub>0.2</sub> <sup>0.3</sup>		1.5±0.5	0.5 ± <sub>0.3</sub> <sup>0.4</sup>			
		Operating force (N)		6 ± <sub>2</sub> <sup>25</sup>		4±2		5±2		4±2		5±2		4±2		5.5±3	4±2	6±3
		Rating		0.1A 5V DC (500μA 5V DC min. ratings)		0.1A 5V DC (0.1mA 5V DC min. ratings)			5mA 5V DC (50mA 12V DC max. ratings)		0.5A 16V DC (1mA 16V DC min. ratings)		3A 16V DC (10mA 16V DC min. ratings)					
		Contact resistance		100mΩ max. for initial period, 200mΩ max. after operating life.						500mΩ max. for initial period, 5mΩ max. after operating life.		100mΩ max. for initial period, 200mΩ max. after operating life.						
		Operating life		20,000 times		1,000,000 times	100,000 times	1,000,000 times	100,000 times	1,000,000 times		20,000 times		25,000 times				
Page		269						280		282		285						

Encoders Soldering Conditions	307
Encoders Cautions	308

#### Note

- Indicates applicability to all products in the series.

## Reference for Manual Soldering


Series	Tip temperature	Soldering time	No. of solders
<b>EC05E, EC09E, EC10E, EC111, EC11B, EC11E, EC11G, EC11K, EC12D, EC12E, EC18A, EC21A, EC28A, EC35A, EC35AH, EC35B, EC40A, EC45A, EC50A, EC60B, EM11B, EM20B, EC21C</b>	350°C max.	3s max.	1 time
<b>EC11J</b>	350±10°C	3 <sup>+1</sup> <sub>0</sub> s	2 time

## Reference for Dip Soldering

Series	Preheating		Dip soldering		No. of solders
	Soldering surface temperature	Heating time	Soldering temperature	Soldering time	
<b>EC09E, EC11B, EC111, EC11E, EC11G, EC11K, EC18A, EC21A, EC28A, EC35A, EC35AH, EC35B, EC50A, EC60B</b>	100°C max.	2 min. max.	260±5°C	5±1s	2 time max.
<b>EC10E, EC12D, EC12E, EM11B</b>	100°C max.	1 min. max.	260±5°C	3±1s	2 time max.
<b>EC40A</b>	110°C max.	1 min. max.	260°C max.	10s max.	1 time
<b>EC45A</b>	100°C max.	2 min. max.	260°C max.	5s max.	2 time max.
<b>EM20B</b>	80°C max.	1 min. max.	260°C max.	3s max.	2 time max.

## Example of Reflow Soldering Condition

Temperature profile

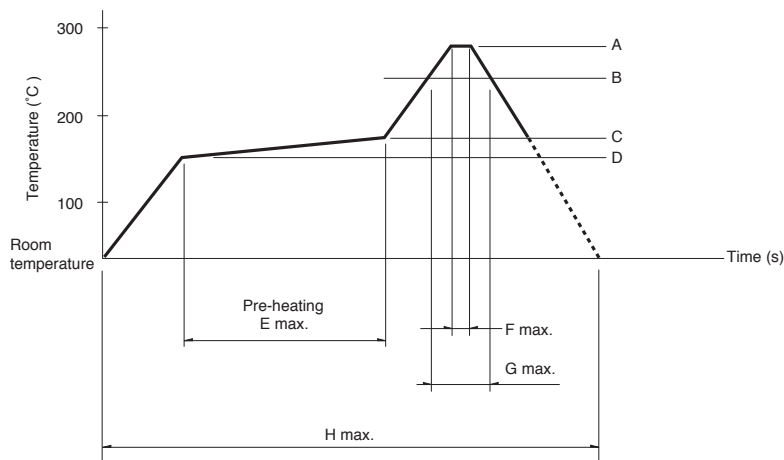

Series	A	B	C	D	E	F	G	H	No. of reflows
<b>EC11J</b>	260°C	230°C	180°C	150°C	2 min. max.	3s	40s	4 min. max.	2 time max.
<b>EC05E</b>	250°C min.	230°C min.	180°C	150°C	60s to 120s	—	30s to 40s	—	2 time max.
<b>EC21C</b>	230°C to 245°C	220°C	200°C	150°C	60s to 120s	—	25s to 60s	300 max.	1 time max.

### 注記

- When using an infrared reflow oven, solder may sometimes not be applied. Be sure to use a hot air reflow oven or a type that uses infrared rays in combination with hot air.
- The temperatures given above are the maximum temperatures at the terminals of the encoder when employing a hot air reflow method. The temperature of the PC board and the surface temperature of the encoder may vary greatly depending on the PC board material, its size and thickness. Ensure that the surface temperature of the encoder does not rise to 250°C or greater.
- Conditions vary to some extent depending on the type of reflow bath used. Be sure to give due consideration to this prior to use.