


SAW Filter

FAR-F6KB-1G5754-B4GE

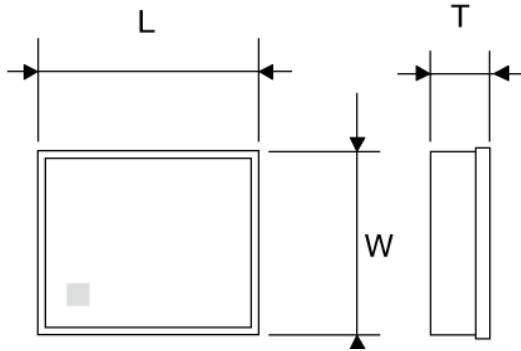

■ Features

- Item Summary
GPS, 504
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Taping Embossed 3000 , 15000pcs

■ Products characteristics table

Temperature Range	-30 to +85°C
Use	GPS
Insertion Loss	1.1 dB
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

■ External Dimensions

L	1.4mm +0.1:-0.1
W	1.0mm +0.1:-0.1
T	0.5mm max

2015.06.03

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GPS (50/100 ohm)	Date	March 31, 2010
Part Number	FAR-F6KB-1G5754-B4GE	Version 3.1c	

Table 1. Electrical specifications

Passband: 1574.42~ 1576.42 MHz						
Item	Condition	Specification			Unit	Remarks
		Min.	Typ.	Max.		
Insertion Loss	1574.42~1576.42 MHz	-	1.1	1.5	dB	
Ripple	1574.42~1576.42 MHz	-	0.1	0.6	dB	
Absolute attenuation	824~849 MHz	36	43	-	dB	
	880~915 MHz	36	41	-	dB	
	1475.42 MHz	28	36	-	dB	
	1525.42 MHz	25	40	-	dB	
	1625.42 MHz	13	19	-	dB	
	1675.42 MHz	15	23	-	dB	
	1710~1785 MHz	19	25	-	dB	
	1850~1910 MHz	30	37	-	dB	
	1920~1980 MHz	33	41	-	dB	
VSWR (Input)	1574.42~1576.42 MHz	-	1.4	1.9	-	
VSWR (Output)	1574.42~1576.42 MHz	-	1.4	1.9	-	
Amplitude Balance S21 / S31	1574.42~1576.42 MHz	-1.1	+0.2/ +0.3	+1.1	dB	
Phase Balance (Φ S21- Φ S31)-180	1574.42~1576.42 MHz	-11	+3.9/ +4.2	+11	deg.	
Input Impedance	Unbalanced	50			ohm	
Output Impedance	Balance	100			ohm	
Operating Temperature		-30 ~ +85			°C	
Device size		1.4typ.x1.0typ.x0.5max.			mm	




MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GPS (50/100 ohm)	Date	March 31, 2010
Part Number	FAR-F6KB-1G5754-B4GE	Version 3.1c	

Dimension

Device size: 1.4typ. x 1.0typ. x 0.5max.

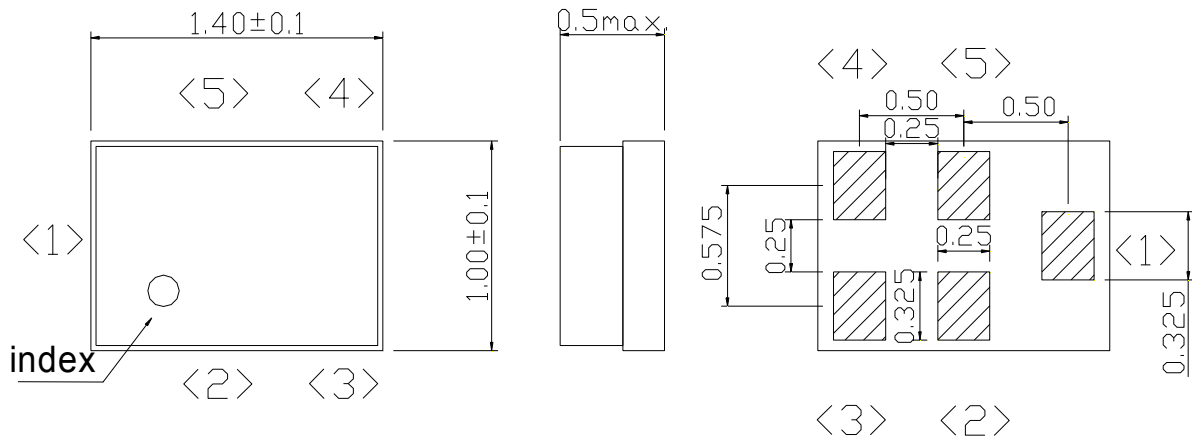


Unit: mm

Pin Configuration

Pin No.	Symbol	Function
1	IN	Unbalanced pin
2	GND	Ground
3	OUT	Balanced pin
4	OUT	Balanced pin
5	GND	Ground

Evaluation Circuit

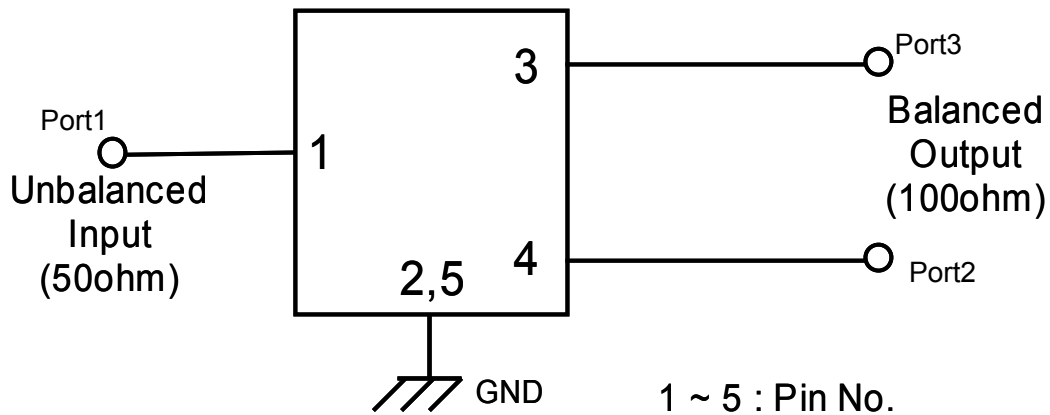



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GPS (50/100 ohm)	Date	March 31, 2010
Part Number	FAR-F6KB-1G5754-B4GE	Version 3.1c	

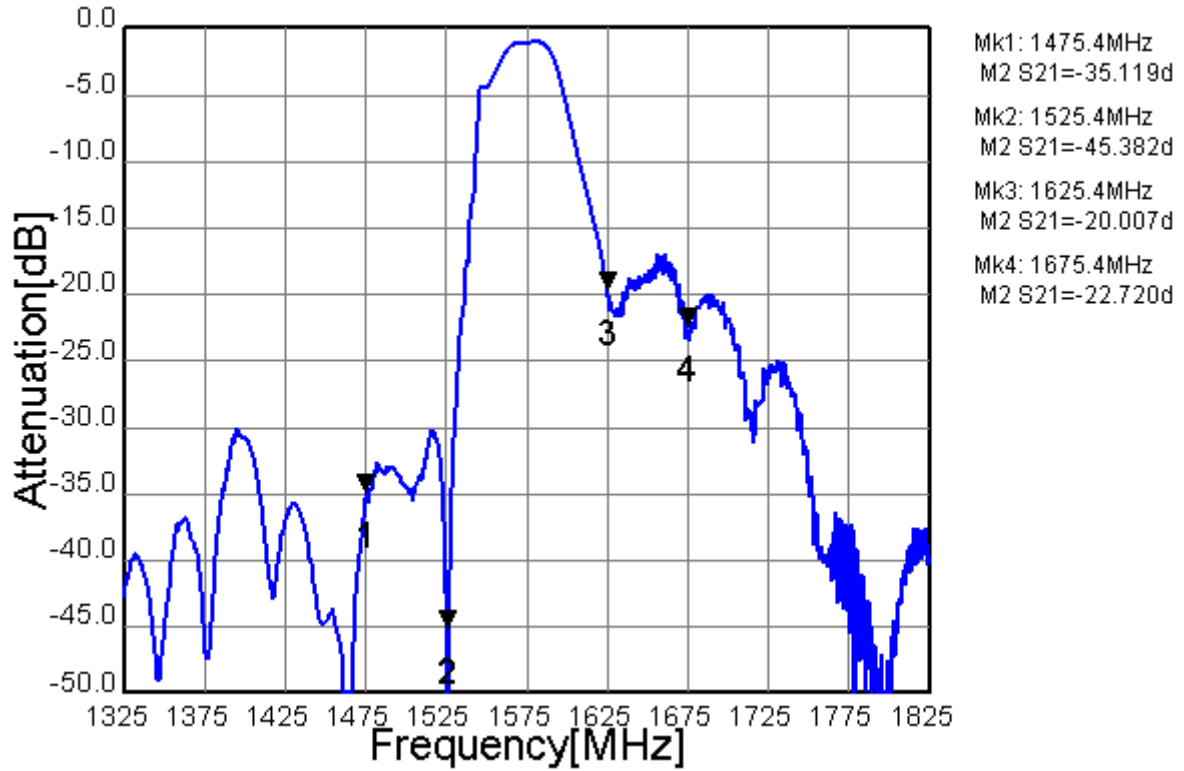


Fig.1 Pass-band Characteristic

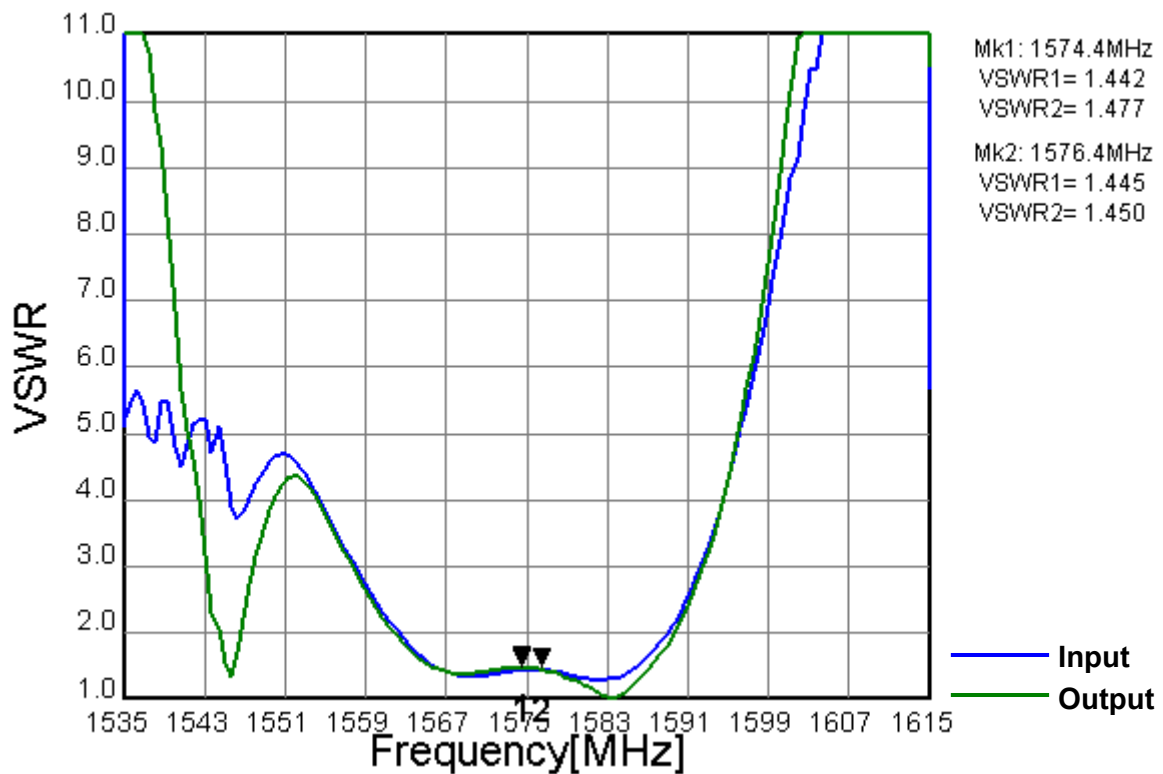


Fig.2 VSWR



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GPS (50/100 ohm)	Date	March 31, 2010
Part Number	FAR-F6KB-1G5754-B4GE	Version 3.1c	

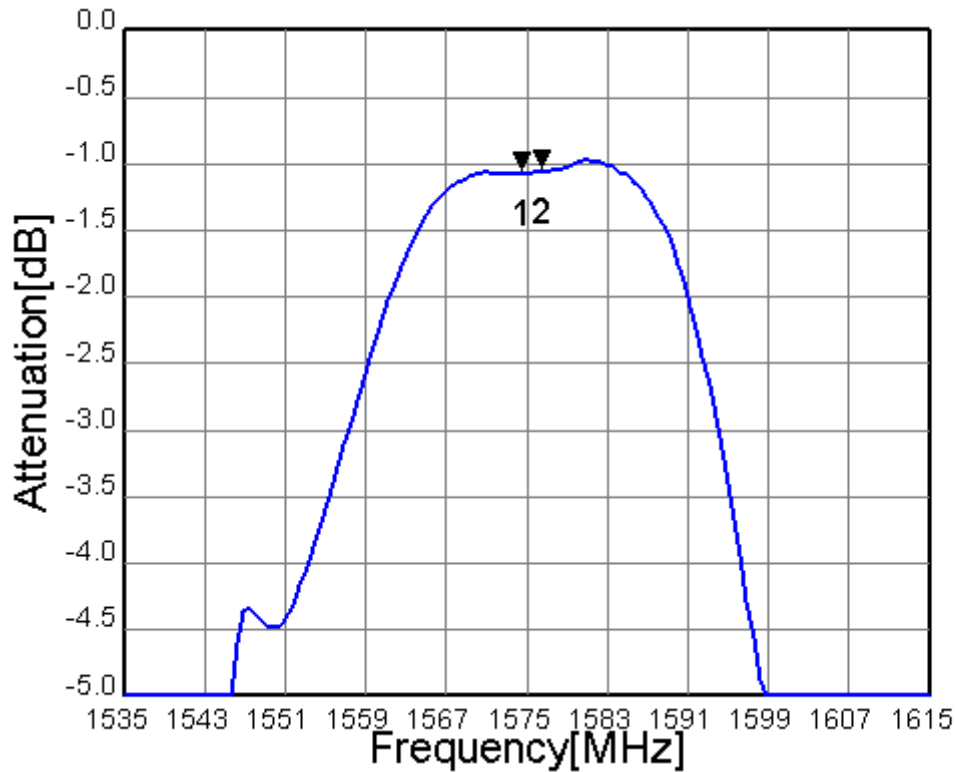


Fig.3 In-band Characteristic

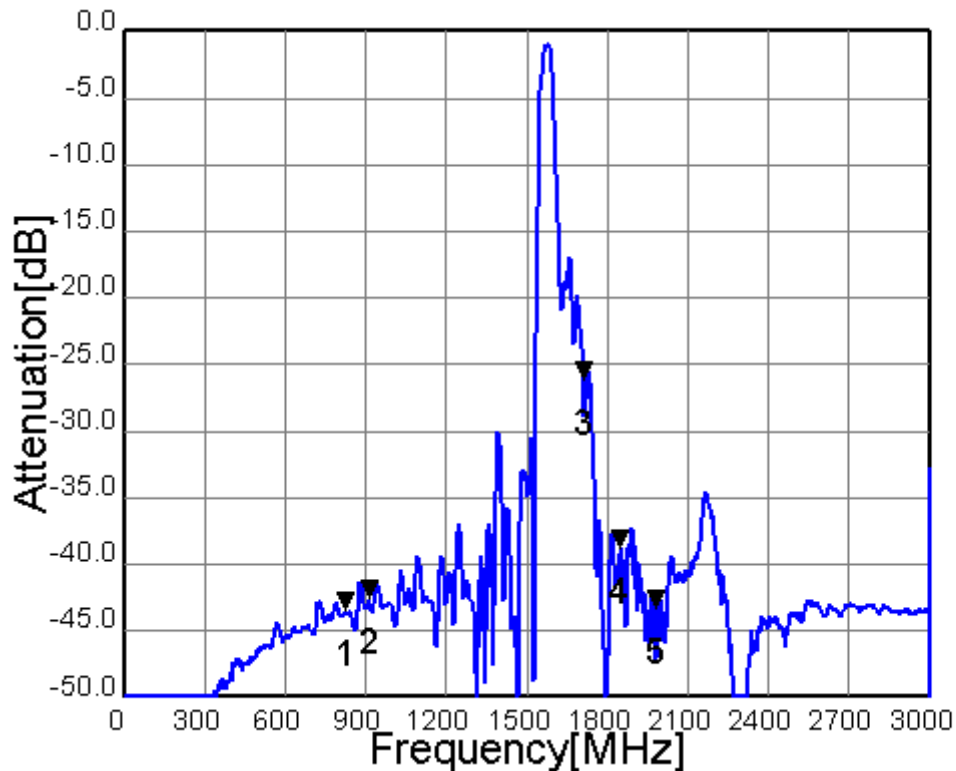



Fig.4 Wide-band Characteristic



MSL1


* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GPS (50/100 ohm)	Date	March 31, 2010
Part Number	FAR-F6KB-1G5754-B4GE	Version 3.1c	

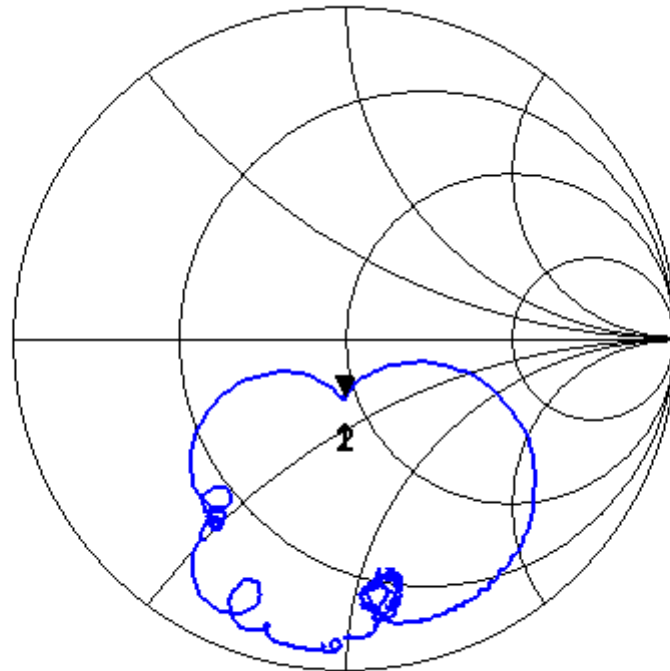

Mk1: 1574.4
 $S_{11} = 0.917 - j 0.342$
 Mk2: 1576.4
 $S_{11} = 0.931 - j 0.351$

Fig.5 Input Impedance

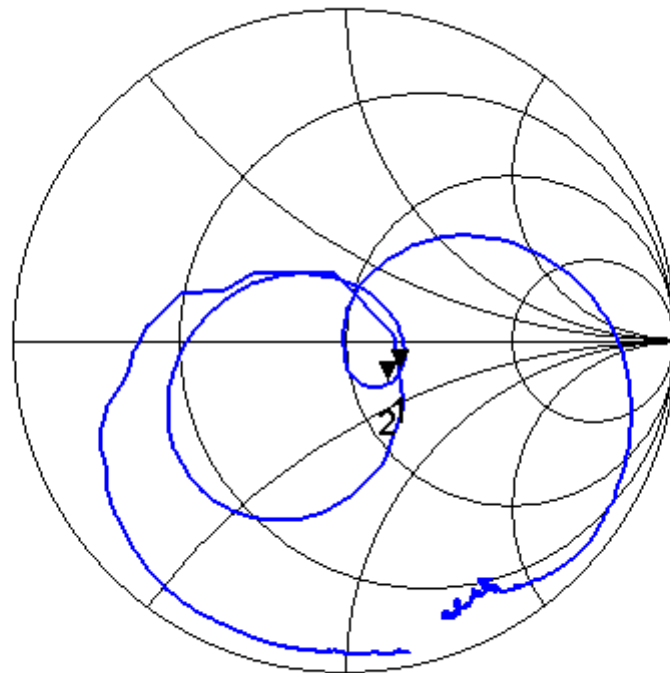

Mk1: 1574.4
 $S_{22} = 1.369 - j 0.274$
 Mk2: 1576.4
 $S_{22} = 1.250 - j 0.337$

Fig.6 Output Impedance



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GPS (50/100 ohm)	Date	March 31, 2010
Part Number	FAR-F6KB-1G5754-B4GE	Version 3.1c	

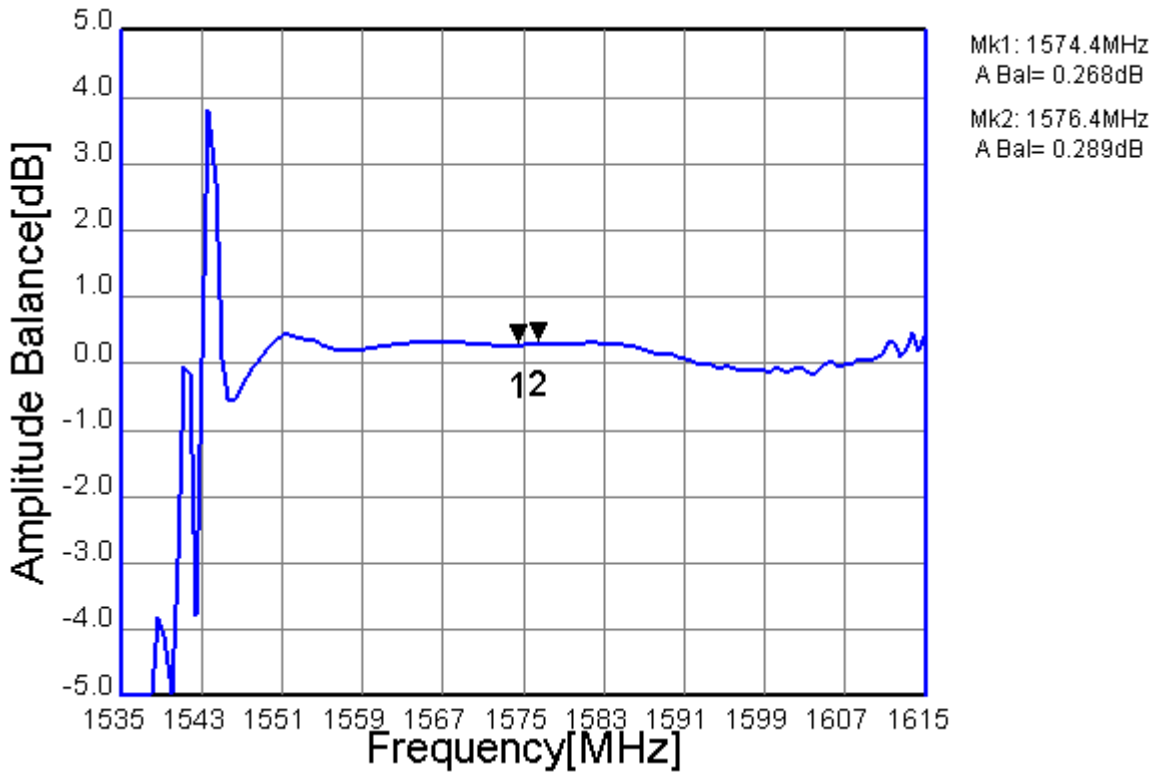


Fig.7 Amplitude Balance

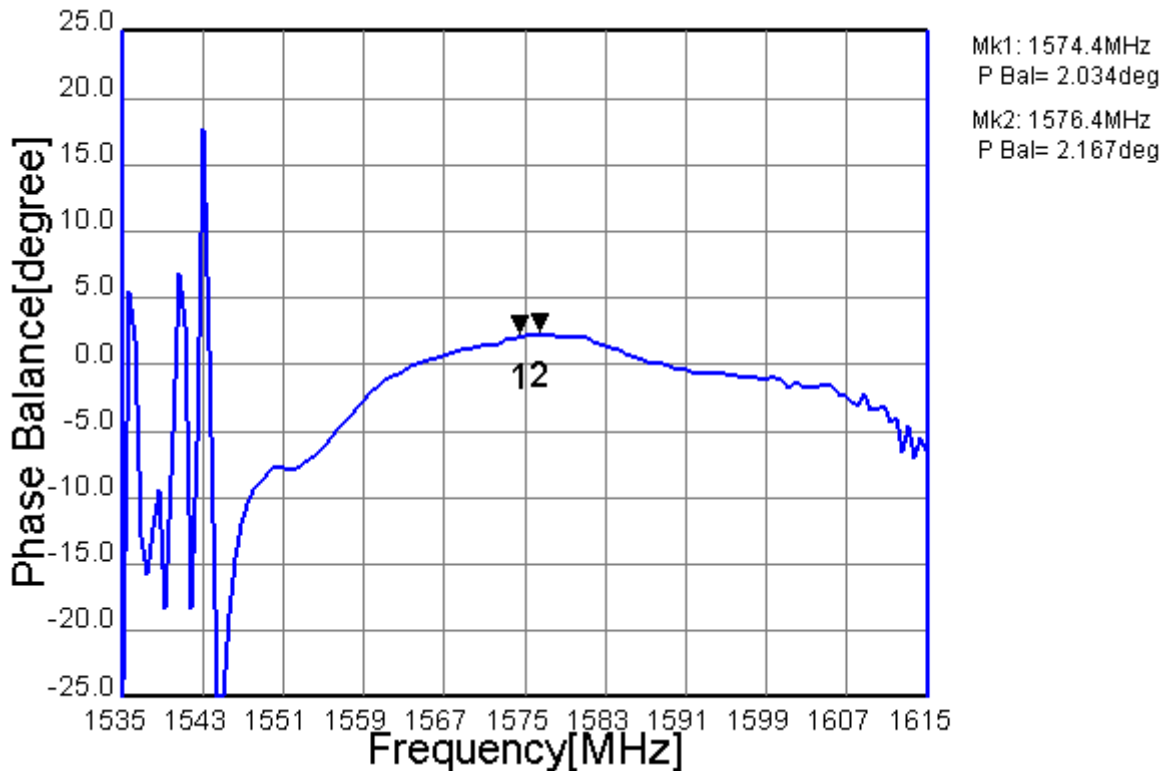


Fig.8 Phase Balance