

iCON-101CU

1-port CAN to USB Industrial Converter
(-40°C ~ +70°C)



Features

- Full compliance with USB 1.1/2.0 (fully speed)
- Full compliance with CAN 2.0A and CAN 2.0B
- D-sub DB9 CAN port supports 3KV isolation
- Easily setup to CAN terminator by software configuring
- CAN transmission speed up to 1Mbps
- Powered by the USB bus
- USB type B connector Complies with Class 1, DIV II minimum withdrawal requirement of 15N
- Provides DIN-Rail mounting, Status LED indicators
- Driver supports Windows Server 2008; 2003/Vista/2000/XP/7 and Linux OS
- -40°C ~ +70°C wide temperature operating suitable for industrial automation and power automation field applications



Introduction

The CAN (Controller Area Network) is a serial bus system and is usually used in structuring intelligent industrial device networks and building smart automatic control systems. The iCON-101CU is a cost-efficient industrial converter for pairs to PC using the standard USB interface. It supports CAN monitor tool and displays the CAN message received in Decimal or HEX mode. This converter shows the time stamp of each receiving message. The GUI management program and programming guide both are ready for use. The CAN host, monitor or HMI can access & control CAN device through iCON-101CU. Operating systems support includes Windows® 98/ME/2000/XP.

Specifications

CAN Interface	
Connector	9-pin male D-Sub
Isolation	3 KVrms for DC-DC and photocoupler
Receive Buffer	1000 data frames
NVRAM	64Kbyte for users define
Max Data Flow	10000 fps (CAN bus)
Support Protocol	CAN 2.0A/2.0B
Terminator Resistor	Software configurable
Baud Rate	5k,10k, 20k, 40k, 50k, 80k, 100k,125k, 200k, 250k, 400k, 500k, 600k, 800k ,1Mbps and user defined

USB Interface

Support Protocol	USB 1.1/2.0
Connector	USB type B
Receiver Buffer	1000 data frames

Power

Power Consumption	0.7W max.
-------------------	-----------

LED

Power/firmware updating, CAN TX/RCV, CAN status for normal and error, USB TX/RCV, terminator status

OS Driver Support

Windows® Server 2008; 2003/Vista/2000/XP/7 and Linux OS

Mechanical

Casing	Aluminum case
Dimension	70 mm (W) x 110 mm (D) x 30 mm (H) (2.75" (W) x 4.33" (D) x 1.18" (H))
Weight	0.25 kg (0.55 lb)
Installation	DIN-rail and panel mount


Environment

Operating Temperature	-40° C to +70° C (-40° F to +167° F)
Storage Temperature	-40° C to +85° C (-40° F to 185° F)
Humidity	5% ~ 95% (non-condensing)
Emission Compliance	CE class A, FCC class A


Ordering Information

iCON-101CU

1-port CAN to USB industrial converter

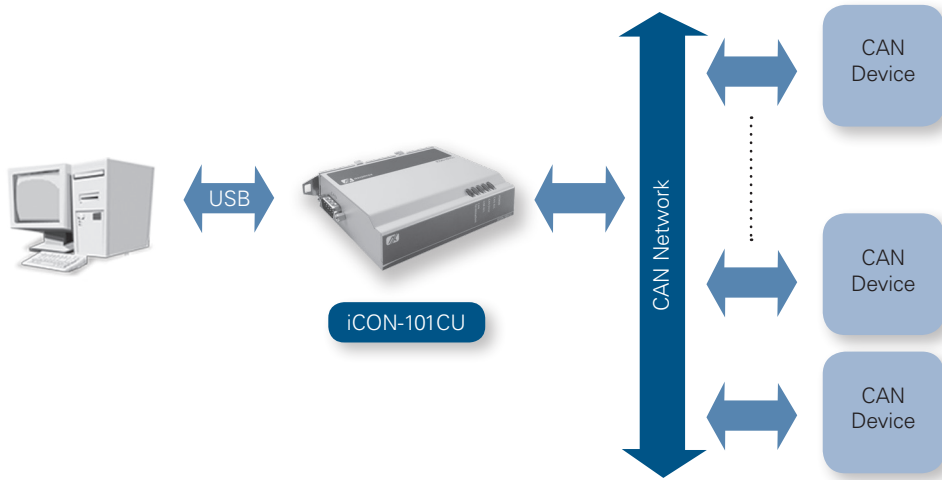

Dimensions

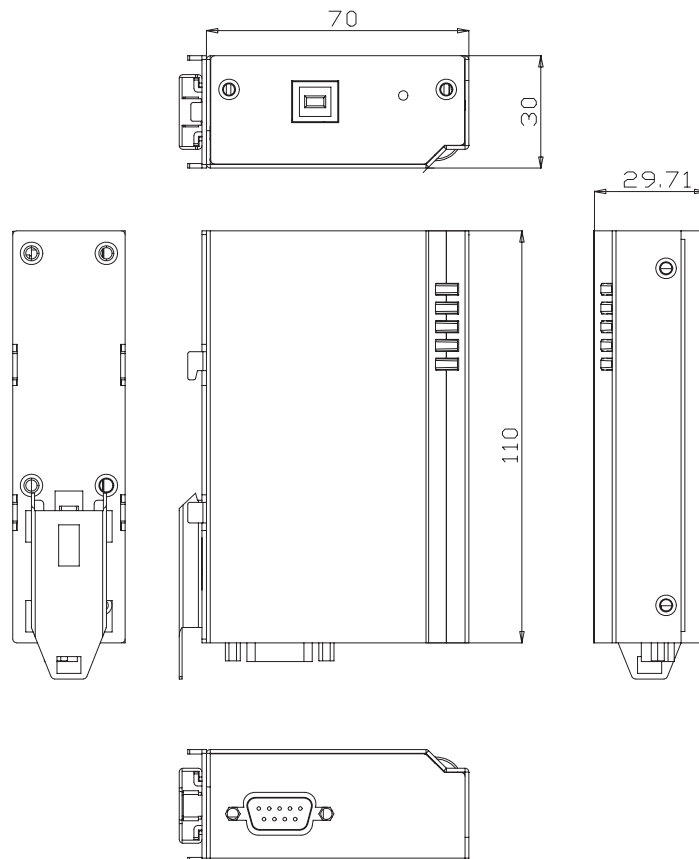

Overview

Embedded Systems

Embedded Systems for Transportation

Embedded Field Controllers

Industrial Firewall

Digital Signage Solutions

Embedded MicroBoxes

Industrial Barebone Systems

Industrial Chassis

Backplanes

Power Supplies

11

Peripherals & Accessories

