
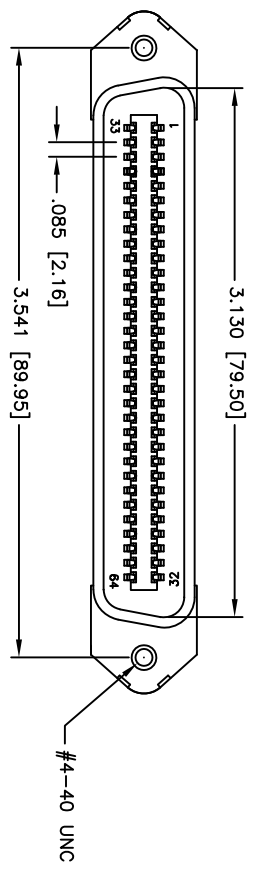

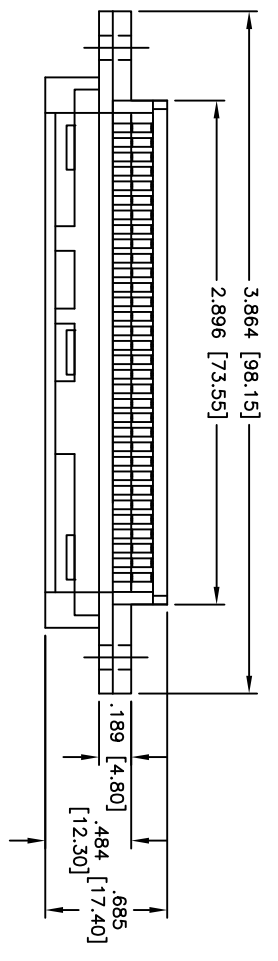


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/03/10	

APPROVED: _____
 DATE: _____ TITLE: _____

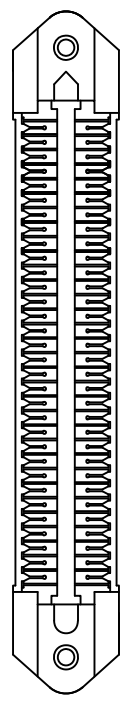

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
Contacts: Phosphor Bronze
Plating:
 Gold flash over Nickel underplate on mating area,
 Tin over Copper underplate on tails
Electrical:
 Current rating: 1 Amp max
 Contact resistance: 25 mohms max
 Insulation resistance: 10,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +125°C
 Environmental:
 Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RIBBON CABLE IDC TYPE CONNECTOR
 64PIN MALE ALL PLASTIC

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	5/03/10
CHECKED	
APPROVED	

SIZE X	PART NO. MR64+PE-34	REV.
REF: S00150T	SCALE: NTS	SHEET 1 OF 1