


SMD Power Inductors (NR series)

NR5040T470M

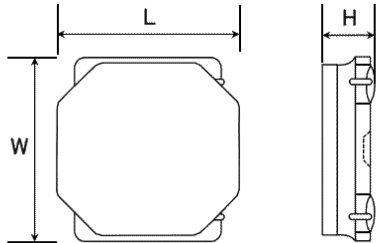

■ Features

- Item Summary
47 μ H($\pm 20\%$), 1100mA, 900mA
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Taping 1500pcs

■ Products characteristics table

CaseSize (EIA/JIS)	-/5050
Inductance	47 μ H($\pm 20\%$)
Inductance Measuring Frequency	100kHz
Rated Current -Saturation Current	1100mA
Rated Current -Temperature Rise Current	900mA
DC Resistance (max)	0.403 Ω
Avg. of DC.Resistance	0.31 Ω
Self-resonant Frequency (min)	6MHz
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow


■ External Dimensions

L	4.9mm ± 0.2
W	4.9mm ± 0.2
H	4mm max

■ Recommended Land Patterns

【推奨ランドパターン】
 実装上の注意
 ・実装状態を確認の上で使用ください。また、ご購入の際は、
 ・本製品のほんだ付けはフラットハンダ工法に準じます。

【Recommended Land Patterns】
 Surface Mounting
 ・Mounting and soldering conditions should be checked beforehand
 ・Applicable soldering process to these products is reflow soldering only.



SMD Power Inductors (NR series/NR series H type/S type /V type)

Type	A	B	C
NR5010			
NR5012			
NR5014			
NR5020	1.5	3.6	4
NR5024			
NR5030			
NR 5040, NR5040			

unit:mm

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.