


Ultra Fast Recovery Diodes

US1AF ~ US1MF

■ Features

- Glass Passivated Chip
- Low Forward Voltage Drop And High Current Capability
- Low Reverse Leakage Current
- Epoxy meets UL 94 V-0 flammability rating
- Ultra Fast Switching For High Efficiency

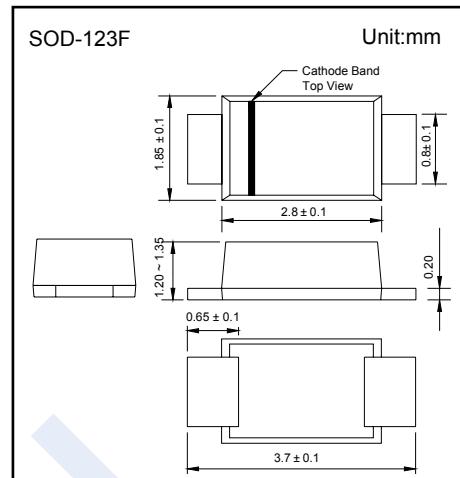

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	US 1AF	US 1BF	US 1CF	US 1DF	US 1GF	US 1JF	US 1KF	US 1MF	Unit
Repetitive Peak Reverse Voltage	V _{RRM}	50	100	150	200	400	600	800	1000	V
RMS Voltage	V _{RMS}	35	70	105	140	280	420	560	700	
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	400	600	800	1000	
Averaged Forward Current, T _L =110°C	I _{FAV}						1			A
Peak Forward Surge Current @ 8.3ms	I _{FSM}						30			
Thermal Resistance Junction to Ambient	R _{θ JA}						30			°C/W
Junction Temperature	T _j						150			°C
Operating Temperature	T _{OP}						-65 to 175			
Storage Temperature	T _{STG}						-65 to 175			

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Forward voltage	US1AF-1DF	V _F	I _{FM} =1A, T _j = 25°C			1	V
	US1GF					1.4	
	US1JF-1MF					1.7	
Reverse voltage leakage current	I _R		T _a = 25°C			10	uA
			T _a = 100°C			100	
Reverse Recovery Time	US1AF-US1GF	T _{rr}	I _F =0.5A, I _R =1A, I _{rr} =0.25A			50	ns
	US1JF-US1KF					75	
	US1MF					100	
Typical Junction Capacitance	US1AF-1GF	C _J	V _R =4V, f=1MHz			20	pF
	US1JF-1MF					17	

■ Marking


NO.	US1AF	US1BF	US1CF	US1DF	US1GF	US1JF	US1KF	US1MF
Marking	US1A	US1B	US1C	US1D	US1G	US1J	US1K	US1M

Ultra Fast Recovery Diodes

US1AF ~ US1MF


■ Typical Characteristics

Figure 1
Typical Forward Characteristics

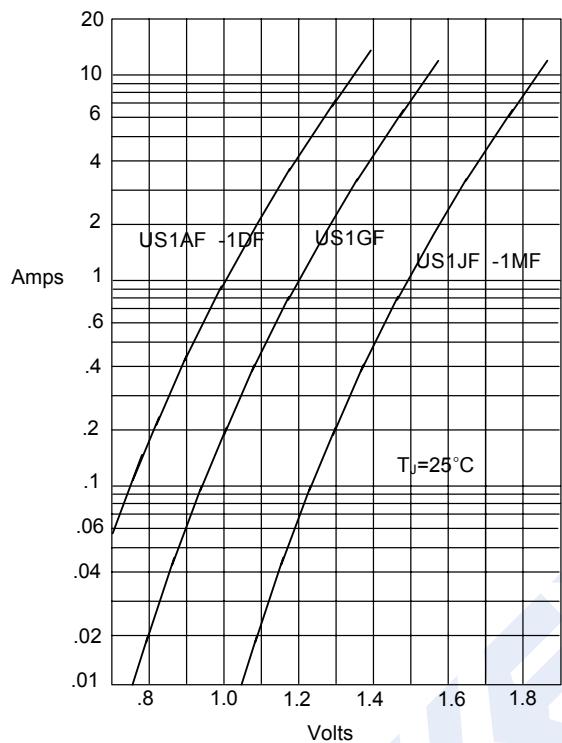


Instantaneous Forward Current - Amperes versus
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

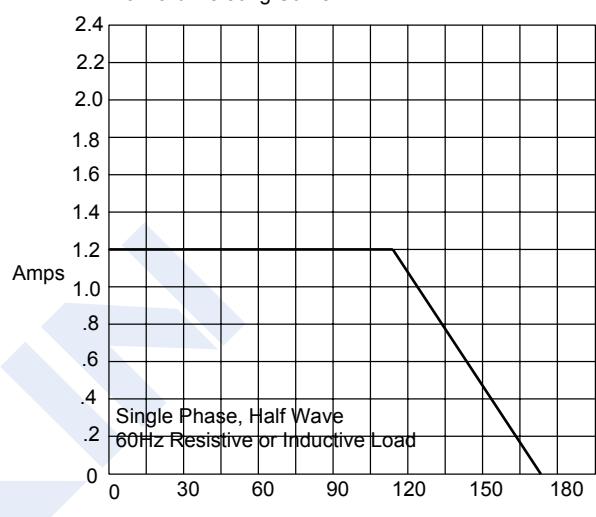

Average Forward Rectified Current - Amperes versus
Lead Temperature - $^\circ\text{C}$

Figure 3
Junction Capacitance

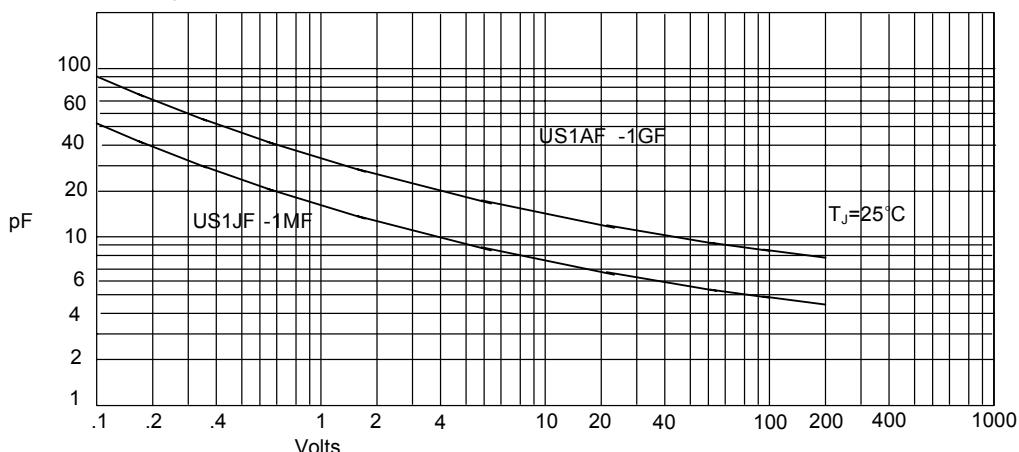


Junction Capacitance - pF versus
Reverse Voltage - Volts

Ultra Fast Recovery Diodes

US1AF ~ US1MF


■ Typical Characteristics

Figure 4
Peak Forward Surge Current

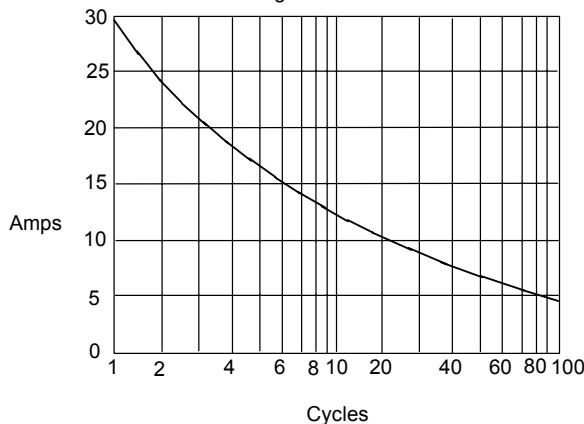


Peak Forward Surge Current - Amperes versus
Number Of Cycles At 60Hz - Cycles

Figure 5
Peak Forward Surge Current

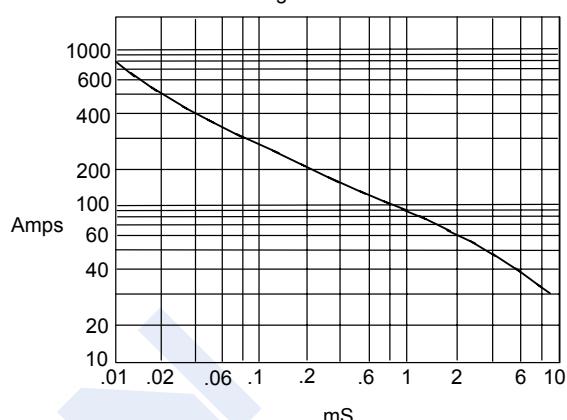

Peak Forward Surge Current - Amperes versus
Pulse Duration - Milliseconds (mS)

Figure 6
Reverse Recovery Time Characteristic And Test Circuit Diagram

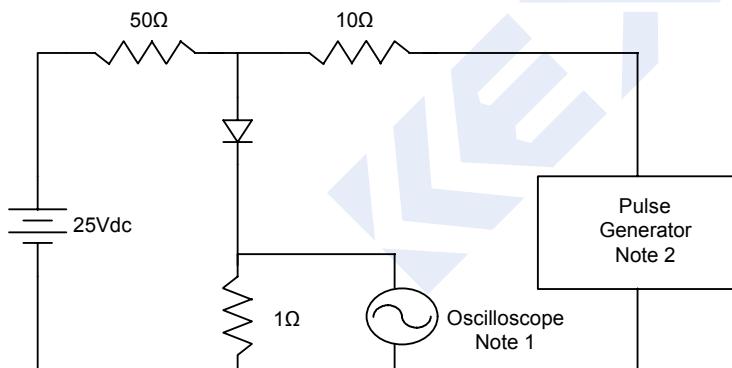

Notes:

1. Rise Time = 7ns max.
- Input impedance = 1 megohm, 22pF
2. Rise Time = 10ns max.
- Source impedance = 50 ohms
3. Resistors are non-inductive

