

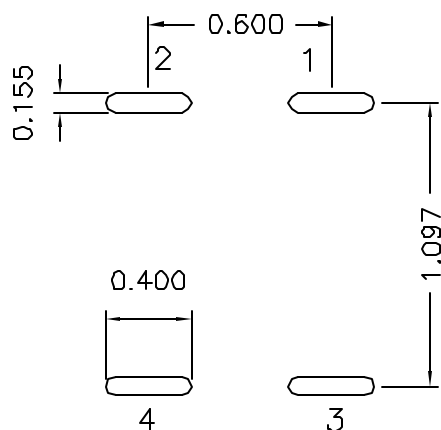
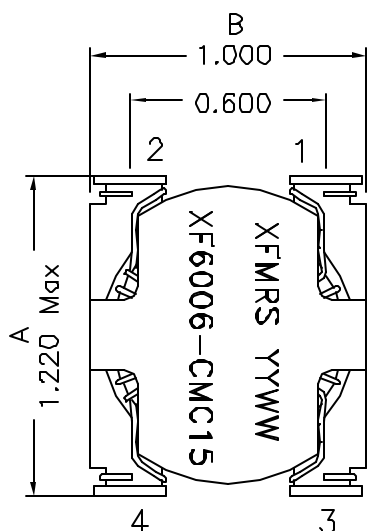



1. Mechanical Dimensions:

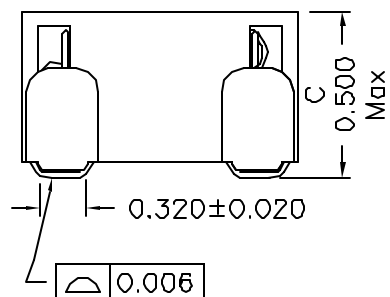

(SUGGESTED MOUNTING PAD)

2. Schematic:



3. Electrical Specifications:

OCL: 600uH Min @1KHz 1.0V, Each Wdg

Q: 5 Min @1KHz 1.0V, Each Wdg

DCR: 0.023 Ohms Max, Each Wdg

Irated: 6Aac

Isolation: 2000Vrms for 1 Min

Rated Voltage: 250Vac

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004" (0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component
11. 260°C IR Reflow Compatible

XFMRS Inc www.XFMRS.com	Title: Common Mode Choke			
	UNLESS OTHERWISE SPECIFIED TOLERANCES:	P/N: XF6006-CMC15	REV. A	
.xx ±0.25	DWN.	Xianyi	Nov-13-09	
Dimensions in MM	CHK.	YK Liao	Nov-13-09	
SHEET 1 OF 1	APP.	Joe Huff	Nov-13-09	

DOC REV: A/1

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.