


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD


M55339/04-00030

REVISIONS	
ISSUE	CHANGES
8	CN 33402 E REDRAWN WJM 10/01/91
9	CN 35618 D KH 01/09/95

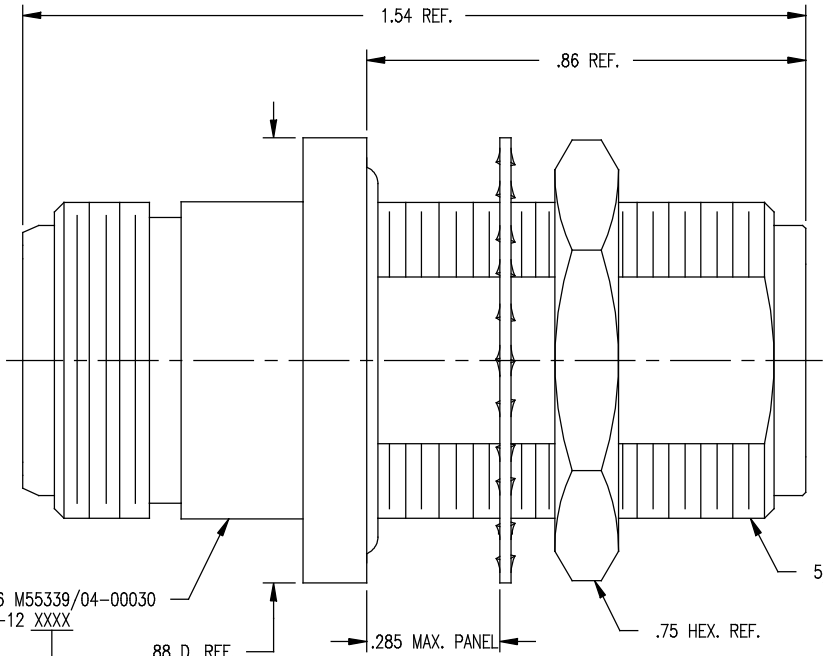

STAMP: 91836 M55339/04-00030
1209-12 XXXX
DATE CODE

- NOTES:
- INTERFACES PER MIL-STD-348, FIG. 304-2.
 - MATERIALS:
 CENTER CONTACT: BER. COOPER, ASTM-B-196
 O-RING: SYNTHETIC RUBBER, MIL-P-25732
 LOCKWASHER: PHOSPHOR BRONZE, QQ-B-750
 GLASS SEAL: CORNIG (E.I.#10) GLASS BONDED TO C.R.S. BAND AND CENTER.
 ALL OTHER METAL PARTS: BRASS, ASTM-B16
 - FINISHES:
 CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
 ALL OTHER METAL PARTS: SILVER PLATE, PER QQ-S-365
 - ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 50 OHMS
 WORKING VOLTAGE: 1000 VRMS
 FREQUENCY RANGE: DC TO 11 GHZ.
 - ENVIRONMENTAL CHARACTERISTICS:
 LEAKAGE RATE SHALL NOT EXCEED 10^{-7} cc/SEC. OF TRACER GAS AT ATMOSPHERIC PRESSURE.



MOUNTING HOLE

GSD

WJM1413	
SCALE	4:1
APPROX SURFACE AREA	
	1209-12
USED ON	
REF:	
ADAPTER, F-F, BULKHEAD, N (HERMETIC SEAL)	
DRAWN WJM	DATE 10/01/91
DESIGN MJB	DATE 10/11/91
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

M55339/04-00030