4850, 4-pole, Socket, PCB terminals, DIN Plug/Socket







Description


- PCB Mounting :
- Screw-on mounting, from rear-side
- DIN Plug: 4-pole , straight

Technical Data

Diameter	9.0 mm		
Number of Poles	4-pole		
Ratings DC	1 A / 12 VDC		
Ratings AC	1 A / 100 VAC		
Dielectric Strength	250 VAC		
Insulation Resistance	> 50 MΩ @ 250 VDC		

Allowable Operation Temp.	-20 °C to 70 °C	
Terminal	PCB terminals silver plated	
Mounting	Screw-on mounting wall thickness max. 2.0 mm	
Lifetime	5000 Insertions	

Dimensions

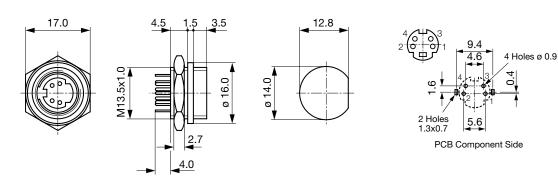

All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
DIN Plug/Socket	9.0	4-pole	PCB terminals	4850.2400

 $\label{thm:comsum} \mbox{Availability for all products can be searched real-time: http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER} \mbox{\cite{thm:com/Stock-Check-SCHURTER}} \mbox{\cite{$

250 Pcs Packaging unit

4850.1410

Mating Inlets/Plugs

Category / Description



DIN Plug/Socket Overview complete

4850, 4-pole, Plug, solder terminal, DIN Plug/Socket

DIN Plug/Socket further types to 4850.2400