

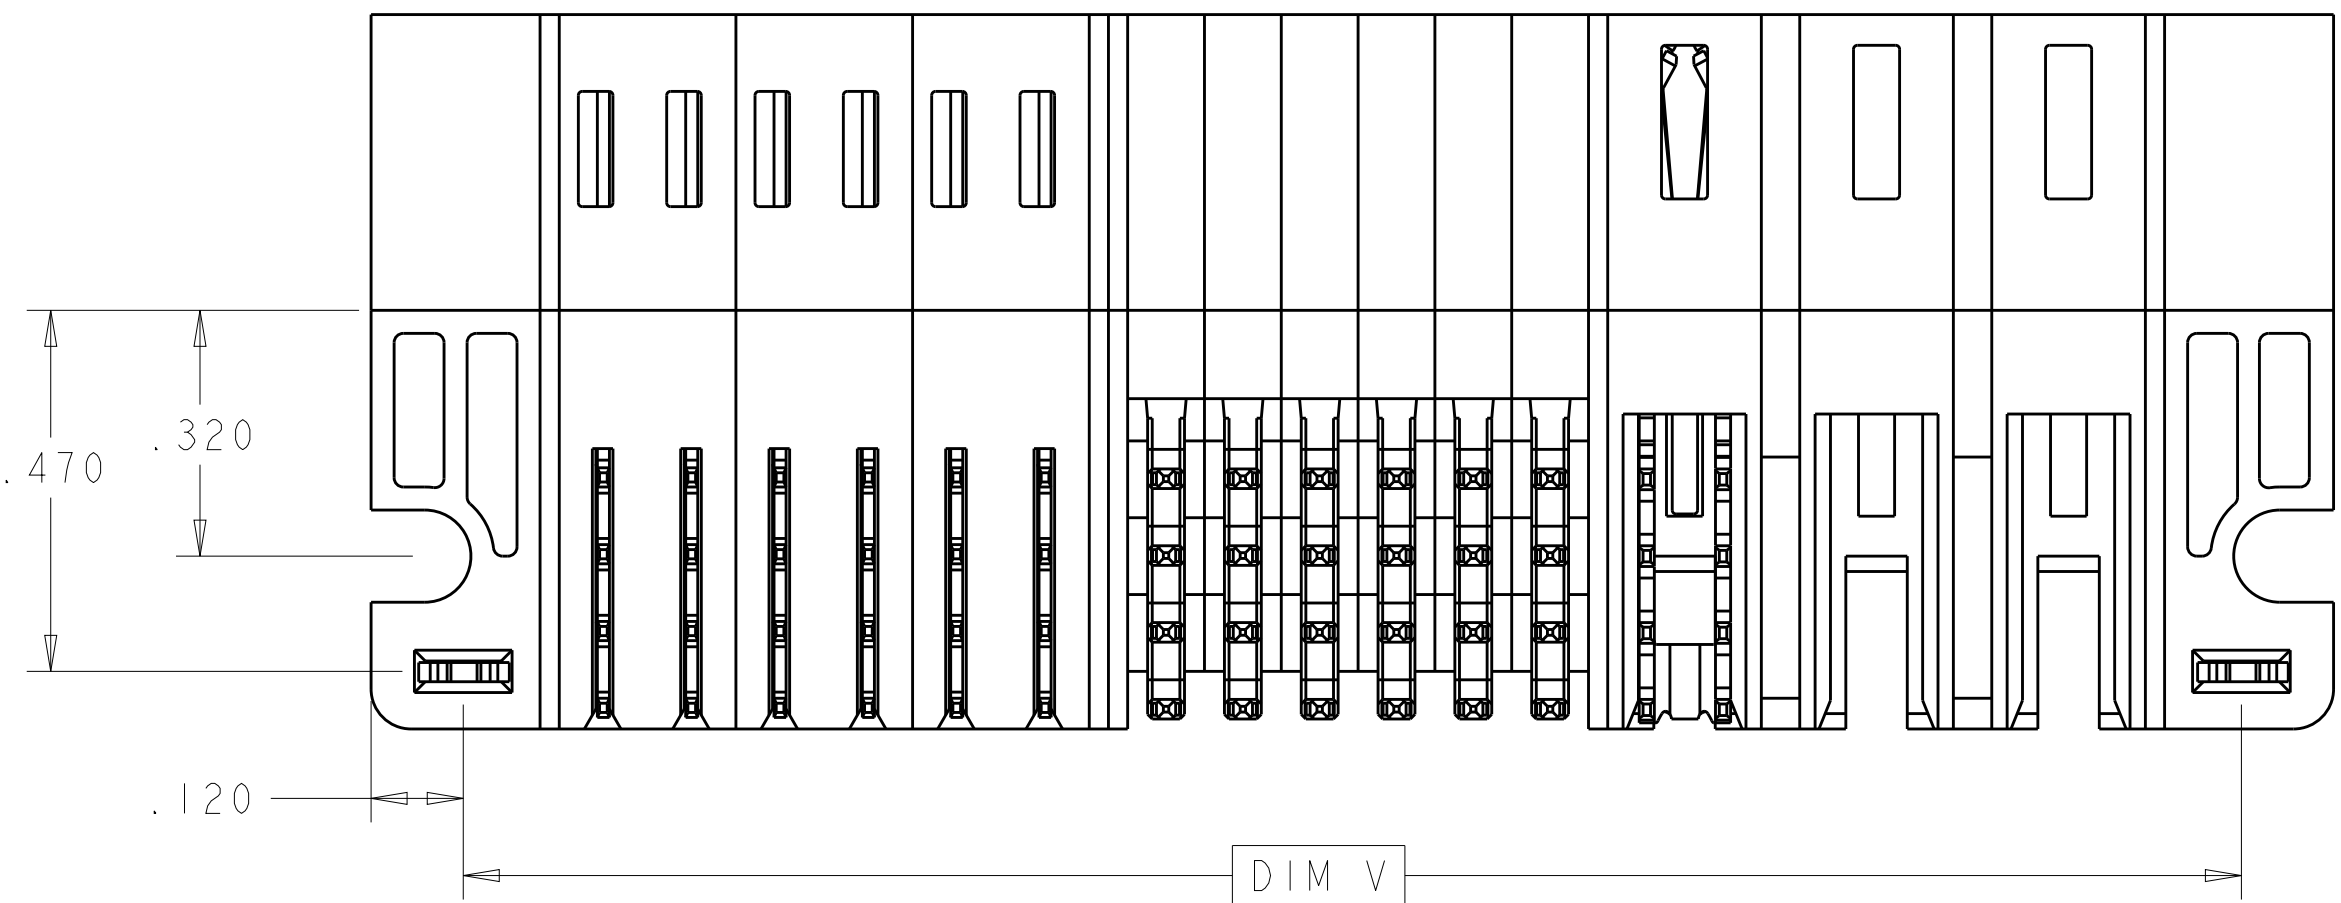
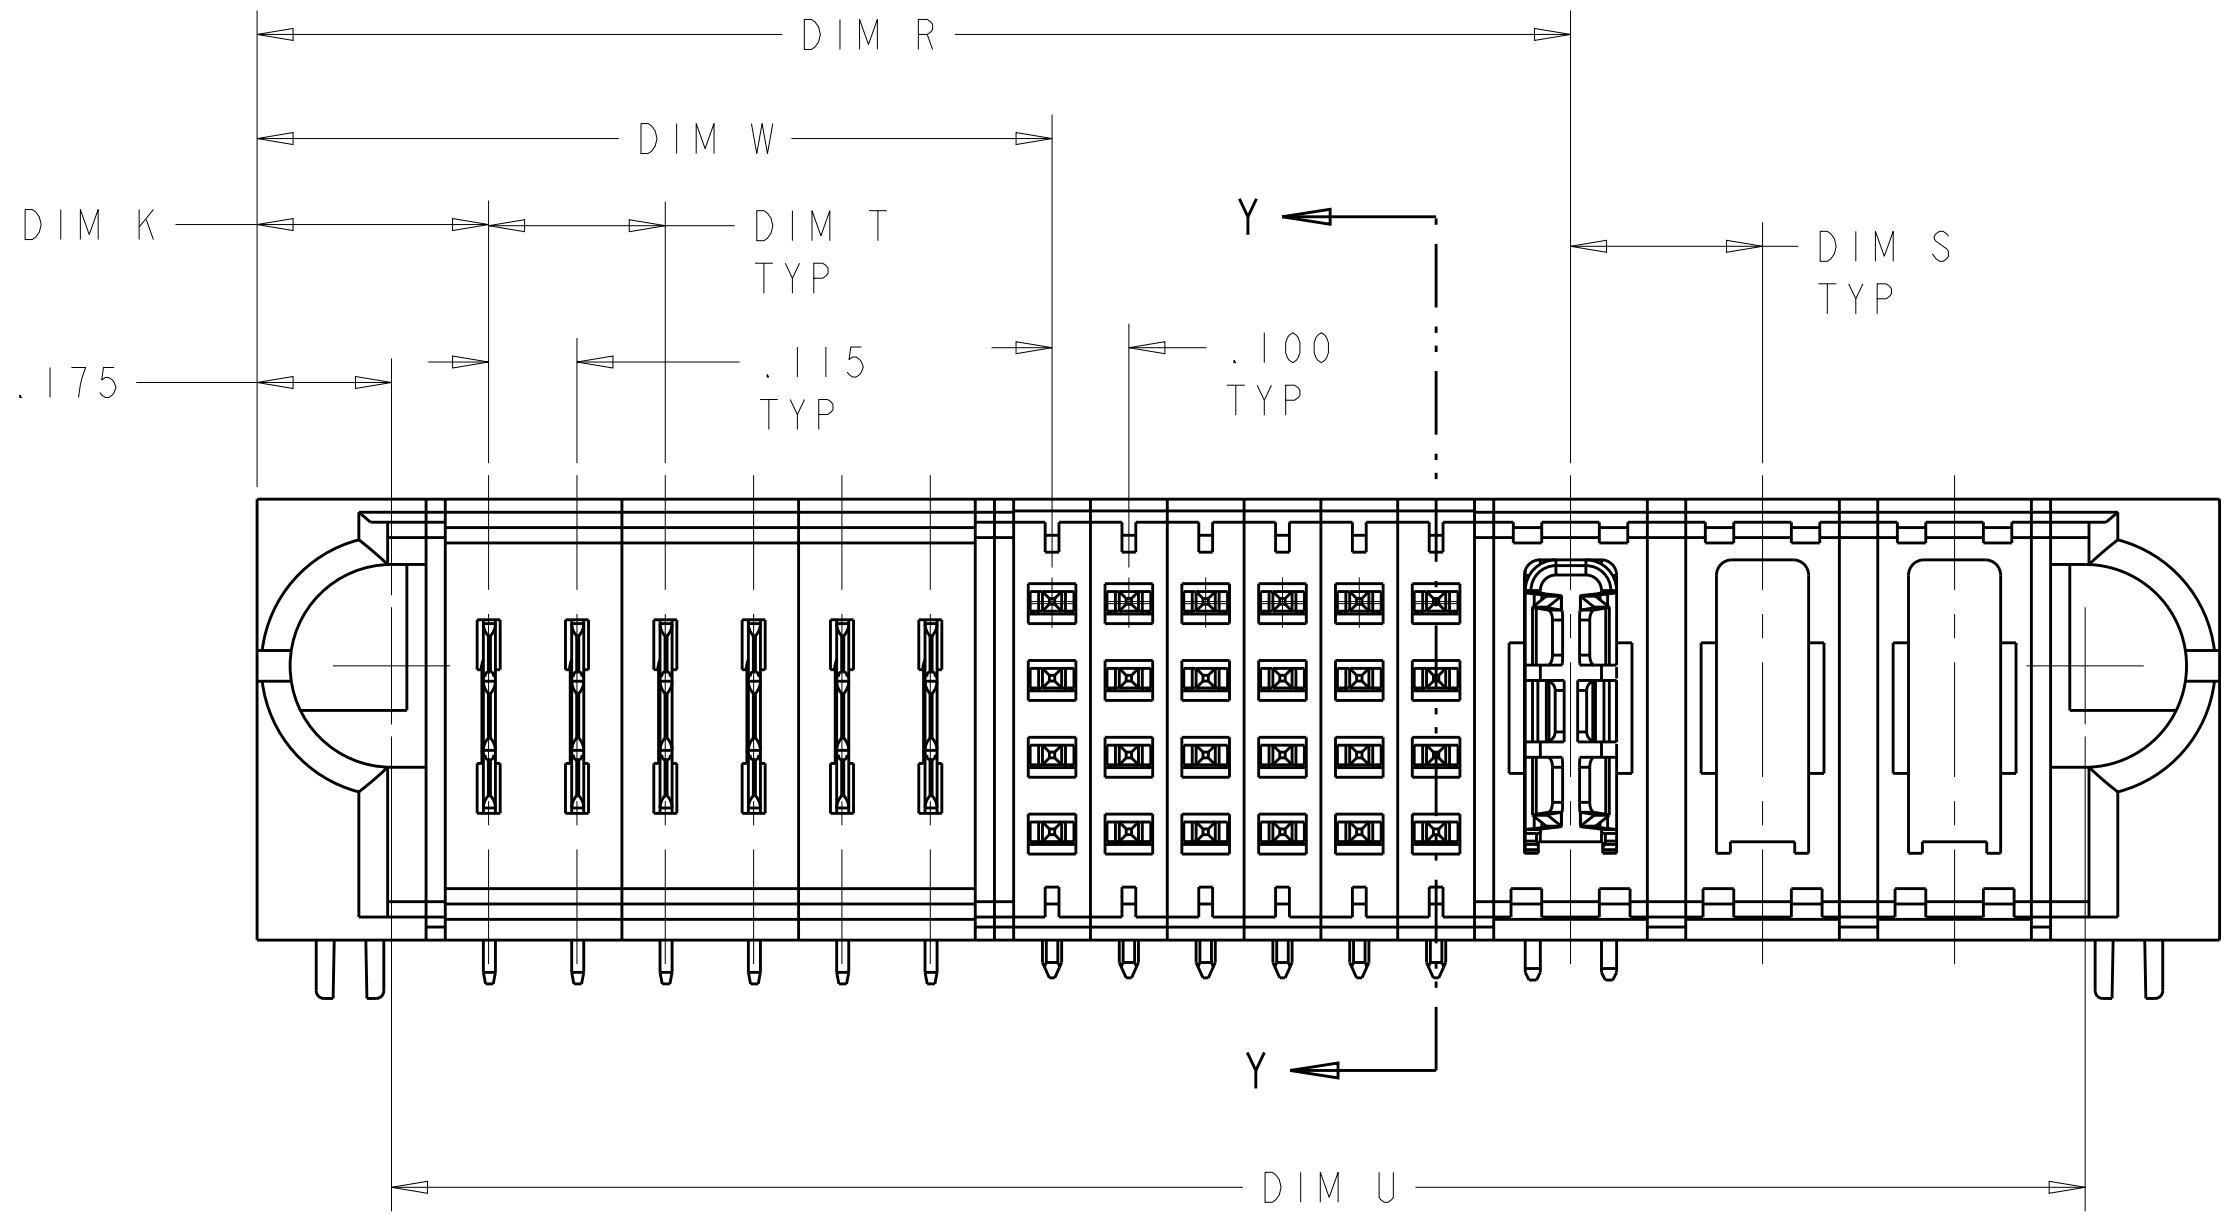
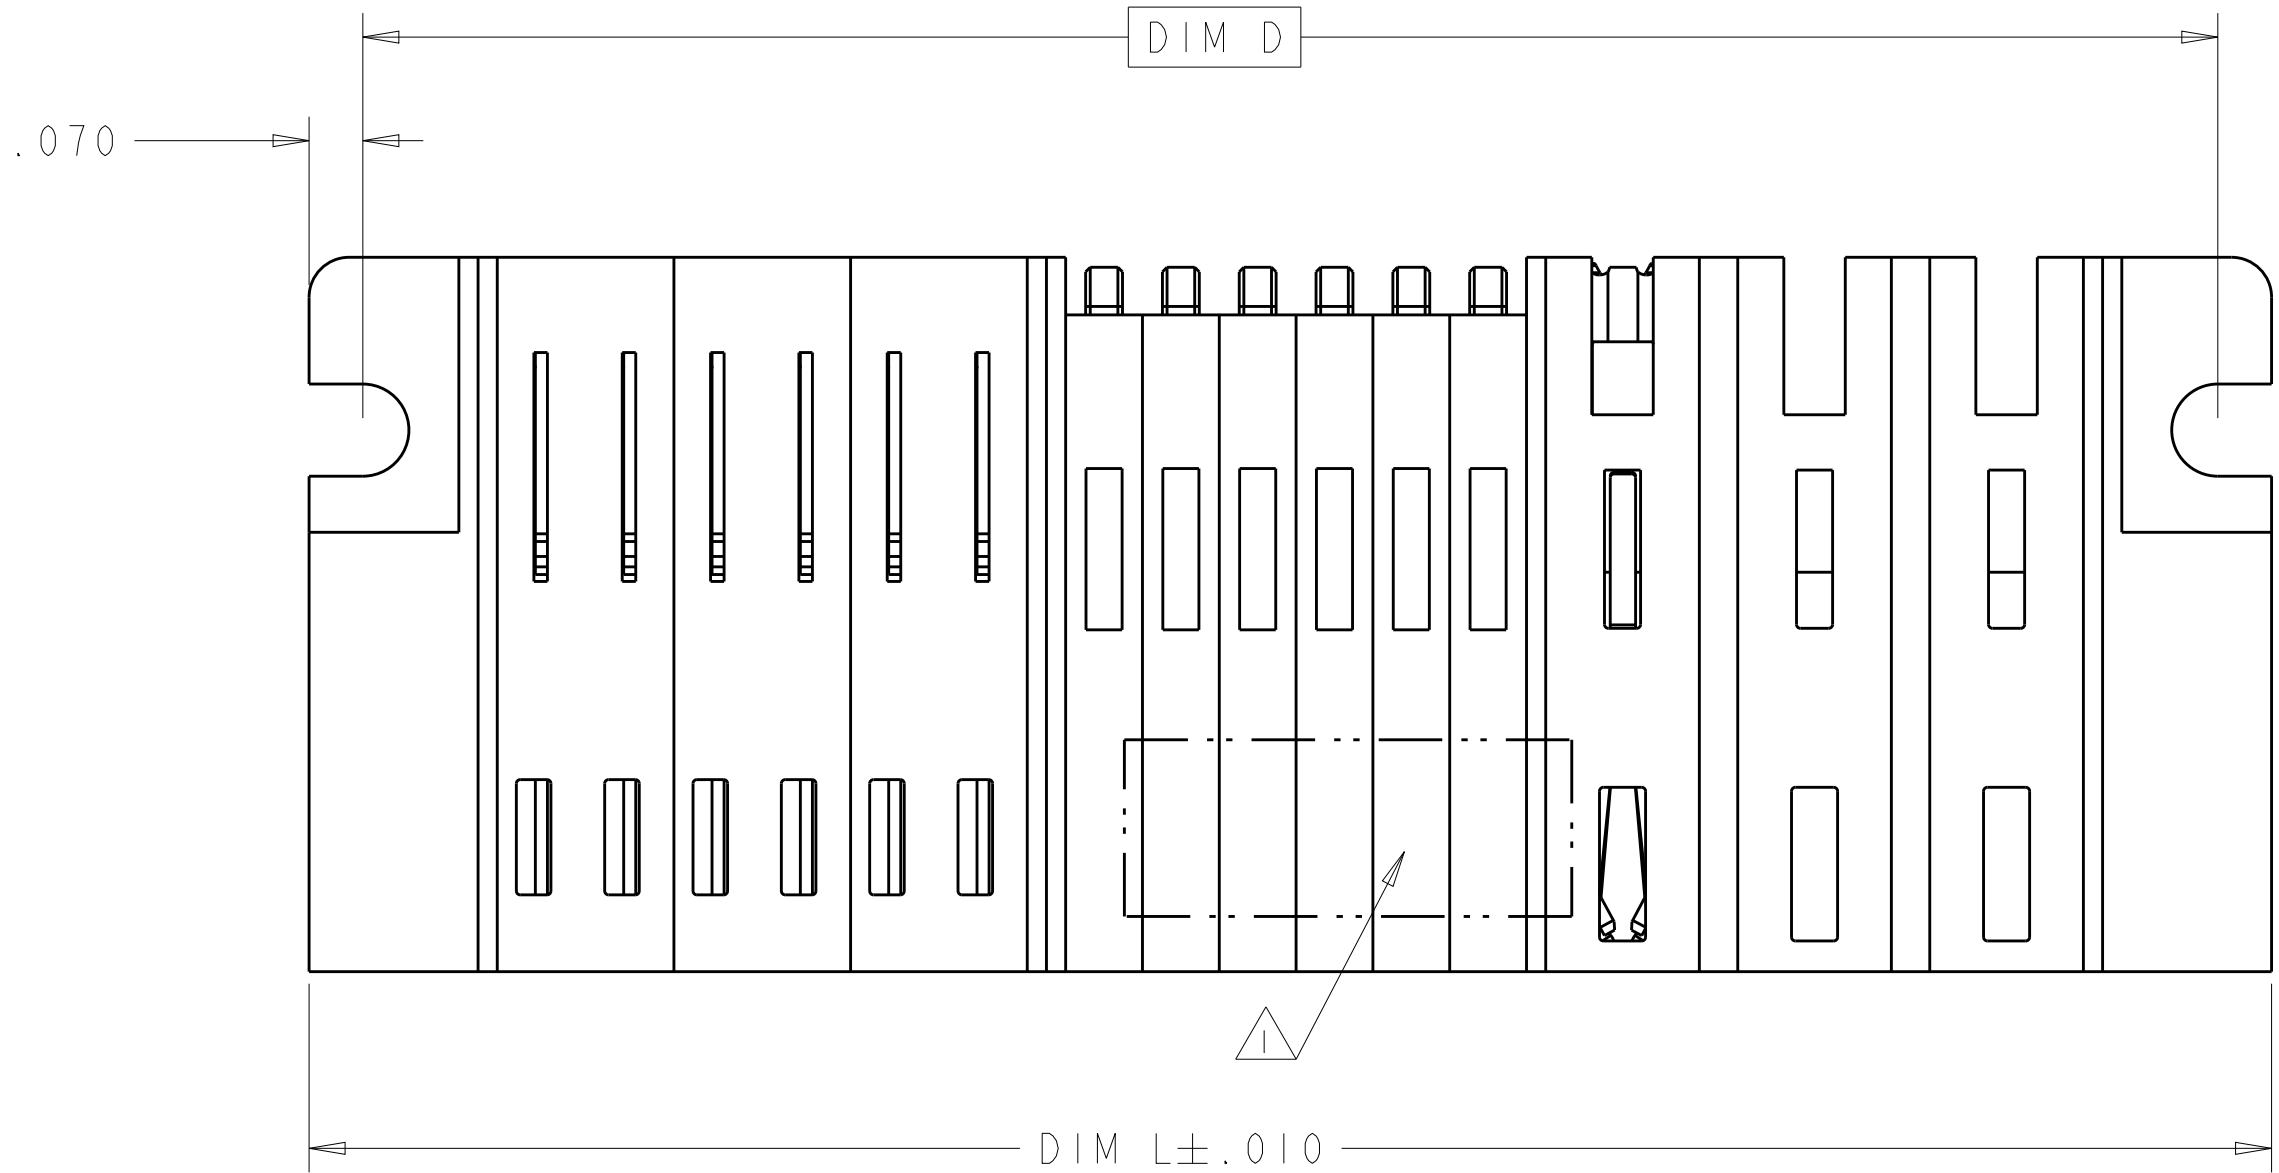


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			R9	REVISED 8-1	05NOV2014	CZ	SZ
			S	ADD NEW DASH NUMBER 8-2	07FEB2015	CZ	SZ
			S2	REVISED 8-2 CUSTOMER	09MAR2015	CZ	SZ

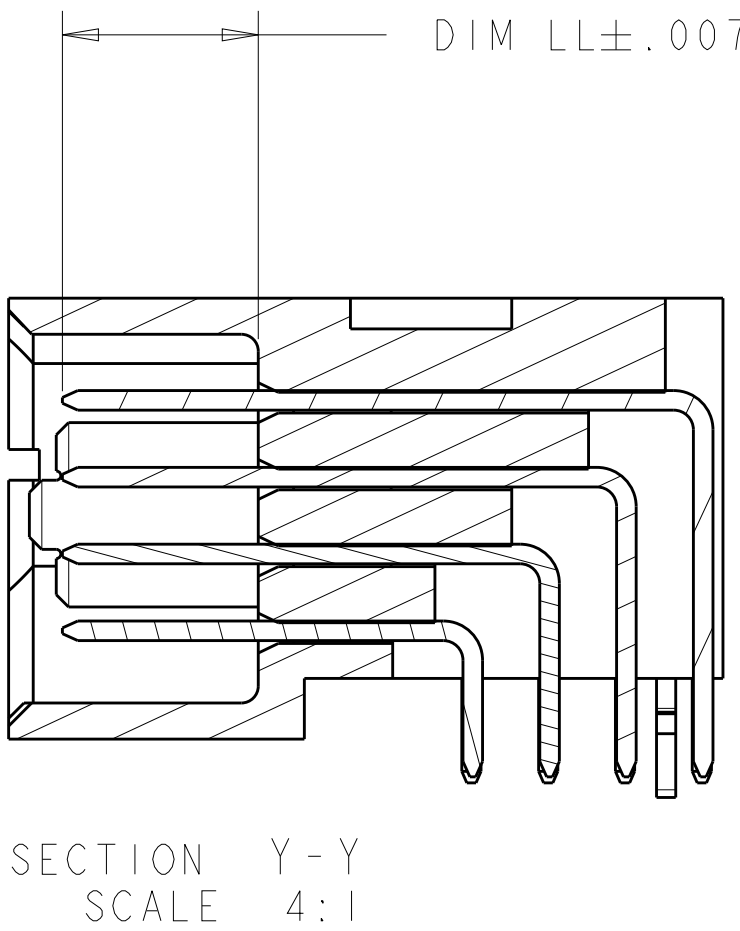

- 1 "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 2 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER AND SIGNAL CONTACTS
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 6 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 7 PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 ±.030 HOLE
- 8 VARIABLE DIMENSIONS SHOW ON TABLE OR PART VIEW
- 9 REFER TO PAGE 10 FOR DETAIL DIMENTIONS.

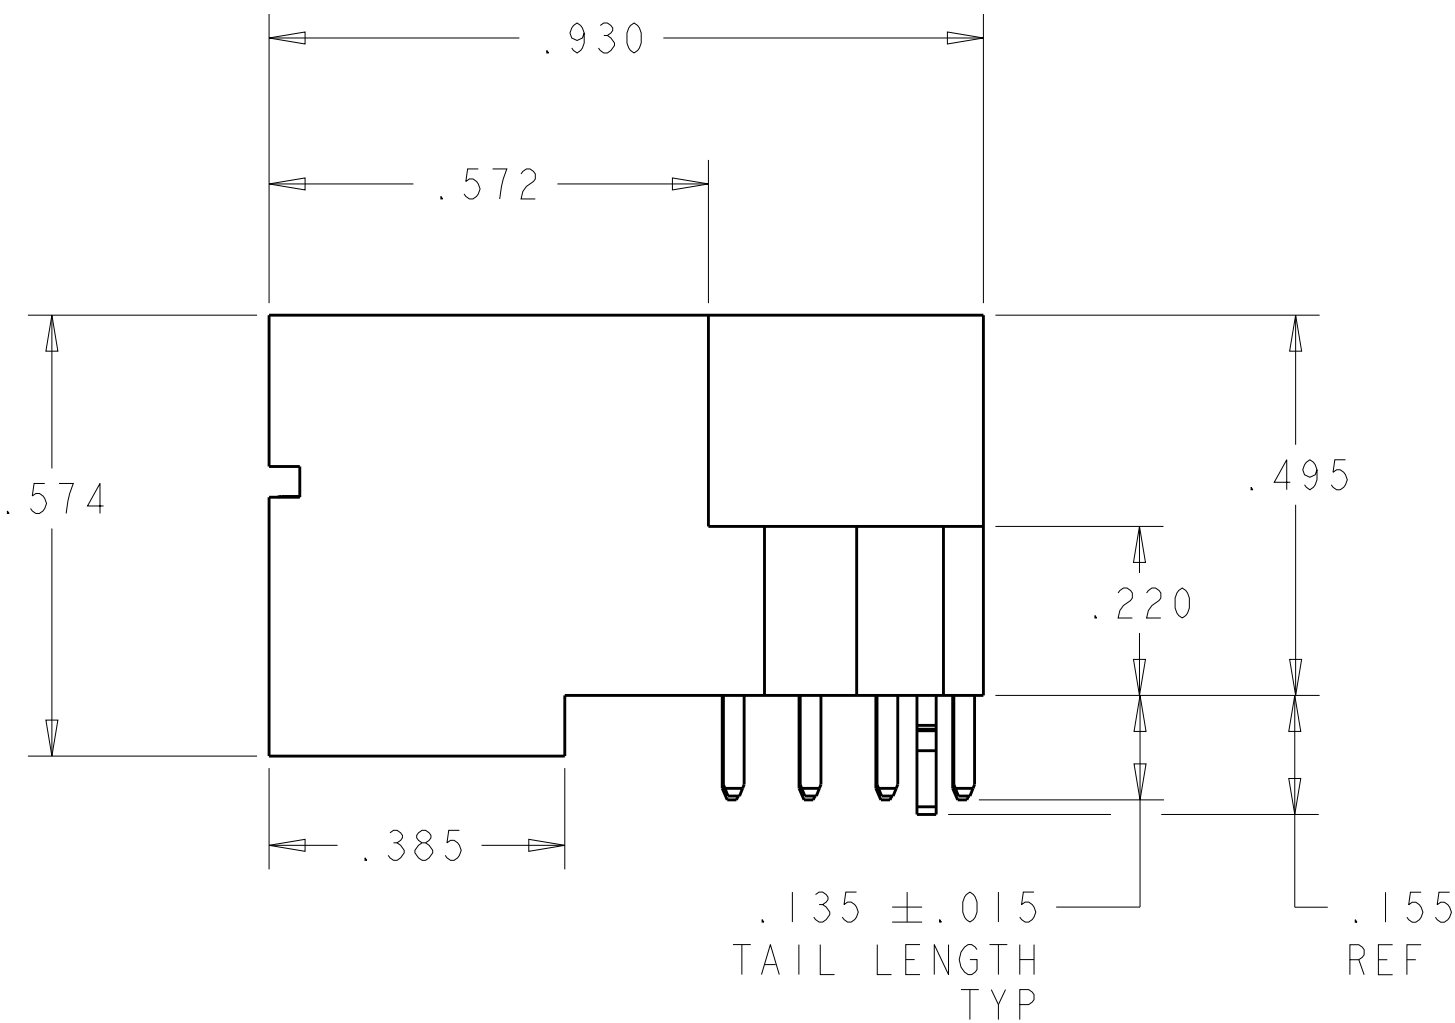

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO 10APR2007	 TE Connectivity	
DIMENSIONS: INCHES		CHK S. ZHAO 10APR2007		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S. ZHAO	NAME	
		PRODUCT SPEC	RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		APPLICATION SPEC	SIZE	
		114-13251	CAGE CODE	
MATERIAL : 2	FINISH : 3	DRAWING NO		RESTRICTED TO
		A100779C=6450830		
		CUSTOMER DRAWING		
		WEIGHT		
		SCALE		
		4:1		
		SHEET		
		1 of 42		
		REV S2		


LOC	DIST	REVISIONS						
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		-	-	SEE SHEET 1	-	-	-	

2.100	1.495	1.020	1.990	0.250	0.250	2.200	2.340	.3450	3P + 16S + 3P	7-6450830-3
1.000	.895	.570	.890	-	-	1.100	1.240	.345	1P + 8S + 1P	7-6450830-2
4.750	3.645	3.070	4.640	.250		4.850	4.990	.370	3ACP + 7P + 20S + 5P	7-6450830-1
3.850	3.4675	1.010	3.740	.230	.230	3.950	4.090	.2775	6LP + 96S + 4LP	7-6450830-0
3.850	3.4675	1.010	3.740	.230	.230	3.950	4.090	.2775	6LP + 96S + 4LP	6-6450830-9
2.420	2.0375	.780	2.310	.230	.230	2.520	2.660	.2775	4LP + 48S + 4LP	6-6450830-8
5.400	4.5575	1.700	5.290	.230	.230	5.500	5.640	.2775	12LP + 112S + 8LP	6-6450830-7
2.860	2.4775	1.820	2.750	.230	.300	2.960	3.100	.370	5ACP + 24S + 4LP	6-6450830-6
2.225	1.620	1.045	2.115	.250	.250	2.325	2.465	.345	3P + 20S + 3P	6-6450830-4
3.600	2.895	1.795	3.490	.300	.250	3.700	3.840	.345	6P + 40S + 3ACP	6-6450830-3
3.030		1.345 	2.920			3.130	3.270	.345 	5HDP + 24S + 1P + 7LP	6-6450830-2
1.135	.9825	.550	1.025	-	-	1.235	1.375	.2775	2LP + 16S + 2LP	6-6450830-0
3.200	3.120	2.370	3.090	-	.300	3.300	3.440	.320	7ACP + 24S + 1P	5-6450830-8
2.800	1.945	1.270	2.690	.250	.250	2.900	3.040	.345	4P + 24S + 4P	5-6450830-7
2.700	1.595	1.120	2.590	.250	.300	2.800	2.940	.345	3ACP + 16S + 5P	5-6450830-6
2.655	2.5025	2.145	2.545	.115		2.755	2.895	.345	3ACP+3P+12S+2LP	5-6450830-5
1.350	1.020	.745	1.240	.250	.250	1.450	1.590	.320	2P + 8S + 2P	5-6450830-4
2.450	1.595	1.120	2.340	.250	.300	2.550	2.690	.345	3ACP + 16S + 4P	5-6450830-3
2.350	1.670	1.095	2.240	.200	.200	2.450	2.590	.320	4HDP + 20S + 4HDP	5-6450830-2
1.300	1.145	.520	1.190	-	-	1.400	1.540	.345	1P + 24S + 1P	5-6450830-1
1.025	.7575	.550	.915	-	-	1.125	1.265	.2775	2LP + 8S + 3LP	5-6450830-0
2.300	1.6950	1.020	2.190	.250	.250	2.400	2.540	.3450	3P + 24S + 3P	4-6450830-9
2.995	2.190	1.415	2.885	.350	.280	3.095	3.235	.3025	8LP + 24S + 3P	4-6450830-8
1.280	.875	.575	1.170	.250	-	1.380	1.520	.3015	2LP + 8S + 2P	4-6450830-7
1.750	1.345	.845	1.640	.250	.250	1.850	1.990	.395	2P + 16S + 2P	4-6450830-6
2.300	1.6950	1.020	2.190	.250	.250	2.400	2.540	.3450	3P + 24S + 3P	4-6450830-5
1.600	1.245	.770	1.490	.250	.250	1.700	1.840	.3450	2P + 16S + 2P	4-6450830-4
6.100	2.195	1.845	5.990	.250	.375	6.200	6.340	.395	4P + 12S + 16P	4-6450830-3
2.500	1.645	1.270	2.390	.250	.250	2.600	2.740	.3450	4P + 12S + 4P	4-6450830-2
3.675	2.445	2.045	3.565	.375	.375	3.775	3.915	.3450	5ACP + 12S + 4ACP	3-6450830-8
1.190	-	1.060	1.080	-	.230	1.290	1.430	.3775	6LP + 8S	3-6450830-7
1.920	1.0775	.870	1.810	-	.300	2.020	2.160	.320	2ACP + 8S + 4LP	3-6450830-6
2.195	1.465	.865	2.085		.215	2.295	2.435	.2775	3LP + 20S + 4HDP	3-6450830-5
4.400	3.220	2.695	4.290		.300	4.500	4.640	.3700	8ACP + 16S + 4ACP	3-6450830-4
3.075	2.395	1.920	2.965		.300	3.175	3.3150	.3700	4ACP + 12S + 3P	3-6450830-3
3.075	2.395	1.920	2.965		.300	3.175	3.3150	.3700	4ACP + 12S + 3P	3-6450830-2
.935	.7825	.550	.825	-	-	1.035	1.175	.2775	2LP + 8S + 2LP	3-6450830-1
3.075	2.395	1.920	2.965		.300	3.175	3.3150	.3700	4ACP + 12S + 3P	3-6450830-0
2.160	1.7775	1.145	2.050	-	.300	2.260	2.400	.3450	3ACP + 24S+ 4LP	2-6450830-9
1.600	1.295	.720	1.490	.200	.200	1.700	1.840	.3450	2P + 20S + 2P	2-6450830-8
1.500	1.195	.720	1.390	.200	.200	1.600	1.740	.3450	2P + 16S + 2P	2-6450830-7
1.475	1.320	.595	1.365	-	-	1.575	1.715	.3700	1P + 24S + 1P	2-6450830-6
2.100	1.795	.720	1.990	.200	.200	2.200	2.340	.3450	2P + 40S + 2P	2-6450830-4
2.750	2.0450	1.270	2.640	.300	.250	2.850	2.990	.3450	4P + 28S + 3ACP	1-6450830-9
2.460	1.8575	.625	2.350	-	-	2.560	2.700	.1700	1P+2LP+48S+2LP+1P	1-6450830-7
-	-	-	-	-	-	-	-	-	4P+16S+24S+2HDP	1-6450830-8
2.750	2.0450	1.270	2.640	.300	.250	2.850	2.990	.3450	4P + 28S + 3ACP	1-6450830-5
1.800	1.4450	.770	1.690	.250	.250	1.900	2.040	.3450	2P + 24S + 2P	1-6450830-4
2.375	1.520	.845	2.265	.250	.300	2.475	2.615	.3450	2ACP + 24S + 4P	1-6450830-3
3.000	2.5025	1.945	2.890	.230		3.000	3.240	.3200	8HDP + 20S + 5LP	1-6450830-2
3.615	1.6850	1.010	3.505		.230	3.715	3.855	.2775	6LP + 24S + 10P	1-6450830-0
2.300	1.6950	1.020	2.190	.250	.250	2.400	2.540	.3450	3P + 24S + 3P	6450830-9
2.480	2.3275	1.520	2.370	-	.250	2.580	2.720	.3450	5P + 32S + 2LP	6450830-8
3.400	2.2950	1.570	3.290	.250	.250	3.500	3.640	.3450	5P + 24S + 5P	6450830-7
1.800	1.4450	.770	1.690	.250	.250	1.900	2.040	.3450	2P + 24S + 2P	6450830-5
1.780	1.6025	.770	1.670	-	.250	1.880	2.020	.3450	2P + 32S + 2LP	6450830-4
2.310	1.6725	1.240	2.200	.230	.230	2.410	2.550	.3025	8LP + 16S + 6LP	6450830-3
2.315	1.7100	1.035	2.205	.250	.230	2.415	2.555	.3025	6LP + 24S + 3P	6450830-2
.935	.7825	.550	.825	-	-	1.035	1.175	.2775	2LP + 8S + 2LP	6450830-1
DIM V	DIM R	DIM W	DIM U	DIM S	DIM T	DIM D	DIM L	DIM K	DESCRIPTION	PART NUMBER

4.350	2.405	1.380	4.240			4.450	4.590	.2775	9LP + 36S + 1P + 16LP	8-6450830-2
4.500	2.170	.795	4.390			4.600	4.740	.345	2P + 48S + 10P	8-6450830-1
2.250	1.645	1.170	2.140	.250	.300	2.300	2.490	.370	3ACP + 16S + 3P	8-6450830-0
4.300	2.695	2.020	4.190	.250	.250	4.400	4.540	.345	7P + 24S + 7P	7-6450830-9
4.180	3.325	1.700	4.070	.250	.230	4.280	4.420	.2775	12LP + 60S + 4P	7-6450830-8
2.650	2.545	1.270	2.540	-	.250	2.750	2.890	.345	4P + 48S + 1P	7-6450830-7
1.750	1.3675	1.060	1.755	.230	.230	1.850	1.990	.2775	3LP + 12S + 4LP	7-6450830-6
DIM V	DIM R	DIM W	DIM U	DIM S	DIM T	DIM D	DIM L	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES



MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±
±.01
±.005
±.0020
#P

DWN
S. ZHAO
CHK
S. ZHAO
APVD
S. ZHAO

10APR2007
10APR2007
-

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251

WEIGHT
-

CUSTOMER DRAWING

NAME
S. ZHAO

RIGHT ANGLE WITH SHORT GUIDES
AND LP CONTACTS ASSEMBLY
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450830

RESTRICTED TO
-

SCALE
4:1


SHEET
2

OF
42


REV
S2

4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

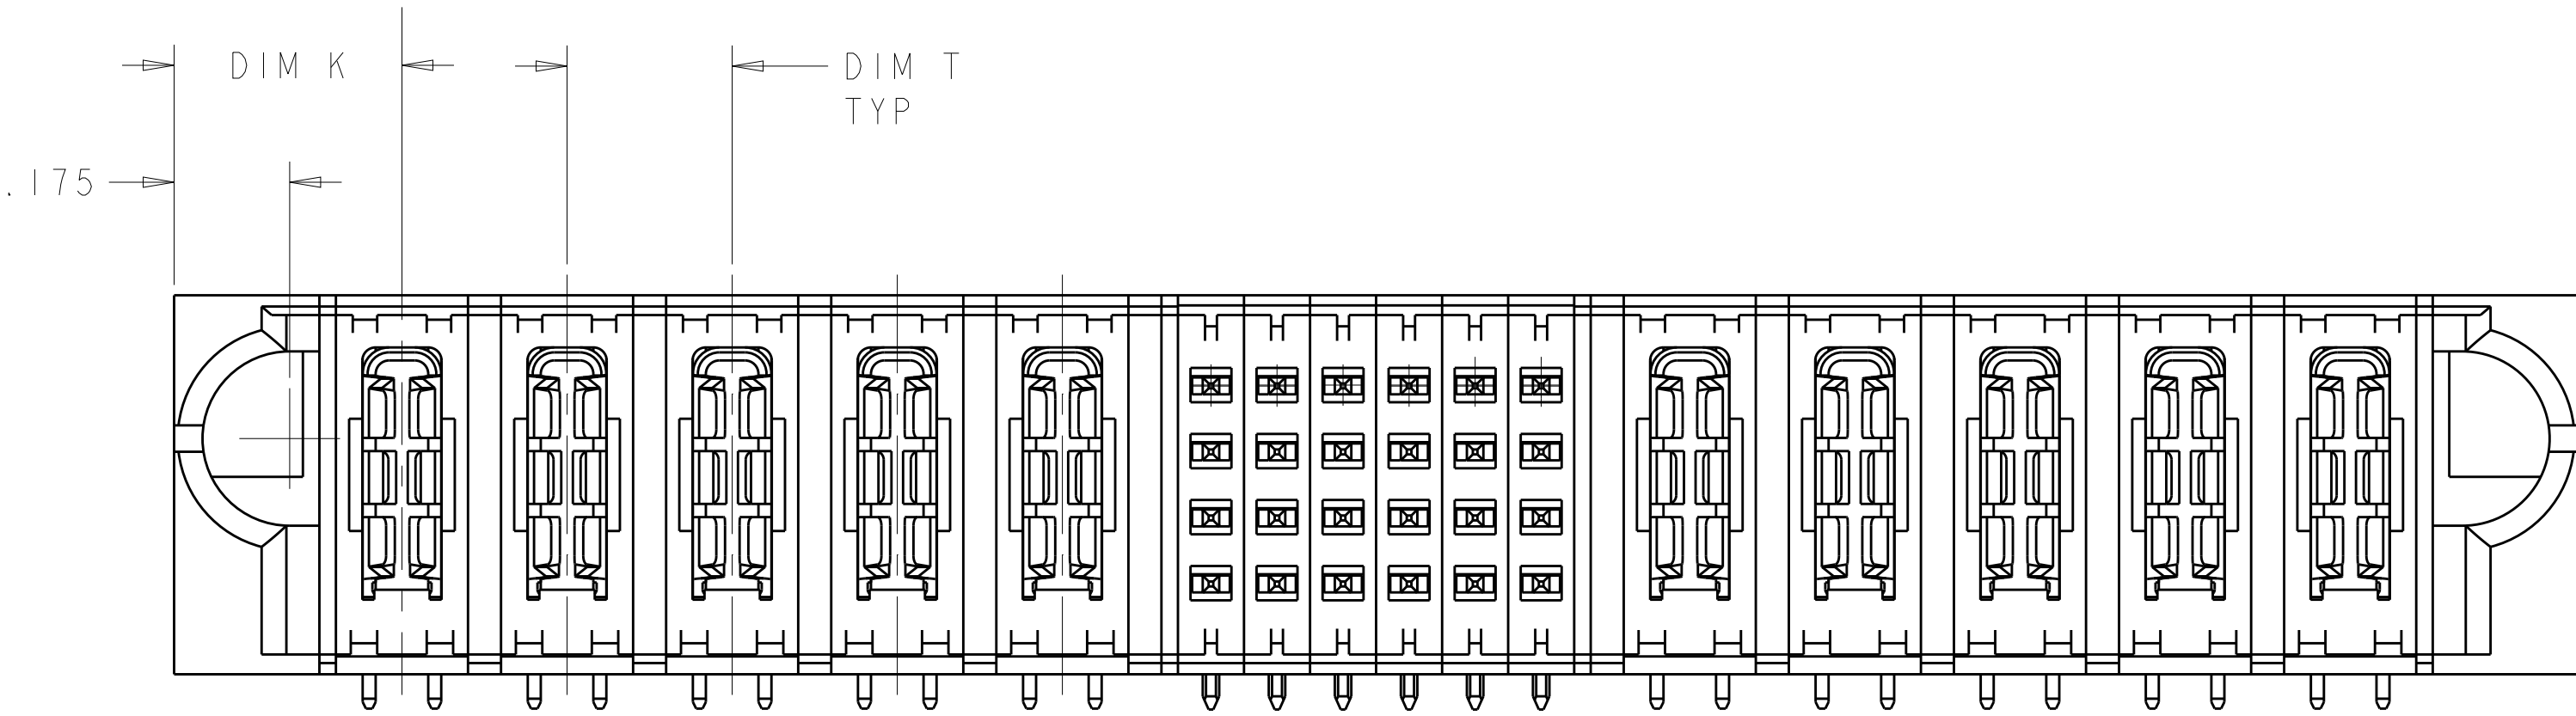


FOR "P+S+P"CONFIGURATION
UNSPECIFY DIMENSIONS PLEASE REFER TO PAGE 1

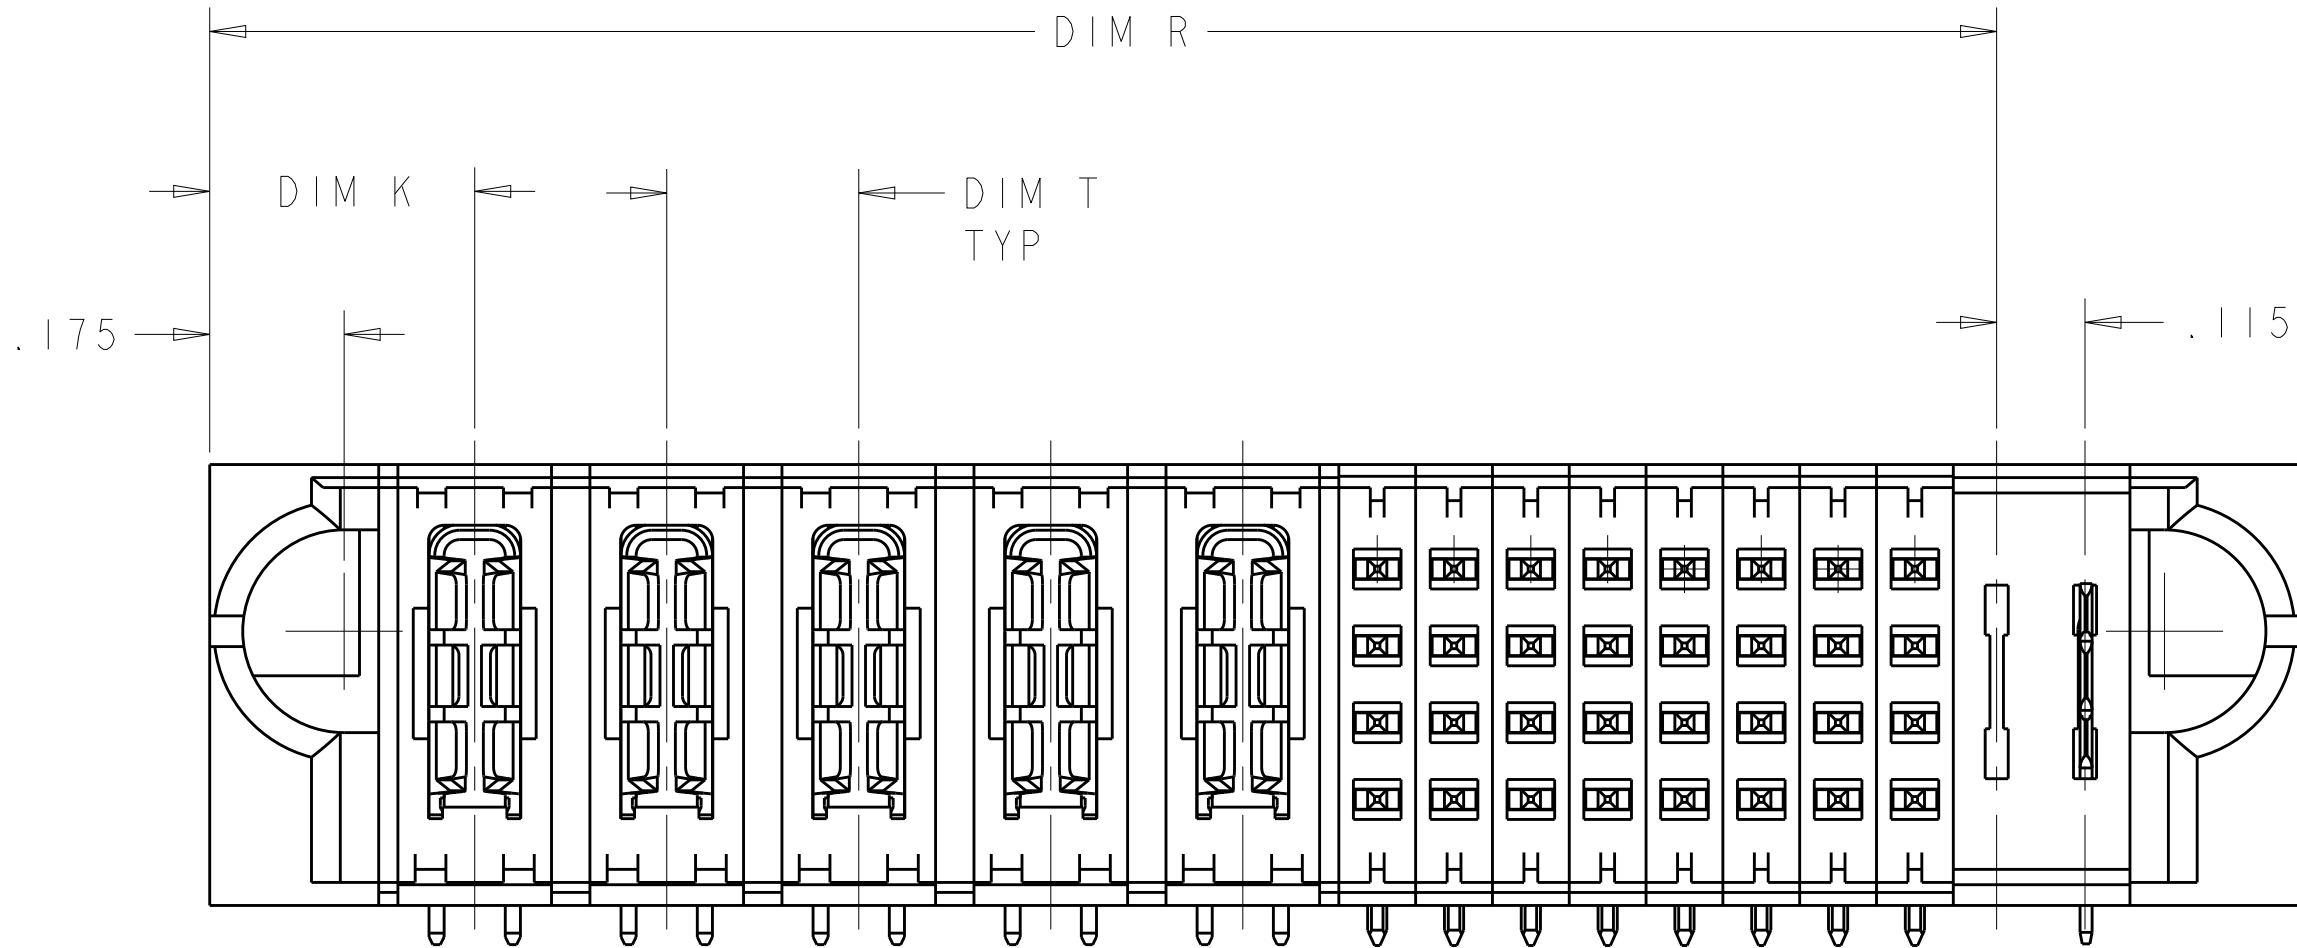

FOR "P+S+LP"CONFIGURATION
UNSPECIFY DIMENSIONS PLEASE REFER TO PAGE 1



HOLD DOWN	HD
.135 SIGNAL CON, ROW D,MFBL LL=.304	FJ
.135 SIGNAL CON, ROW C,MFBL LL=.304	FK
.135 SIGNAL CON, ROW B,MFBL LL=.304	FN
.135 SIGNAL CON, ROW A,MFBL LL=.304	FS
.135 SIGNAL CON, ROW D,MLBF LL=.204	E
.135 SIGNAL CON, ROW C,MLBF LL=.204	F
.135 SIGNAL CON, ROW B,MLBF LL=.204	G
.135 SIGNAL CON, ROW A,MLBF LL=.204	H
.135 SIGNAL CON, ROW D,STANDARD LL=.254	J
.135 SIGNAL CON, ROW C,STANDARD LL=.254	K
.135 SIGNAL CON, ROW B,STANDARD LL=.254	N
.135 SIGNAL CON, ROW A,STANDARD LL=.254	S
.135 STANDARD POWER CON,3 BEAMS	TM
.135 SOLDER LOWER POWER,MFBL	LMF
.135 SOLDER LOWER POWER,STD	LM
.135 SOLDER LOWER POWER,MLBF	LML
DESCRIPTION	IDENTIFIER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.ZHAO	10APR2007	 TE Connectivity		
		CHK S.ZHAO	10APR2007			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	SIZE A100779C=6450830	RESTRICTED TO -
		0 PLC ±.01				
		1 PLC ±.01				
		2 PLC ±.01				
		3 PLC ±.005				
		4 PLC ±.0020				
		ANGLES ±2°				
MATERIAL	FINISH	CUSTOMER DRAWING		SCALE	SHEET	REV
-	-	114-13251		4:1	3 OF 42	S2
		WEIGHT				

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER		SIGNAL		POWER			
			P1	P2	1	2	P3	P4		
6450830-1	D C B A			LM	LM	J	J	LM	LM	
						K	K			
						N	N			
						S	S			
2LP + 8S + 2LP										

PART NUMBER	ROWS		POWER						SIGNAL						POWER				
			LP1	LP2	LP3	LP4	LP5	LP6	1	2	3	4	5	6	P1	P2	P3		
6450830-2	D C B A			LM	LM	LM	LM	LM	LM	J	J	J	J	J	J	TM	TM	TM	
										K	K	K	K	K	K				
										N	N	G	N	N	N				
										S	S	S	S	S	S				
6LP + 24S + 3P																			

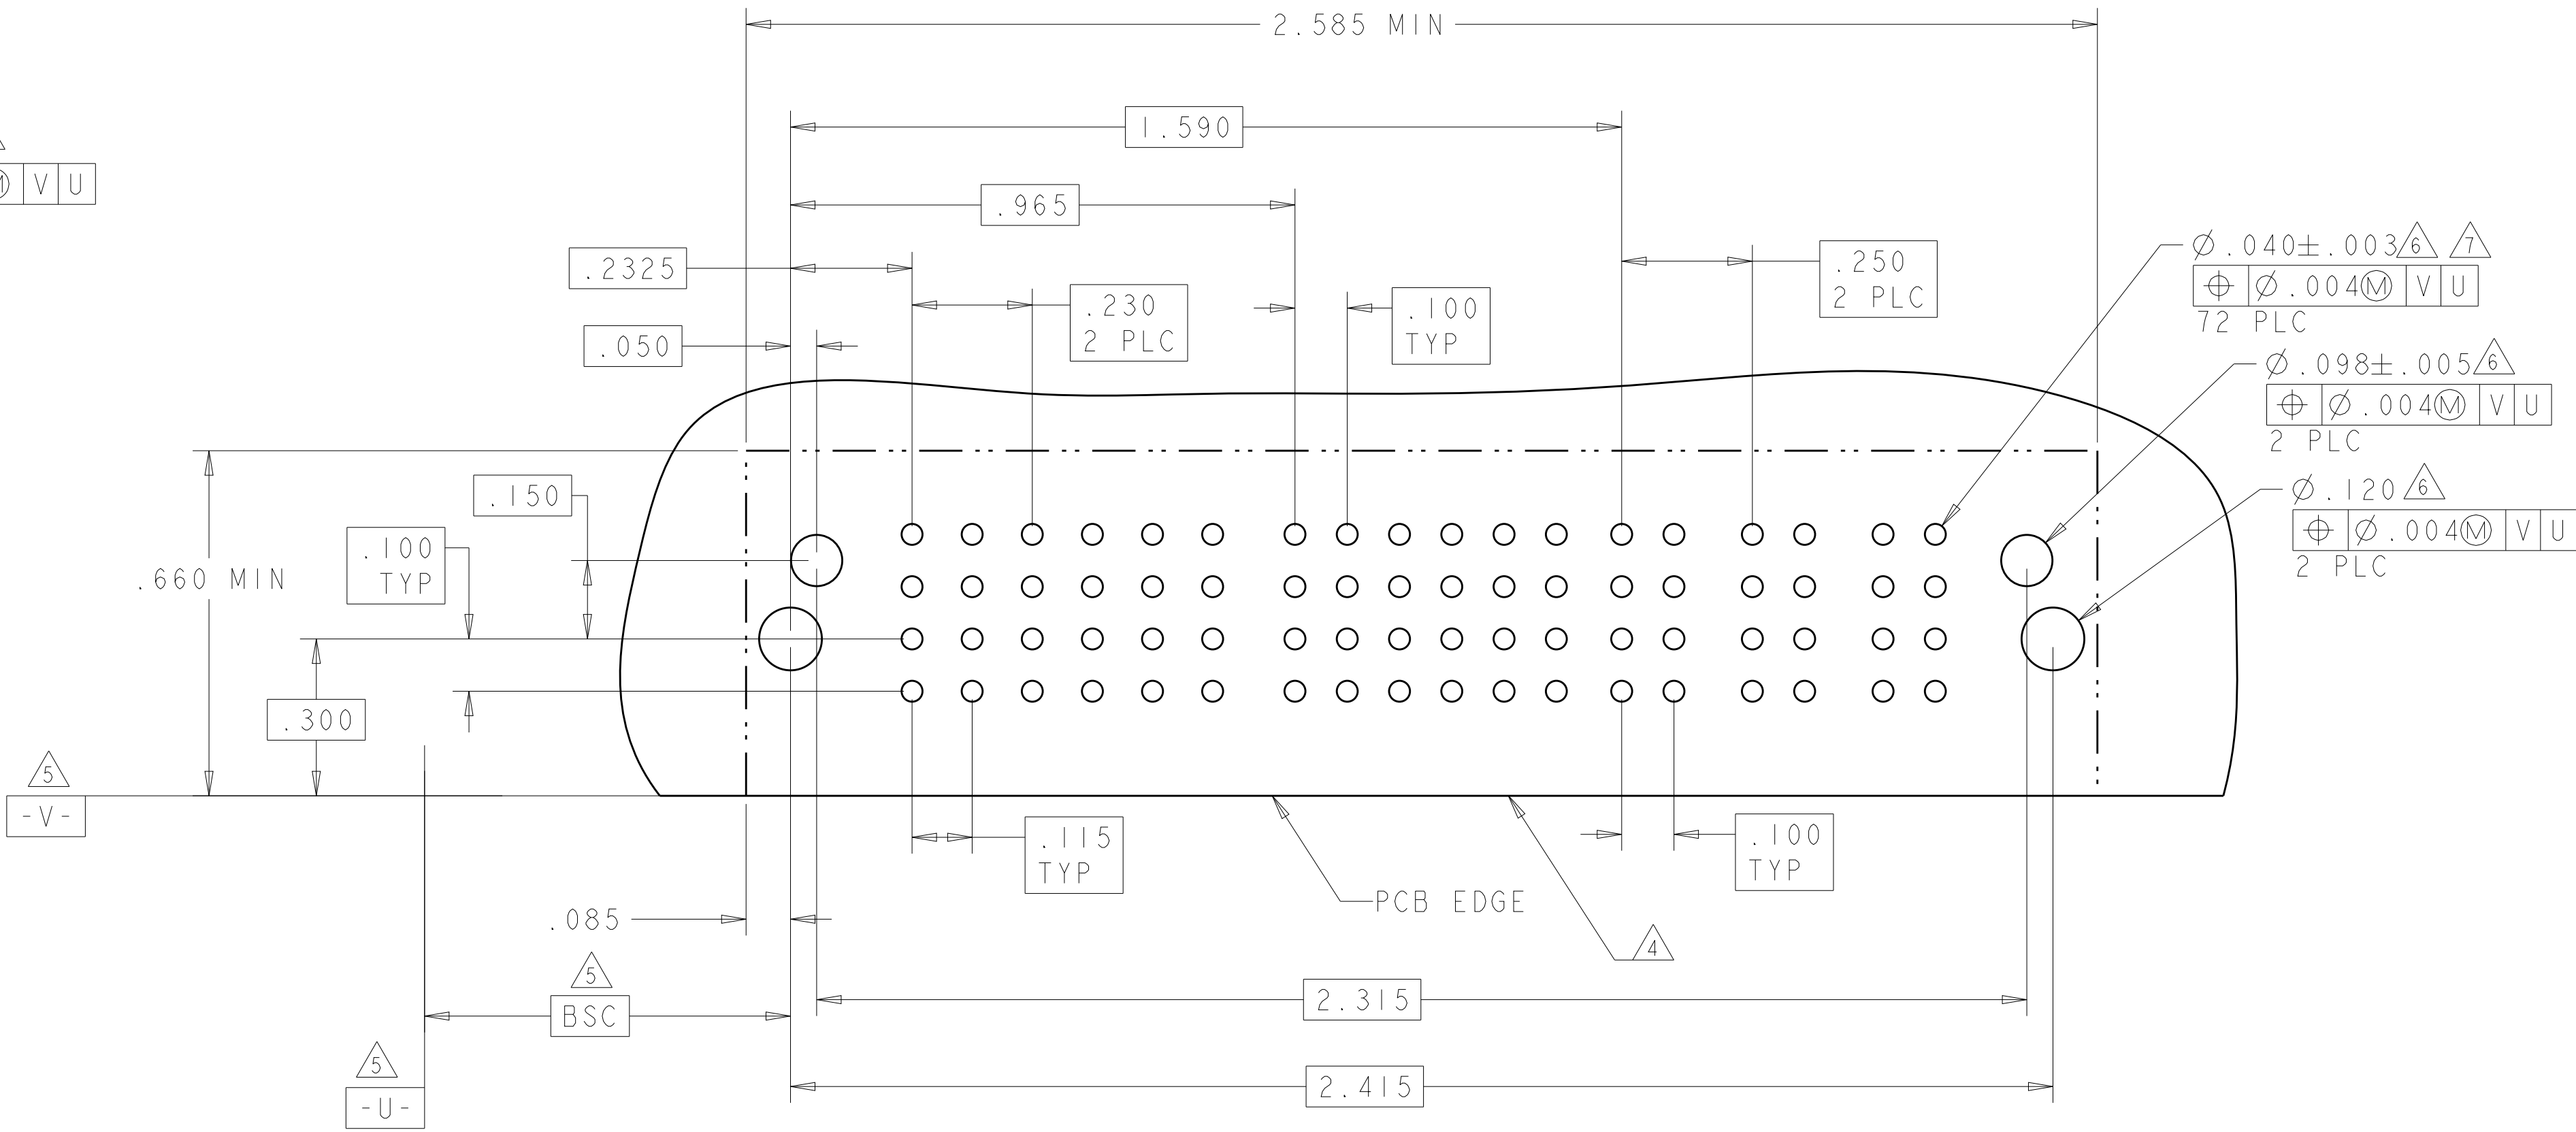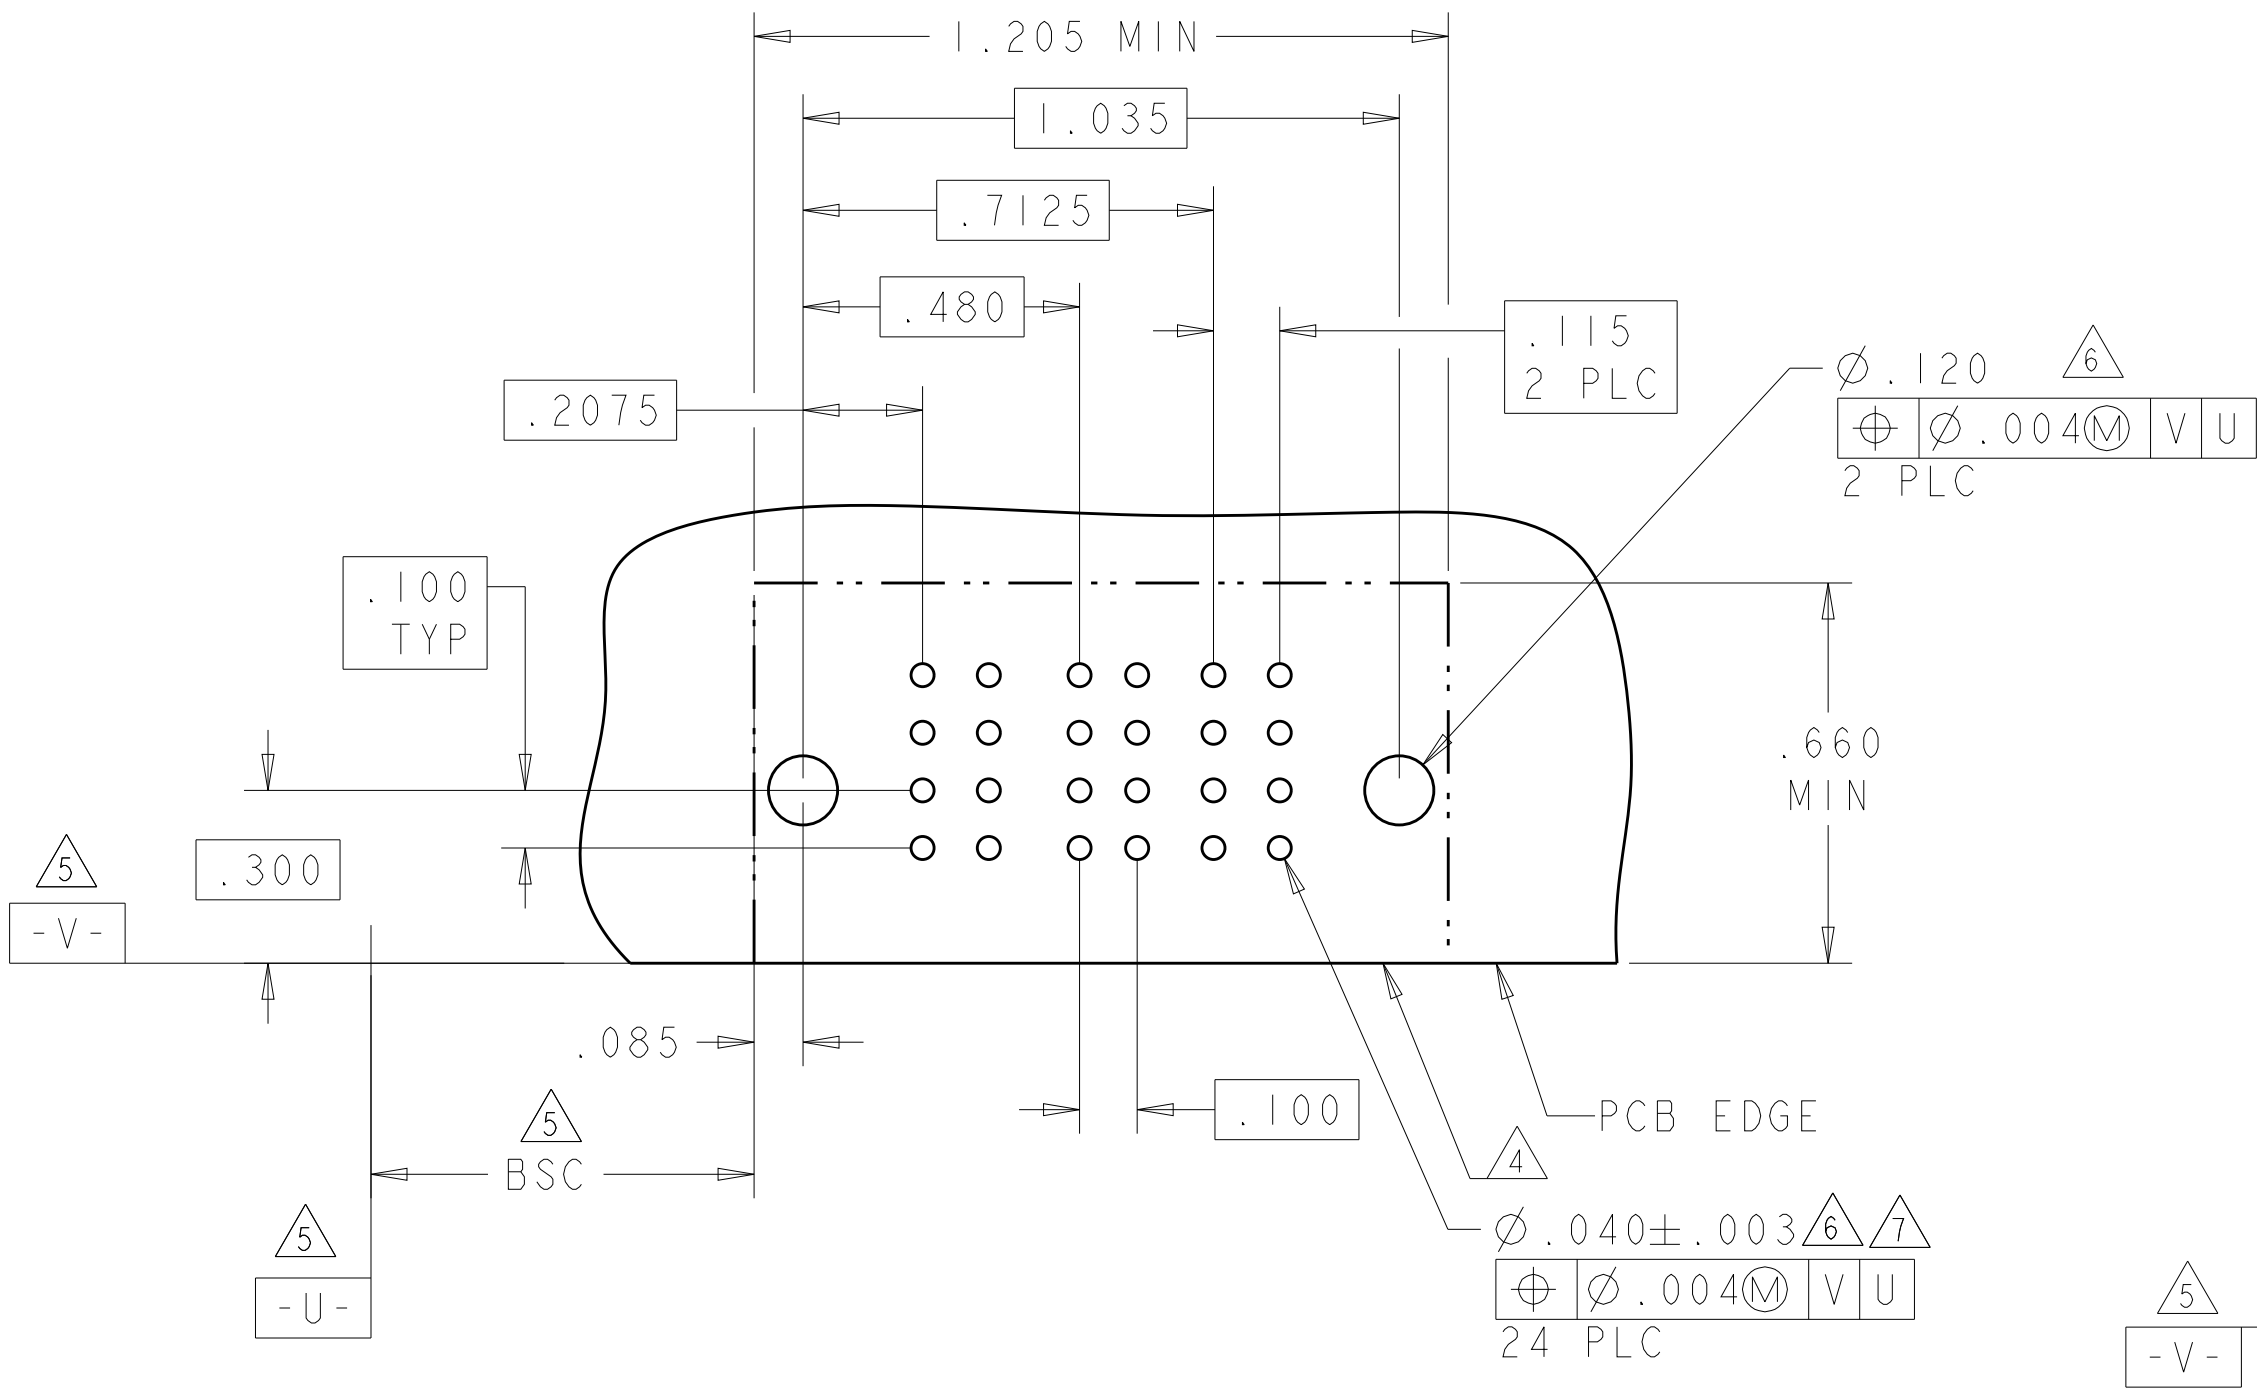

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
S.ZHAO
CHK
S.ZHAO
APVD
S.ZHAO

10APR2007
10APR2007
-

DIMENSIONS:
INCHES

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.01
4 PLC ±.01
ANGLES ±.0020
FINISH #2°

MATERIAL
-

WEIGHT
-

CUSTOMER DRAWING

DWN
S.ZHAO
CHK
S.ZHAO
APVD
S.ZHAO

10APR2007
10APR2007
-

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251

WEIGHT
-

CUSTOMER DRAWING

NAME
RIGHT ANGLE WITH SHORT GUIDES
AND LP CONTACTS ASSEMBLY
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
100779

DRAWING NO
C=6450830

RESTRICTED TO
-

SCALE
4:1


SHEET
4

OF
42


REV
S2

LOC		DIST		REVISONS				
ES	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		-		SEE SHEET 1		-	-	-

PART NUMBER	ROWS		POWER								SIGNAL				POWER						
			LP1	LP2	LP3	LP4	LP5	LP6	LP7	LP8	1	2	3	4	LP9	LP10	LP11	LP12	LP13	LP14	
6450830-3	D C B A										J	J	J	J							
											K	K	K	K							
											N	N	N	N							
											S	S	S	S							
8LP + 16S + 6LP																					

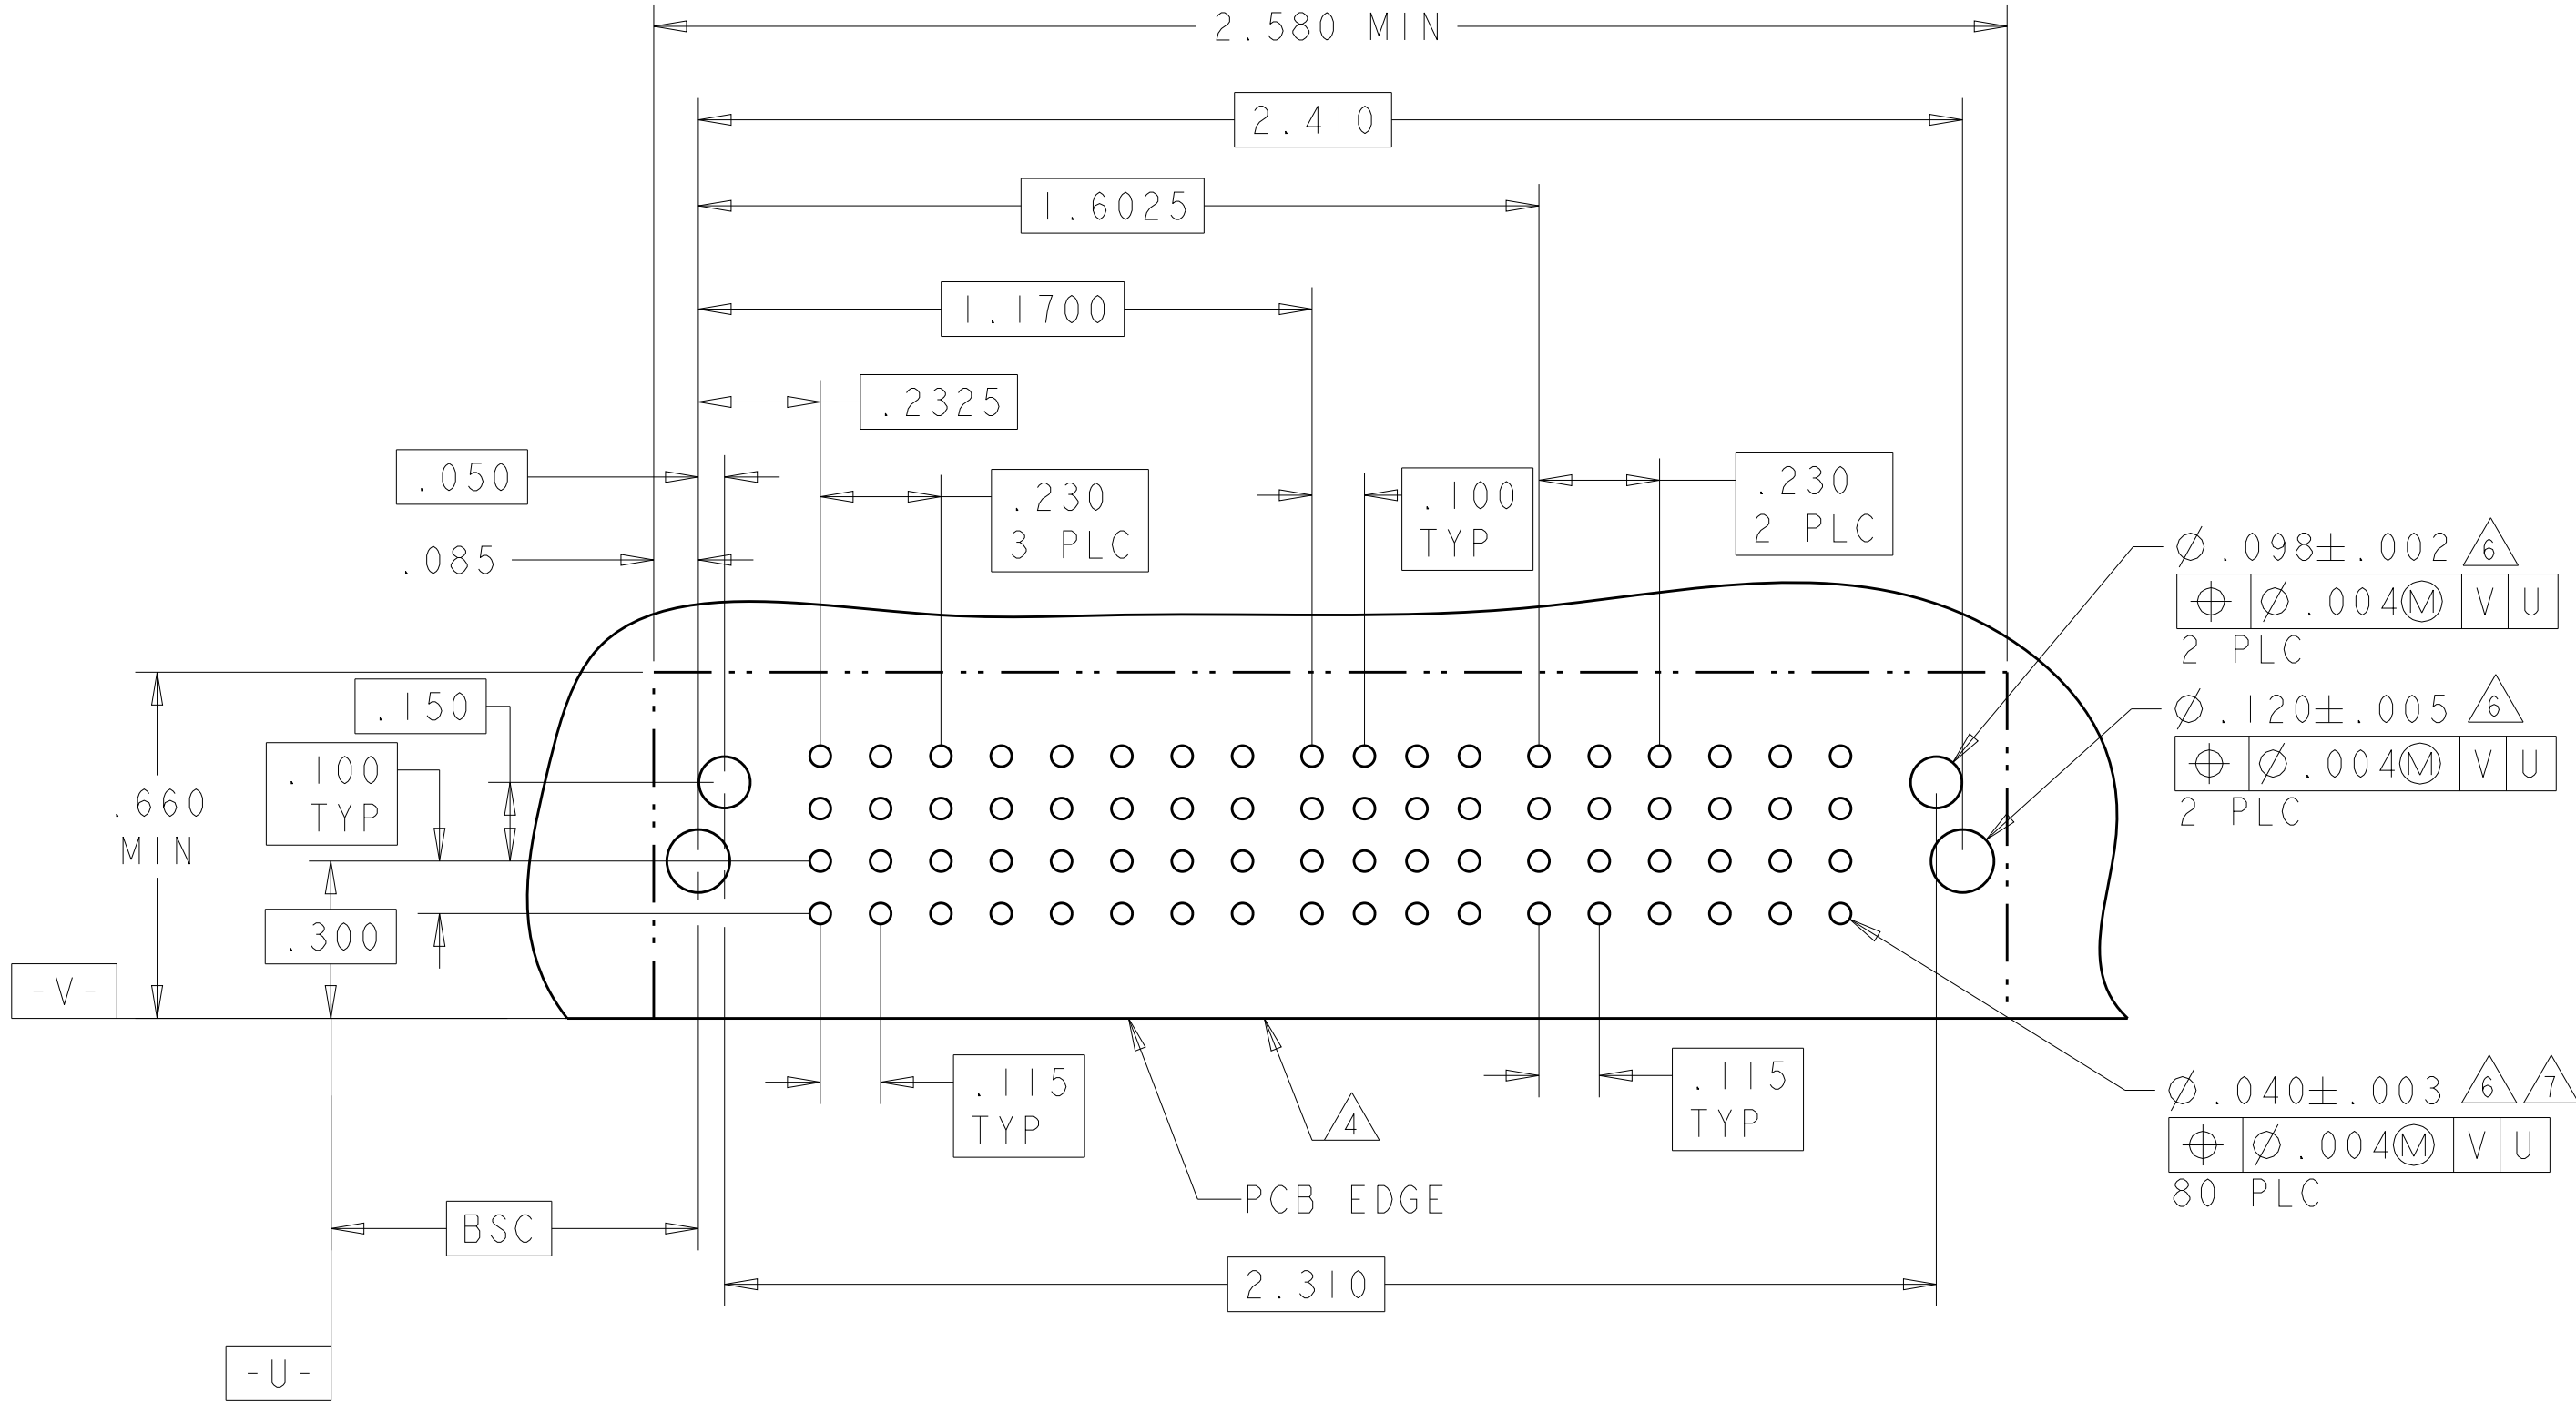

PART NUMBER	ROWS		POWER		SIGNAL								POWER		
			P1	P2	1	2	3	4	5	6	7	8	LPI	LP2	
6450830-4	D C B A	 HD	TM	TM	J	J	J	J	J	J	J	J	LM	LM	 HD
					K	K	K	K	K	K	K	K			
					N	N	N	N	N	N	N	N			
					S	S	S	S	S	S	S	S			
2P + 32S + 2LP															

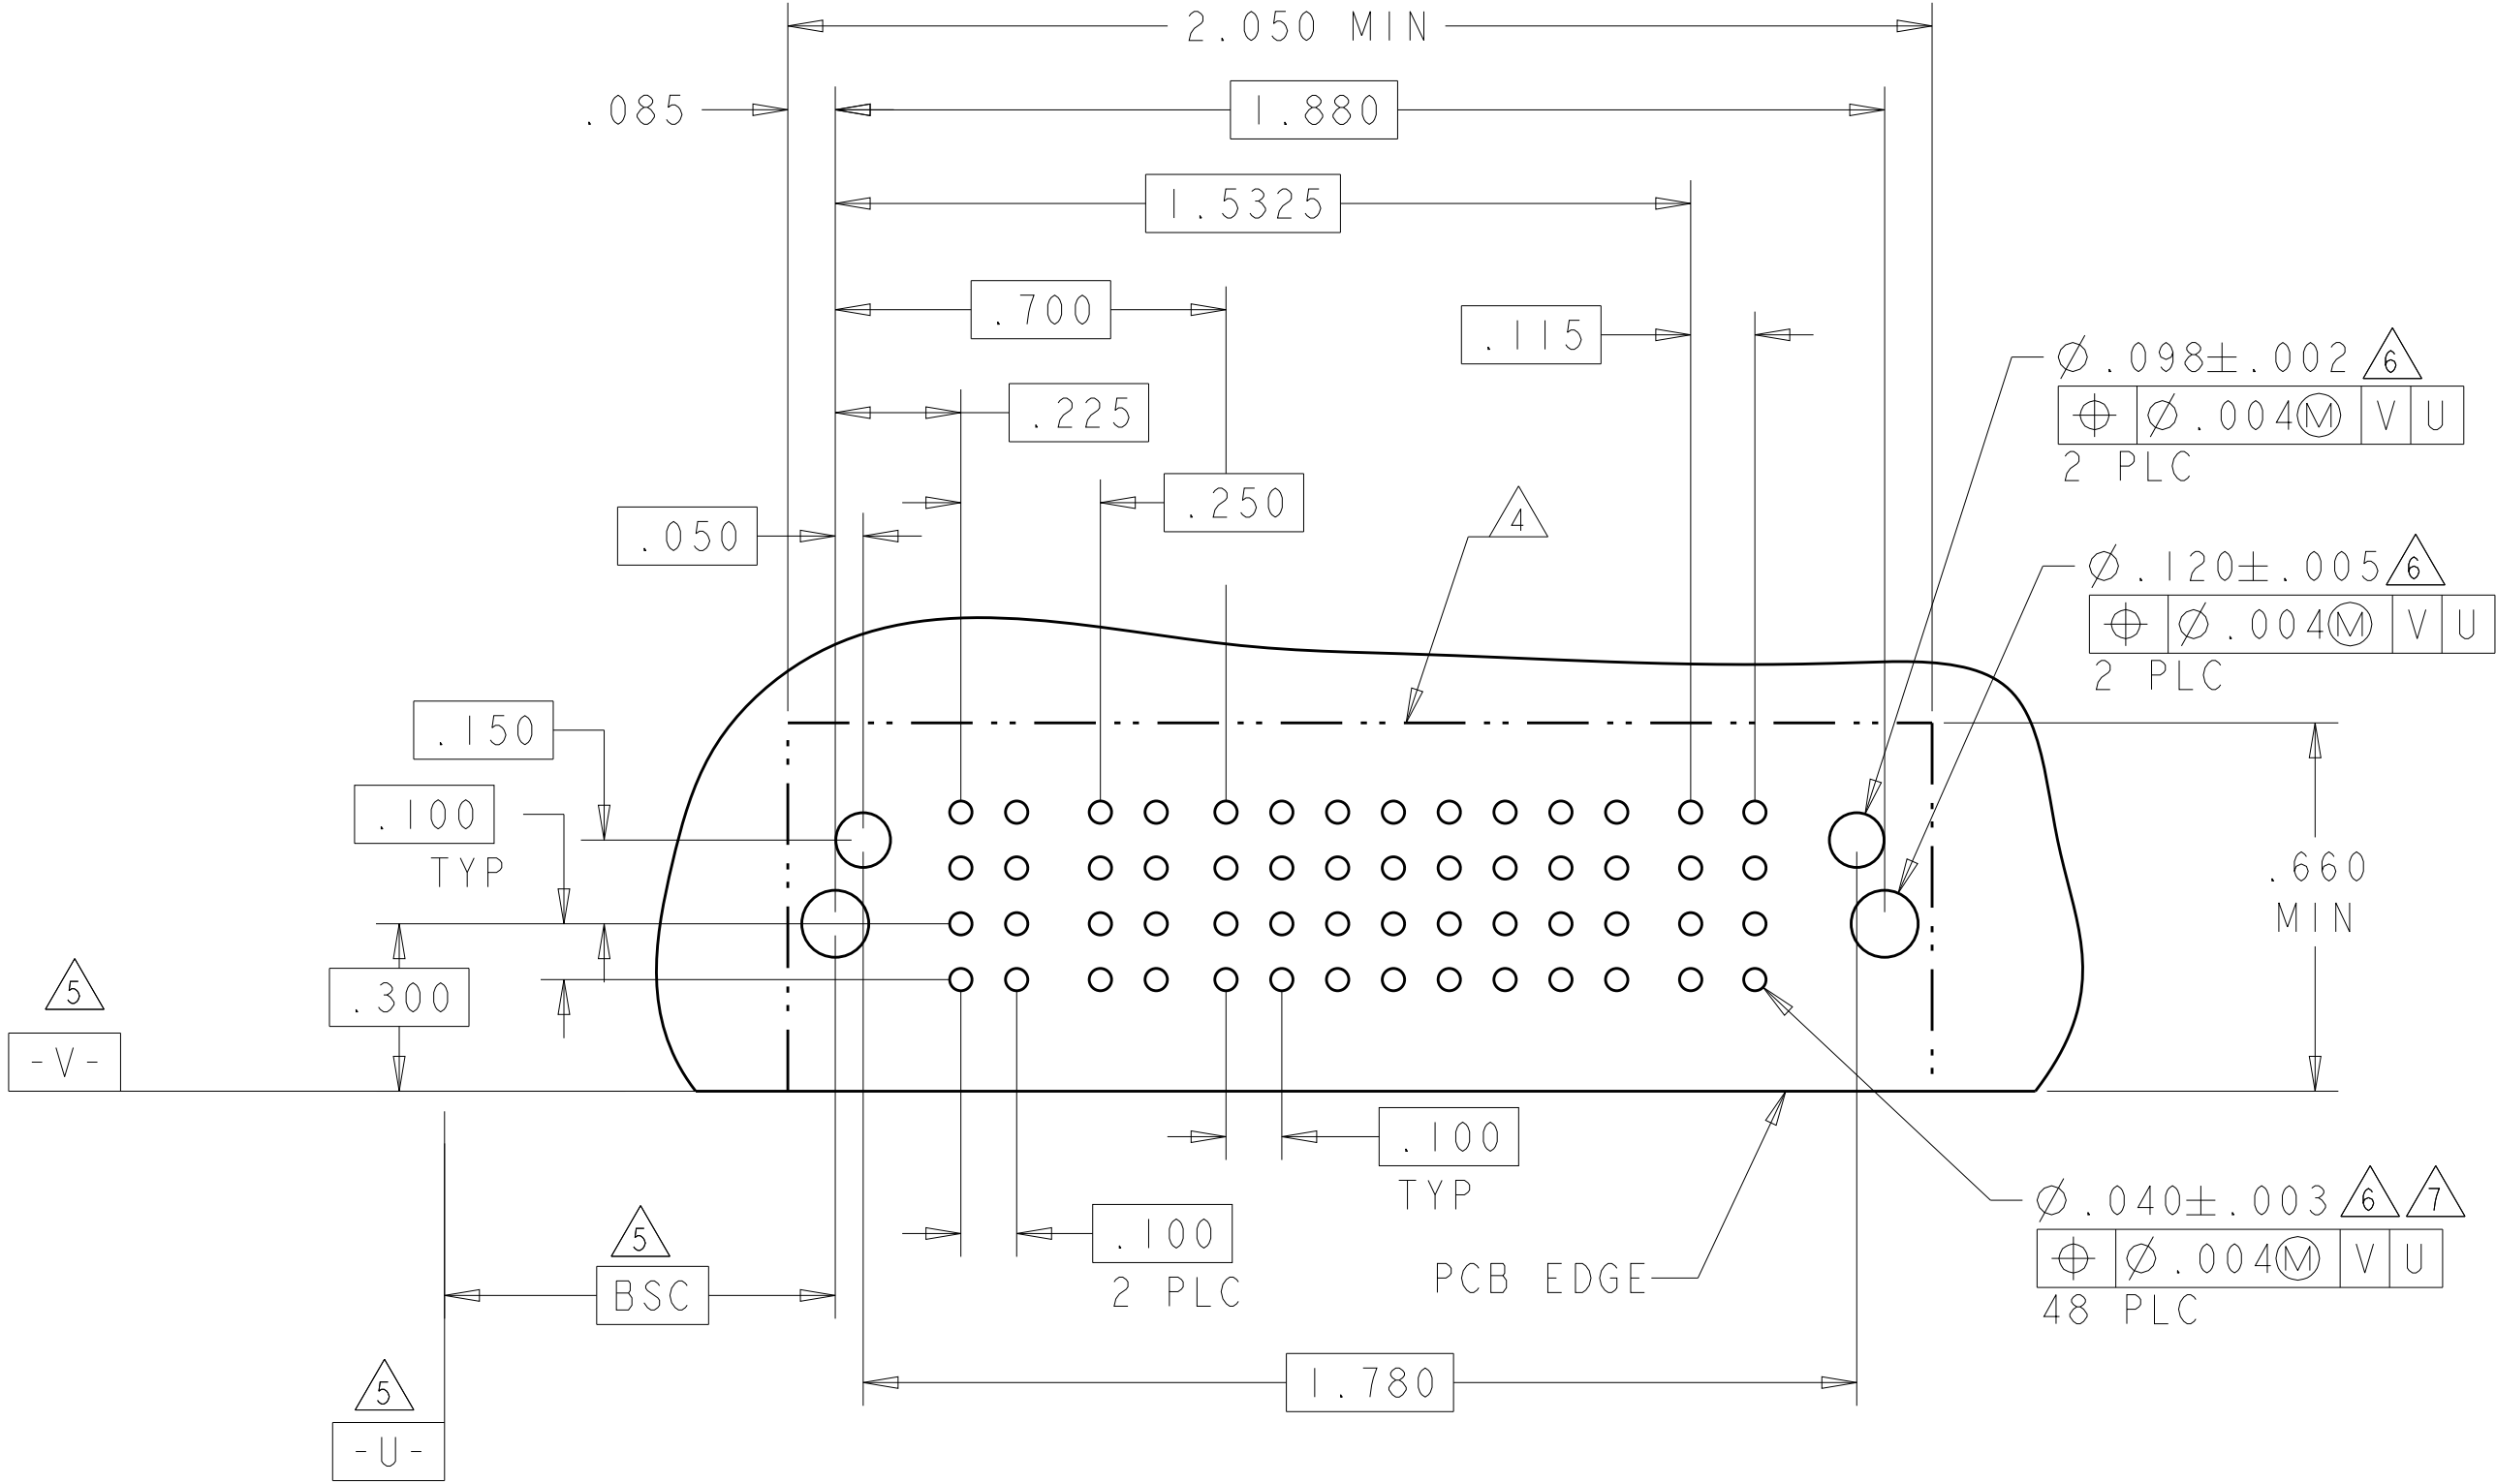

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S.ZHAO

10APR2007

CHK

S.ZHAO

10APR2007

APVD

S.ZHAO

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±.2°

FINISH

MATERIAL

-

APPROVED

S.ZHAO

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

5


OF


42


REV


S2


TE Connectivity

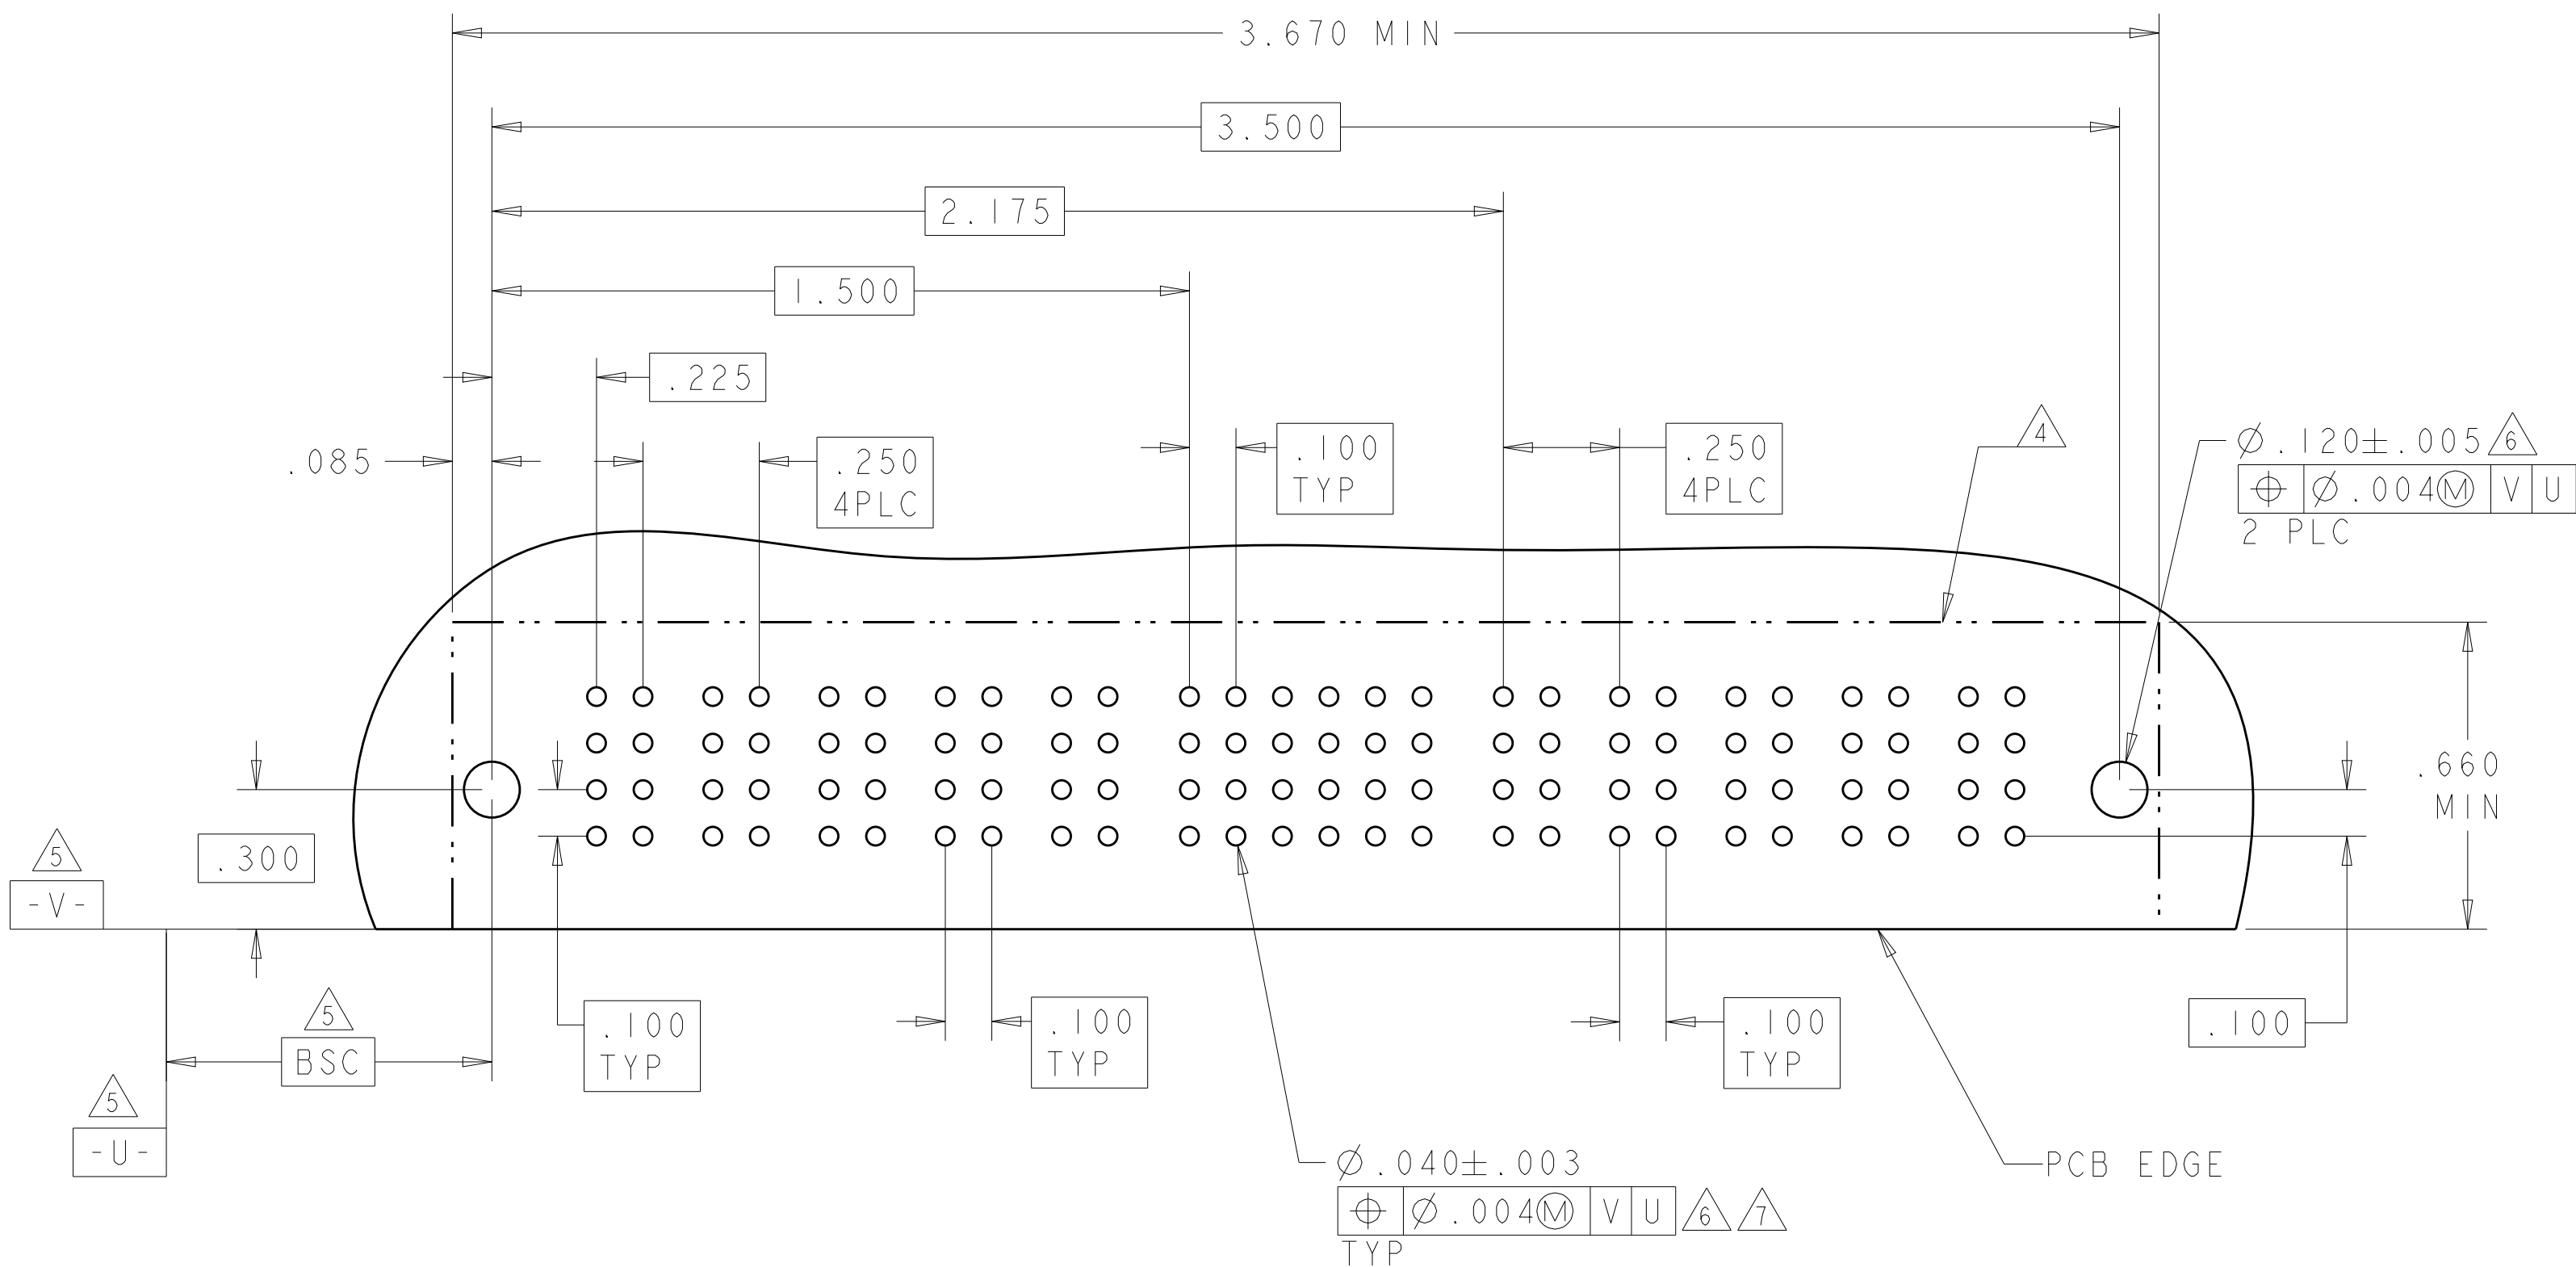[illegible]4805 (3/11)

PART NUMBER	ROWS		POWER			SIGNAL						POWER					
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6			
6450830-9	D			TM	TM	TM	J	J	J	J	J	J		TM	TM	TM	
	K						K	K	K	K	K	K					
	N						N	N	N	N	N	N					
	S						S	S	S	S	S	S					
3P + 24S + 3P																	
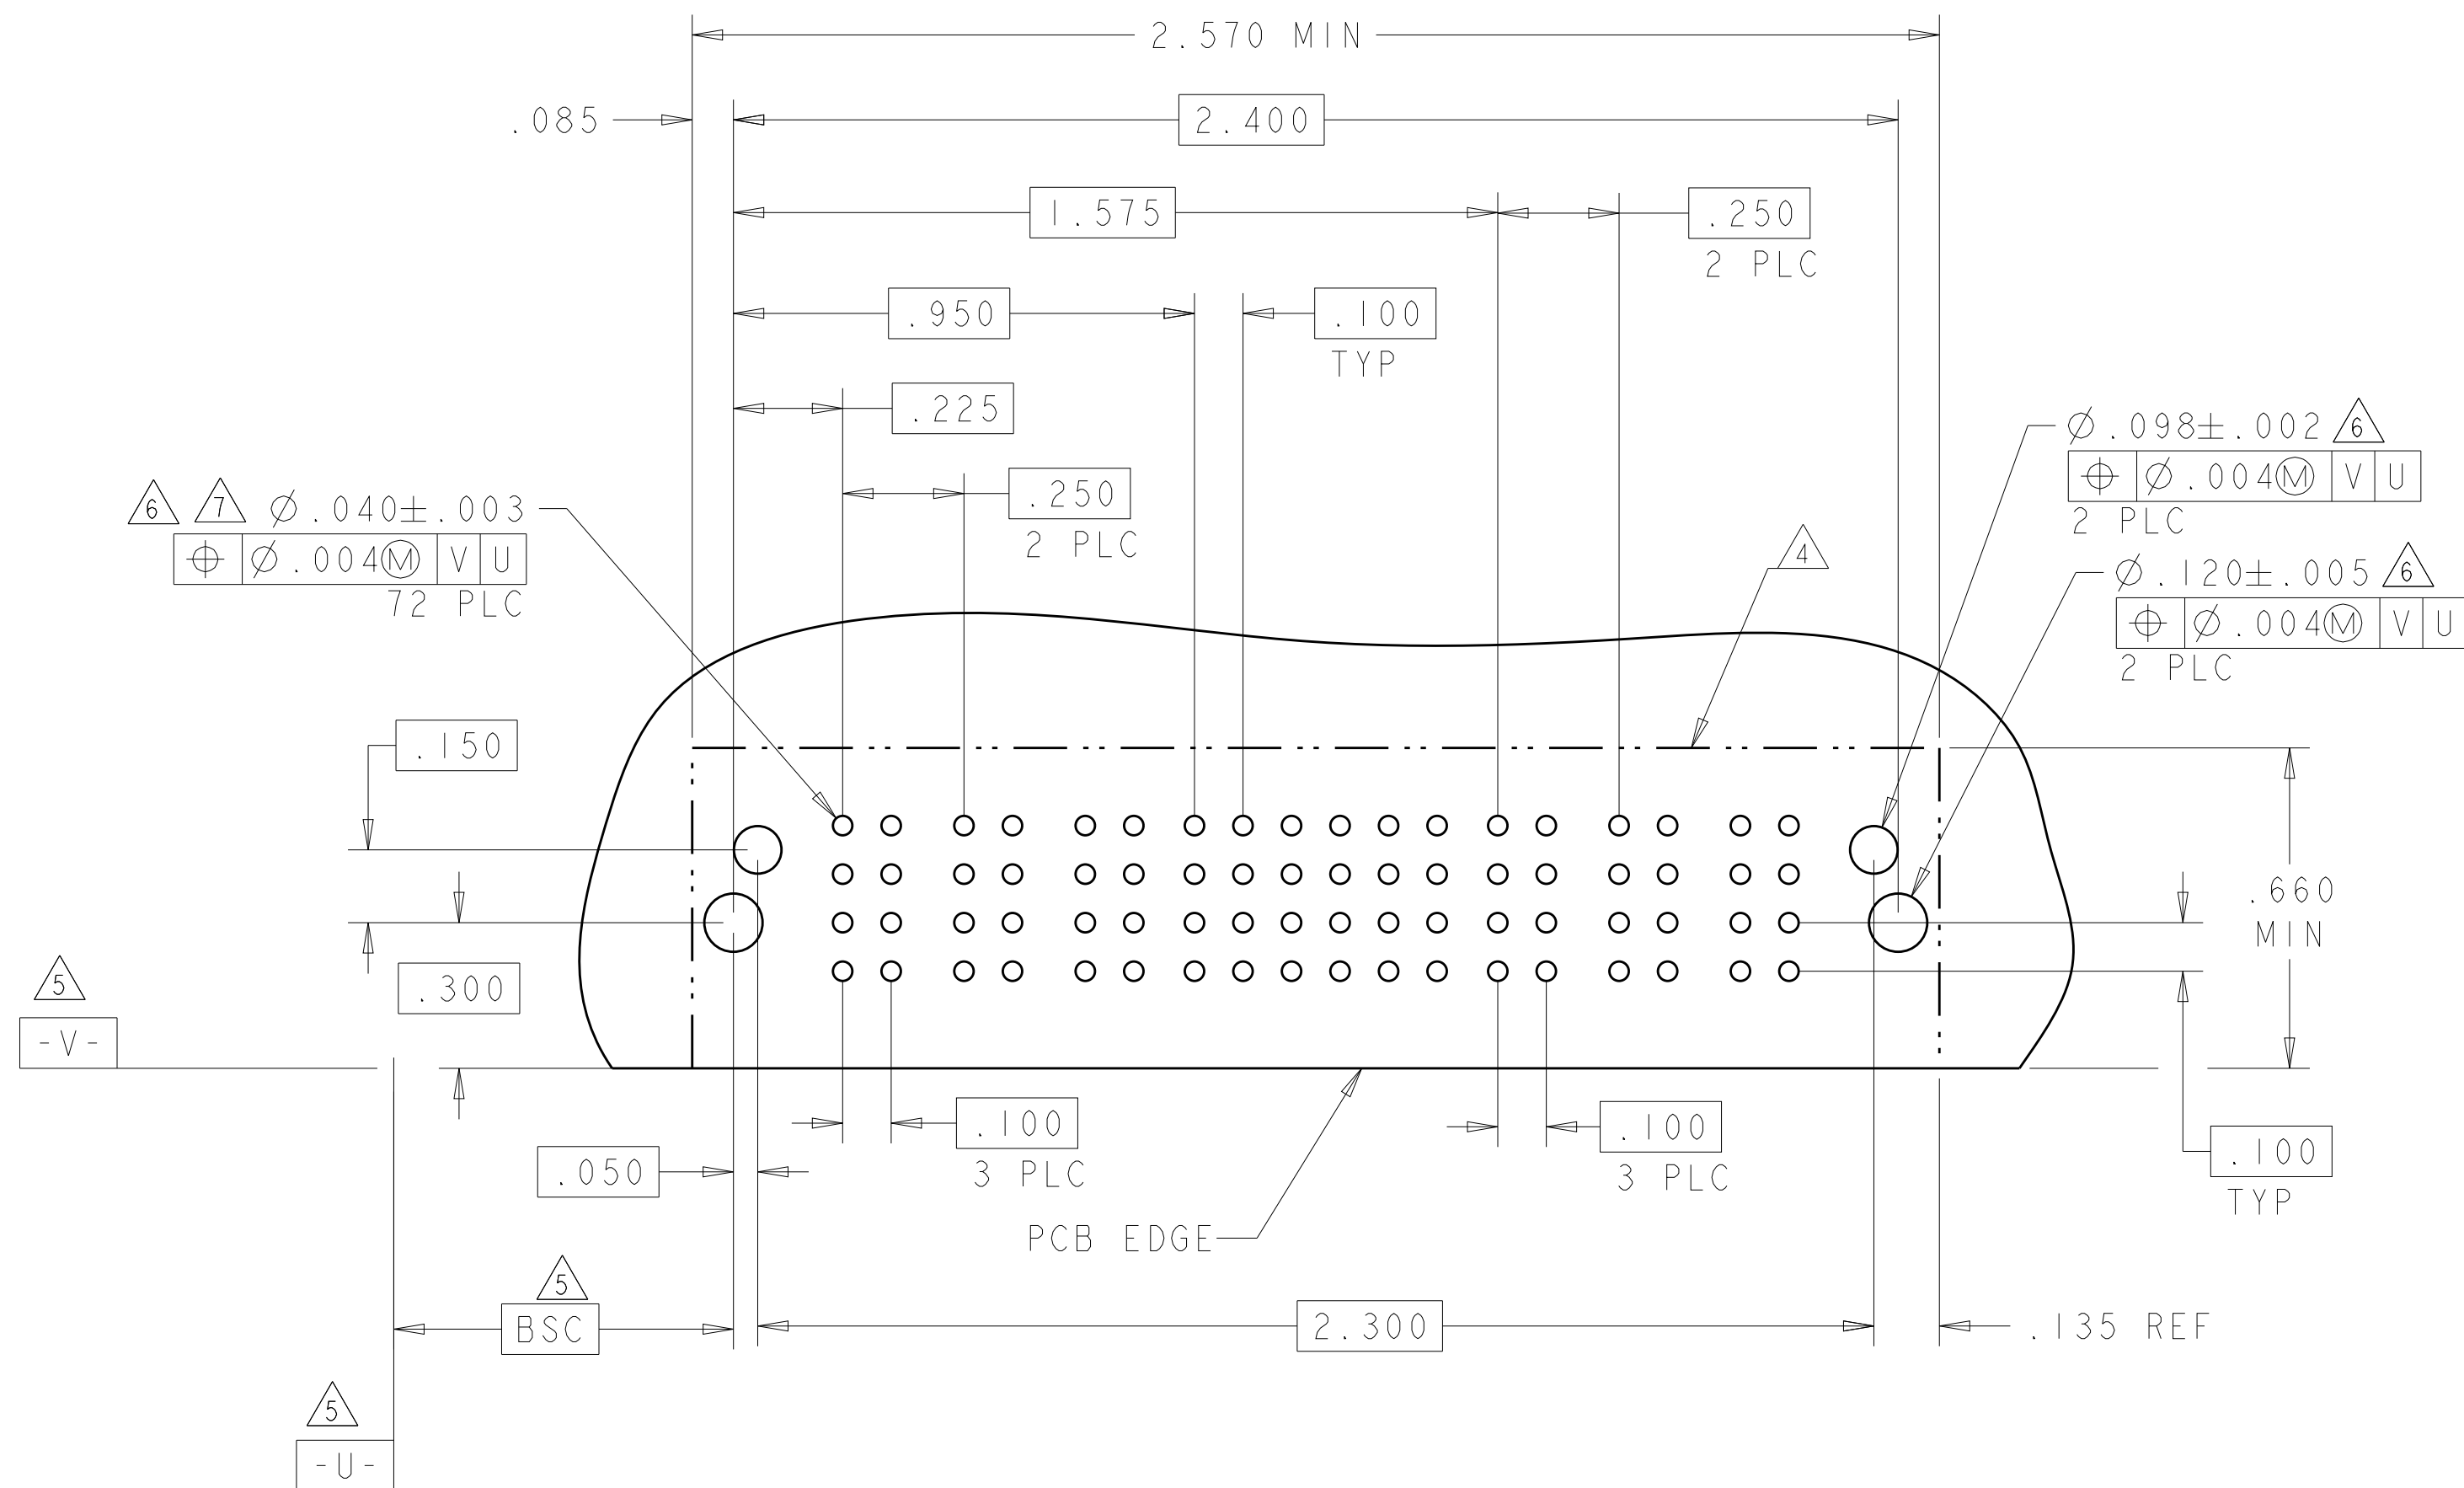
$$3P + 24S + 3P$$
4805 (3/11)

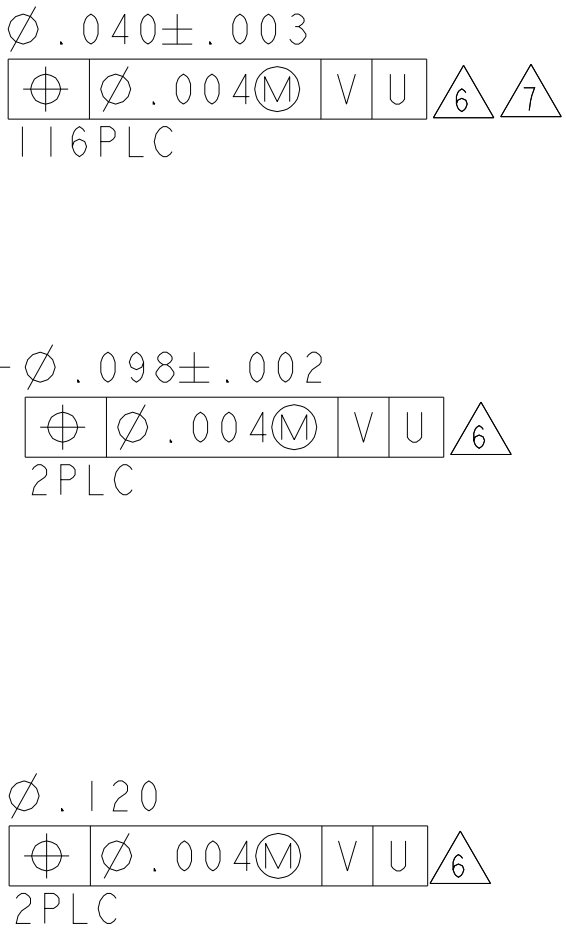NO CONTACTS LOADED4805 (3/11)

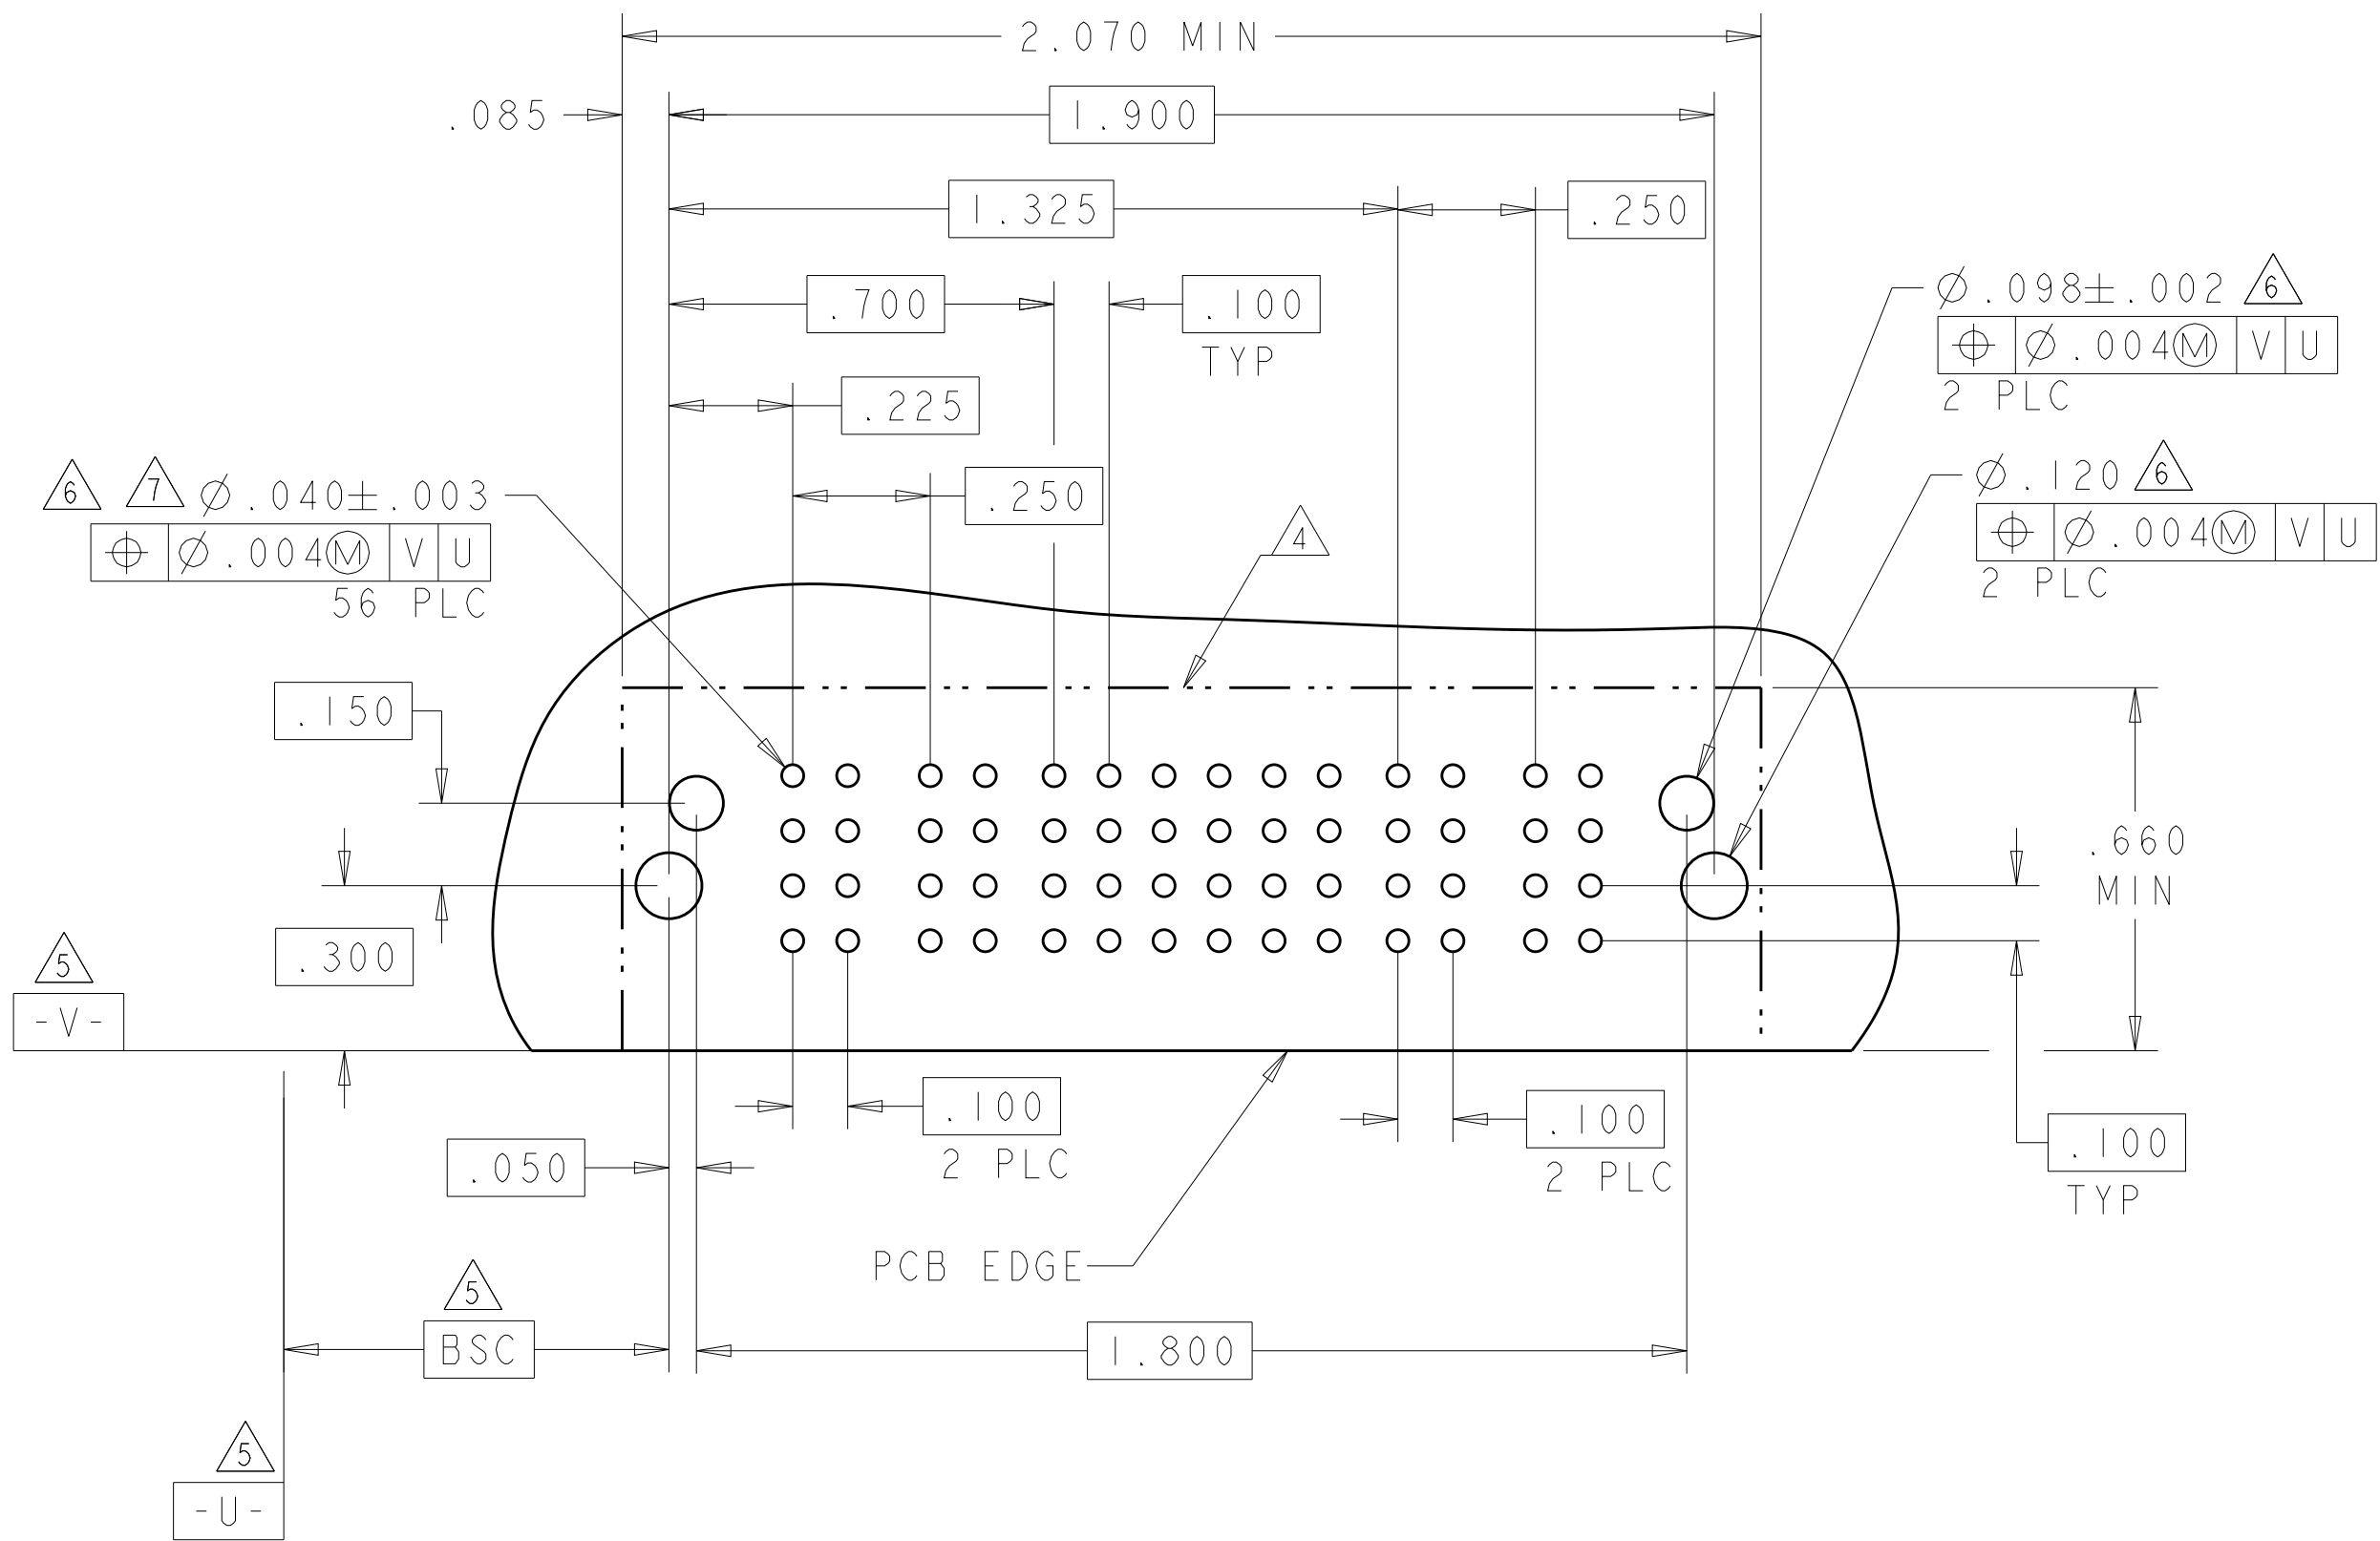
[illegible]





LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER								SIGNAL					POWER					
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	LP1	LP2	LP3	LP4	LP5	
I-6450830-2	D C B A		TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	LMF		LM		LM		
										K	K	K	K	K							
										N	N	N	N	N							
8HDP + 20S + 5LP											S	S	S	S	S						HD


.250
6 PLC

.200
6 PLC

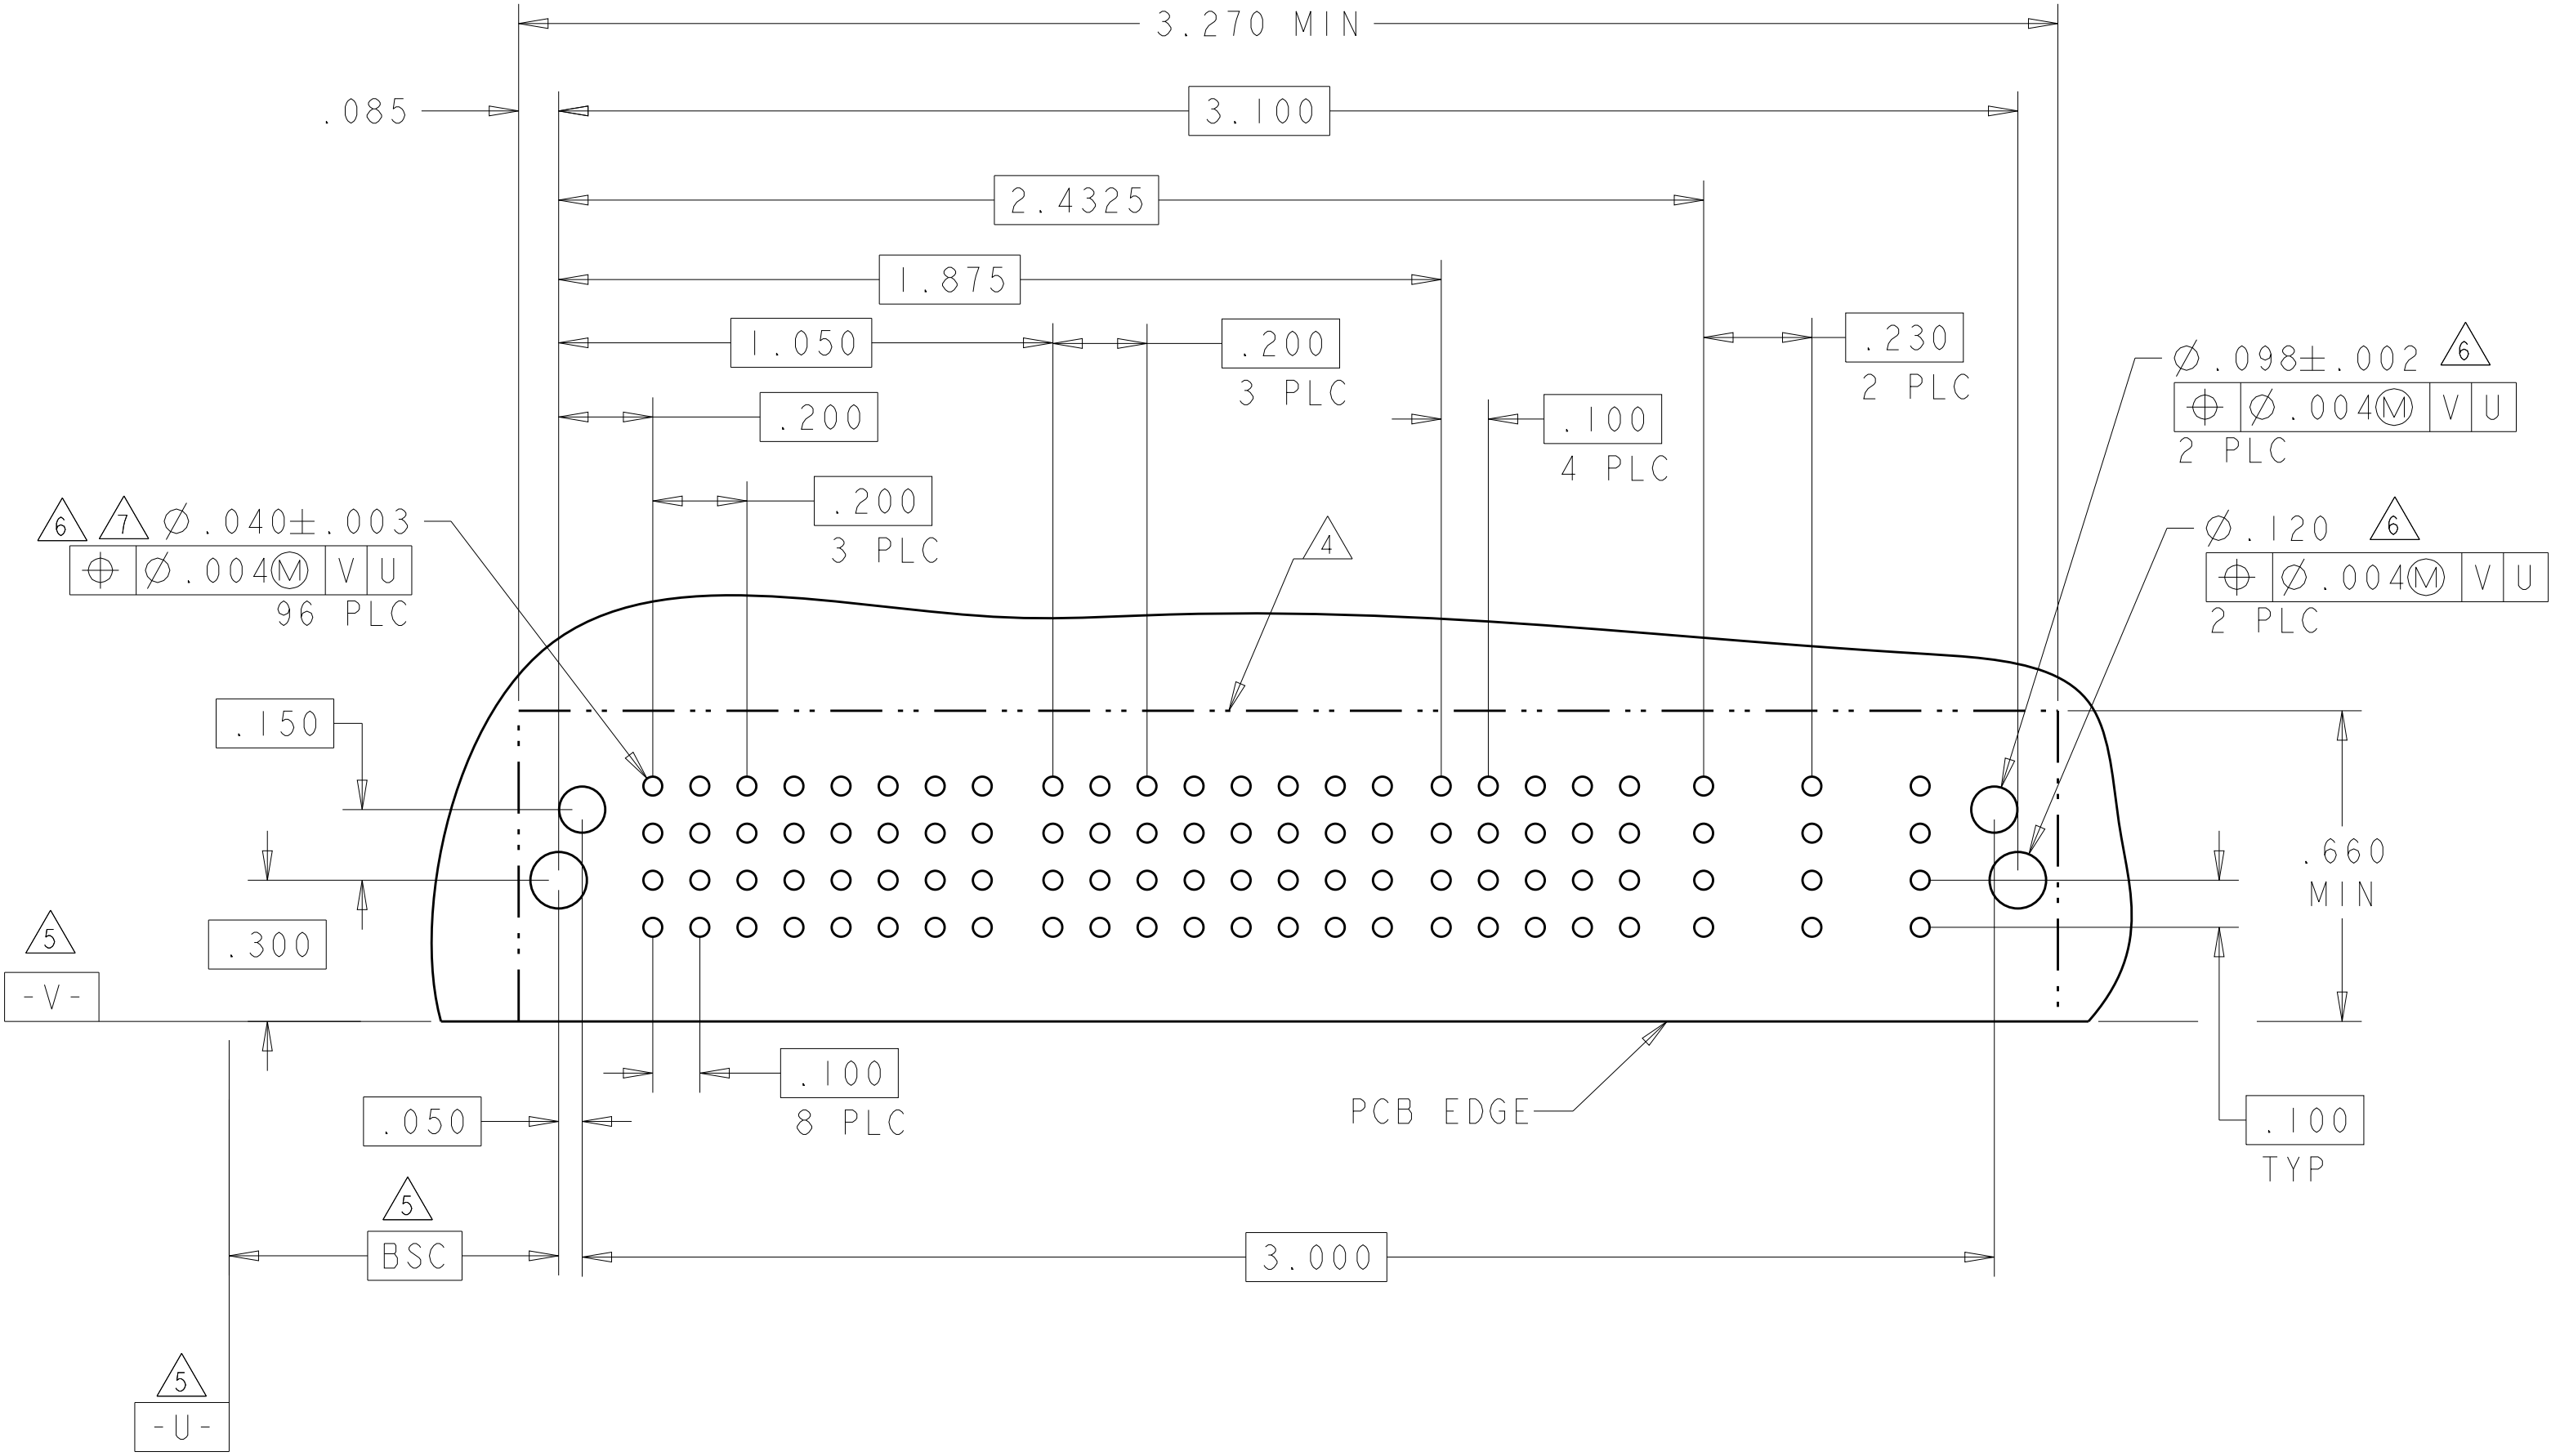

PART NUMBER	ROWS		POWER				SIGNAL							POWER			
			P1	P2	P3	P4	1	2	3	4	5	6	7	P5	P6	P7	
1-6450830-5	D C B A	 HD	 TM	 TM	 TM	 TM	J	J	J	J	J			 TM	 TM		 HD
							K	K	K	K	K						
							N	N	N	N	N						
							S	S	S	S	S						
4P + 28S + 3ACP																	

NO CONTACTS LOADED

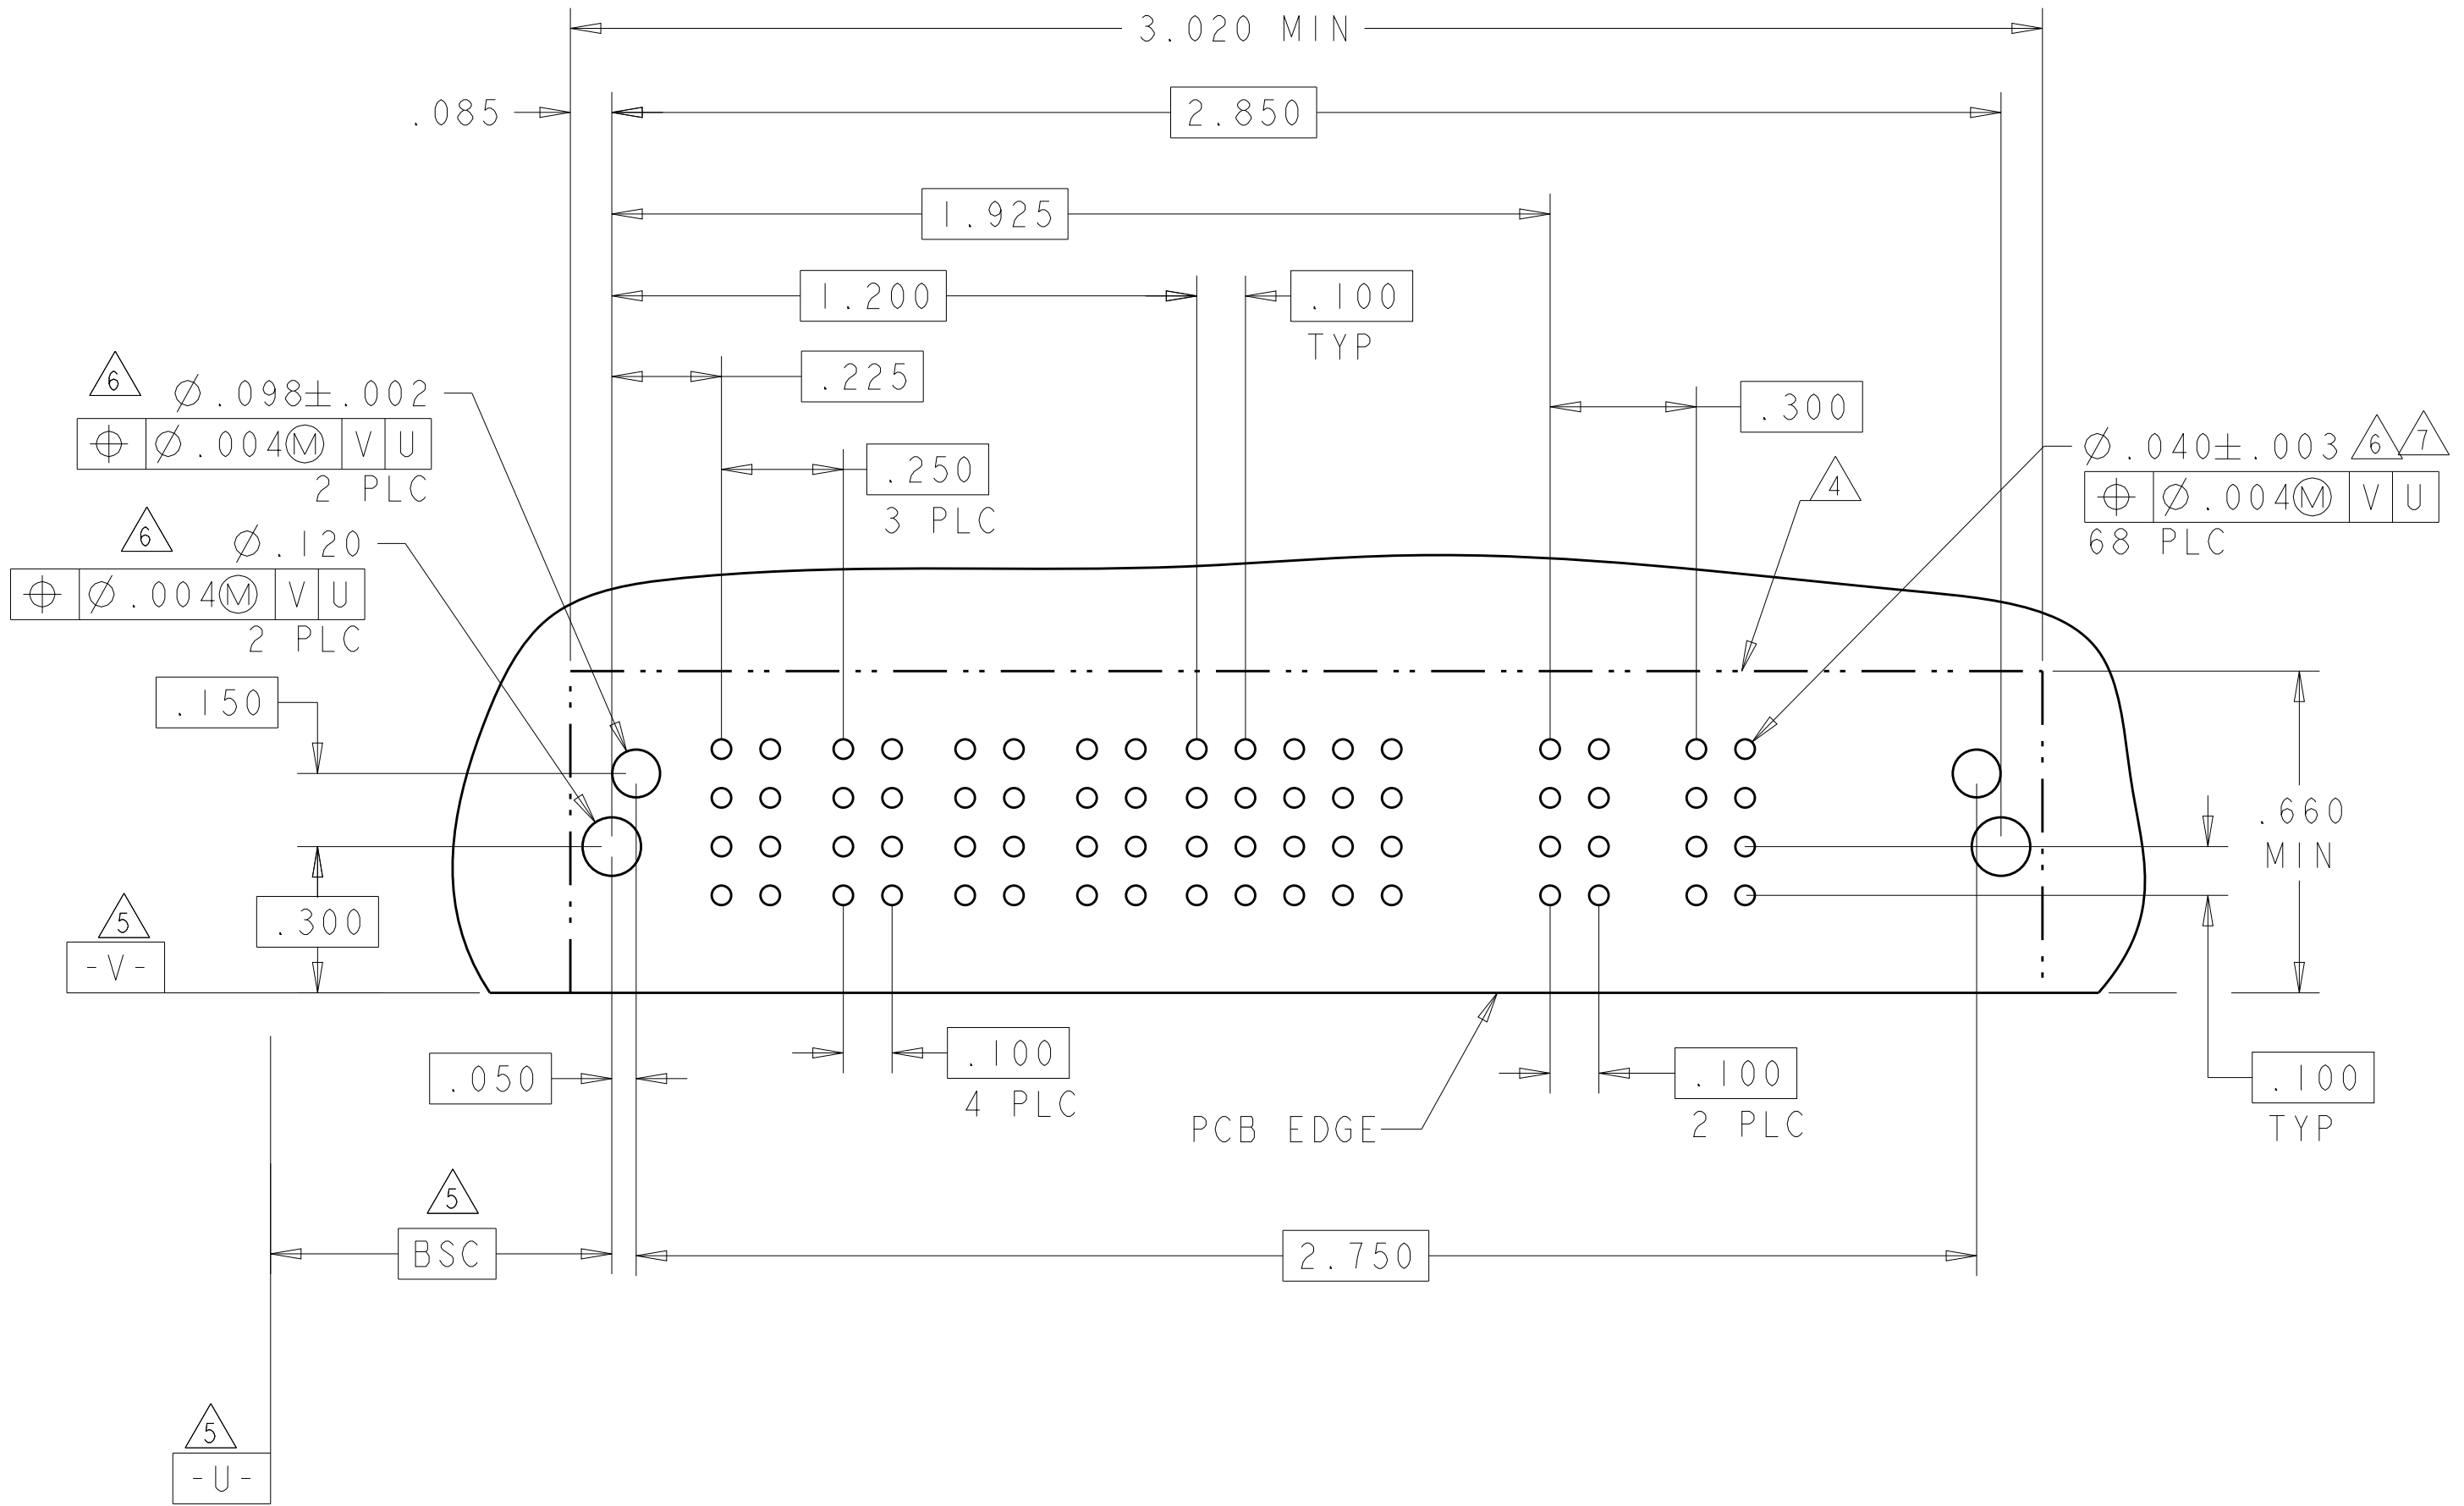

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
S.ZHAO
CHK
S.ZHAO
APVD
S.ZHAO

10APR2007
10APR2007
-

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT
-

CUSTOMER DRAWING

NAME
RIGHT ANGLE WITH SHORT GUIDES
AND LP CONTACTS ASSEMBLY
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6450830

RESTRICTED TO
-


SCALE
4:1

SHEET
10

OF
42


REV
S2

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

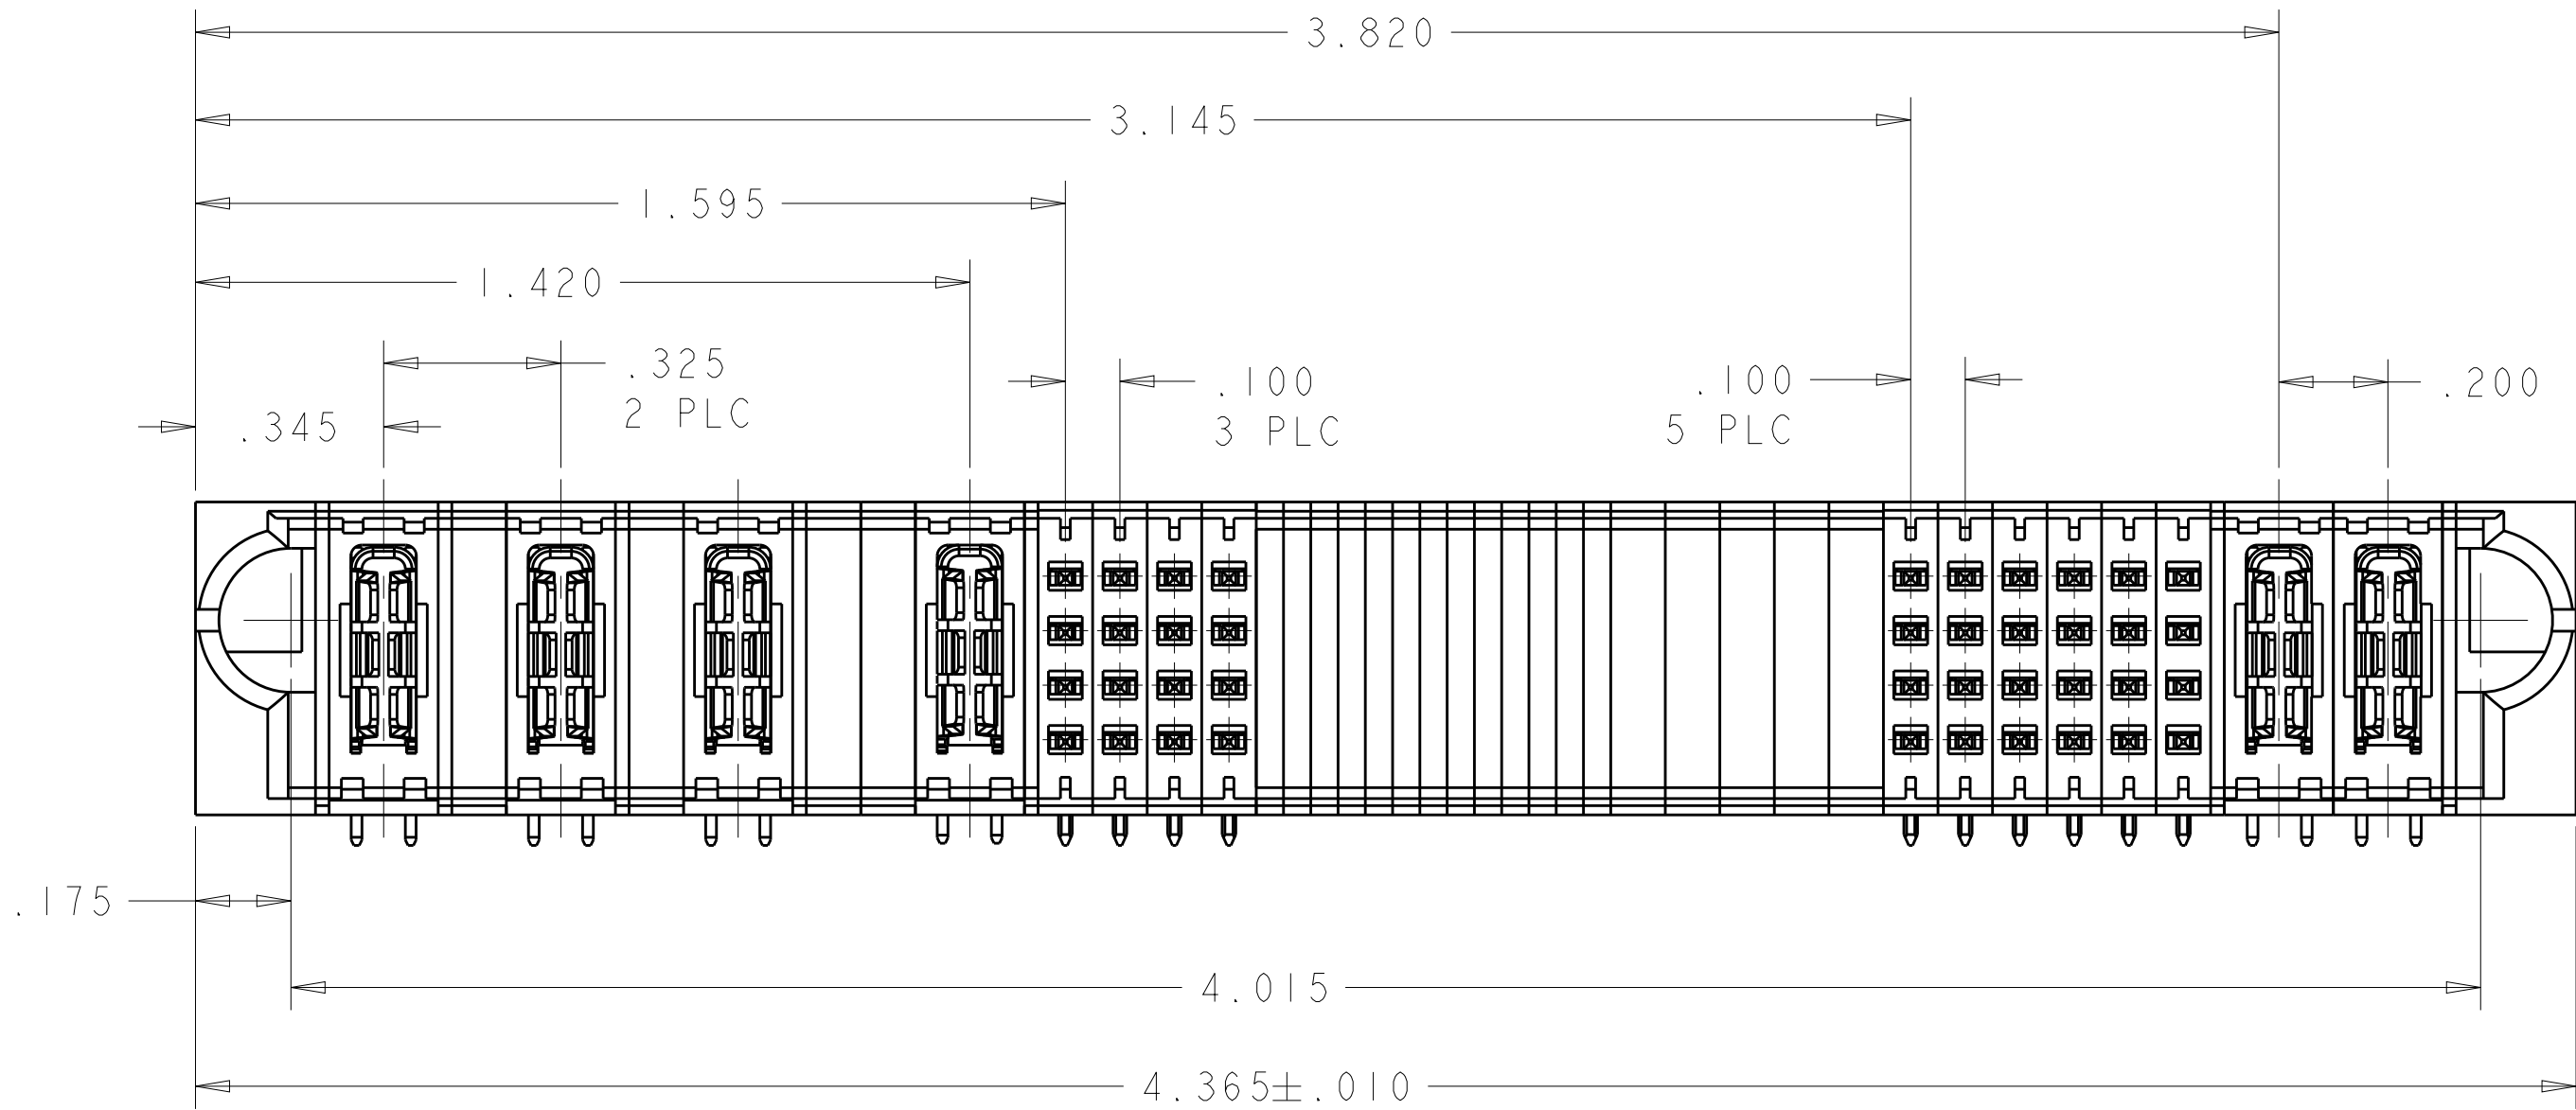

PART NUMBER: 1-6450830-8


PART NUMBER	ROWS	POWER				SIGNAL				BLANK	SIGNAL						POWER	
		P1	P2	P3	P4	1	2	3	4		5	6	7	8	9	10	P5	P6
1-6450830-8	D C B A	TM	TM	TM	TM	J	J	J	J		J	J	J	J	J	J	TM	TM
						K	K	K	K		K	K	K	K	K	K		
						N	N	N	N		N	N	N	N	N	N		
						S	S	S	S		S	S	S	S	S	S		
4P + 16S + 24S + 2HDP																		

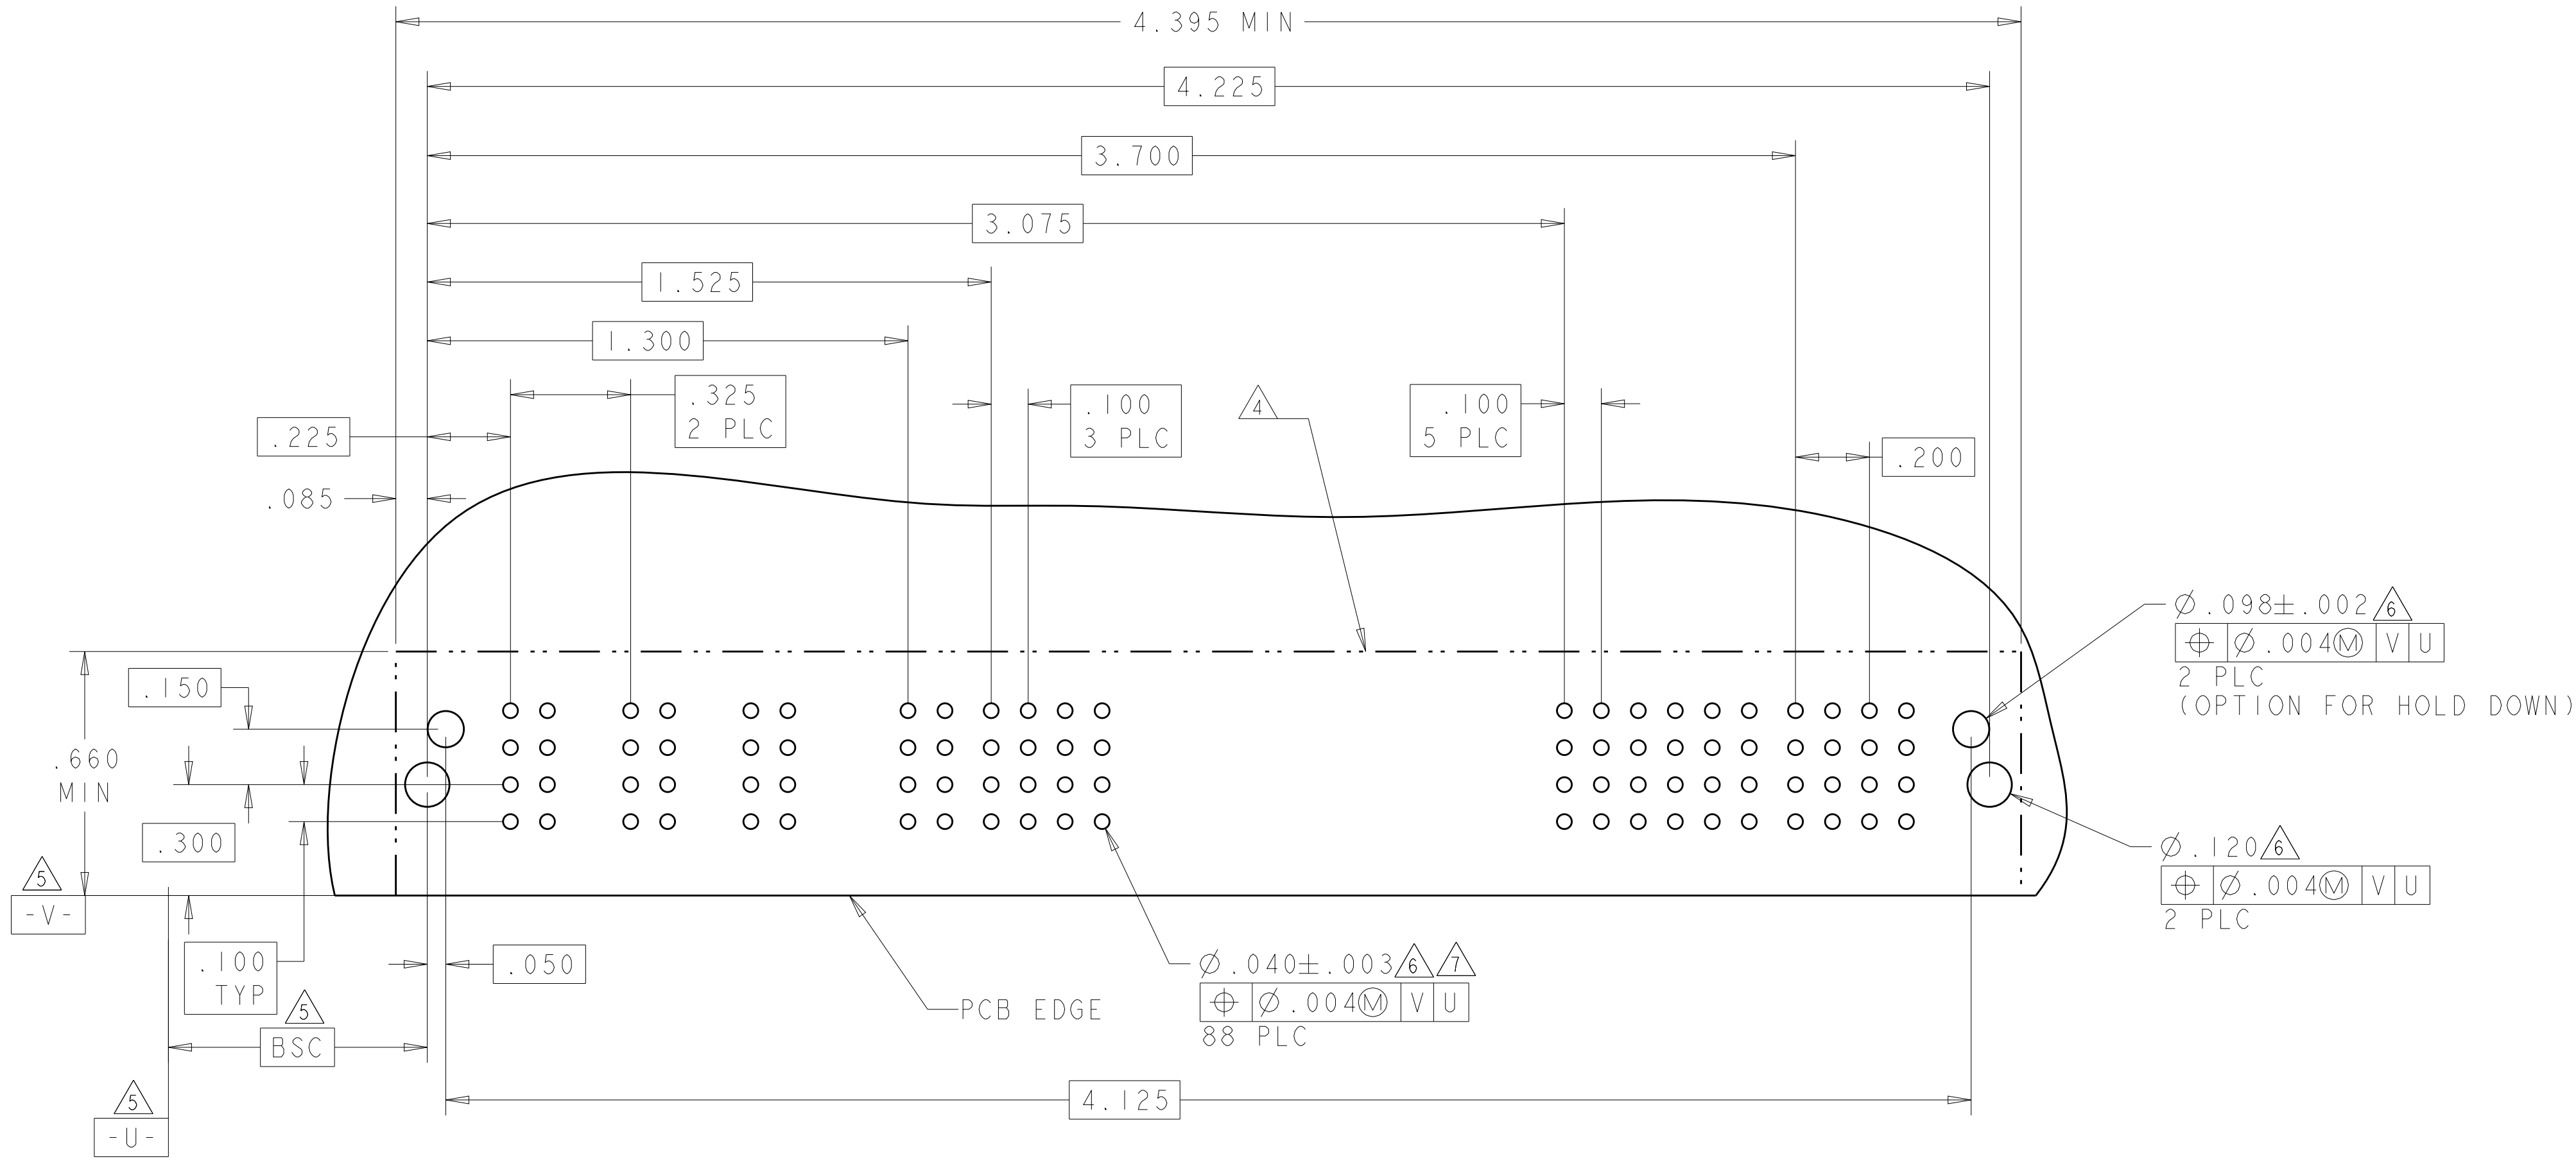


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	S.ZHAO	10APR2007	 TE Connectivity	
		CHK	S.ZHAO	10APR2007		
DIMENSIONS:		APVD	S.ZHAO	-	NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
INCHES		PRODUCT SPEC				
		I08-2292				
		APPLICATION SPEC				
		114-13251				
MATERIAL		WEIGHT		SIZE		
-		-		CAGE CODE		
				DRAWING NO		
				RESTRICTED TO		
				A100779C=6450830		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		
				-		

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL															
			P1	LP1	LP2	1	2	3	4	5	6	7	8	9	10	11	12	LP3	LP4	P2	
1-6450830-7	D		TM	LML	LML	E	E	E	E	E	E	E	E	E	E	E	LML	LMF	TM		
	F					F	F	F	F	F	F	F	F	F	F	F					
	G					G	G	G	G	G	G	G	G	G	G	G					G
	H					H	H	H	H	H	H	H	H	H	H	H					H
IP + 2LP + 48S + 2LP + IP																					

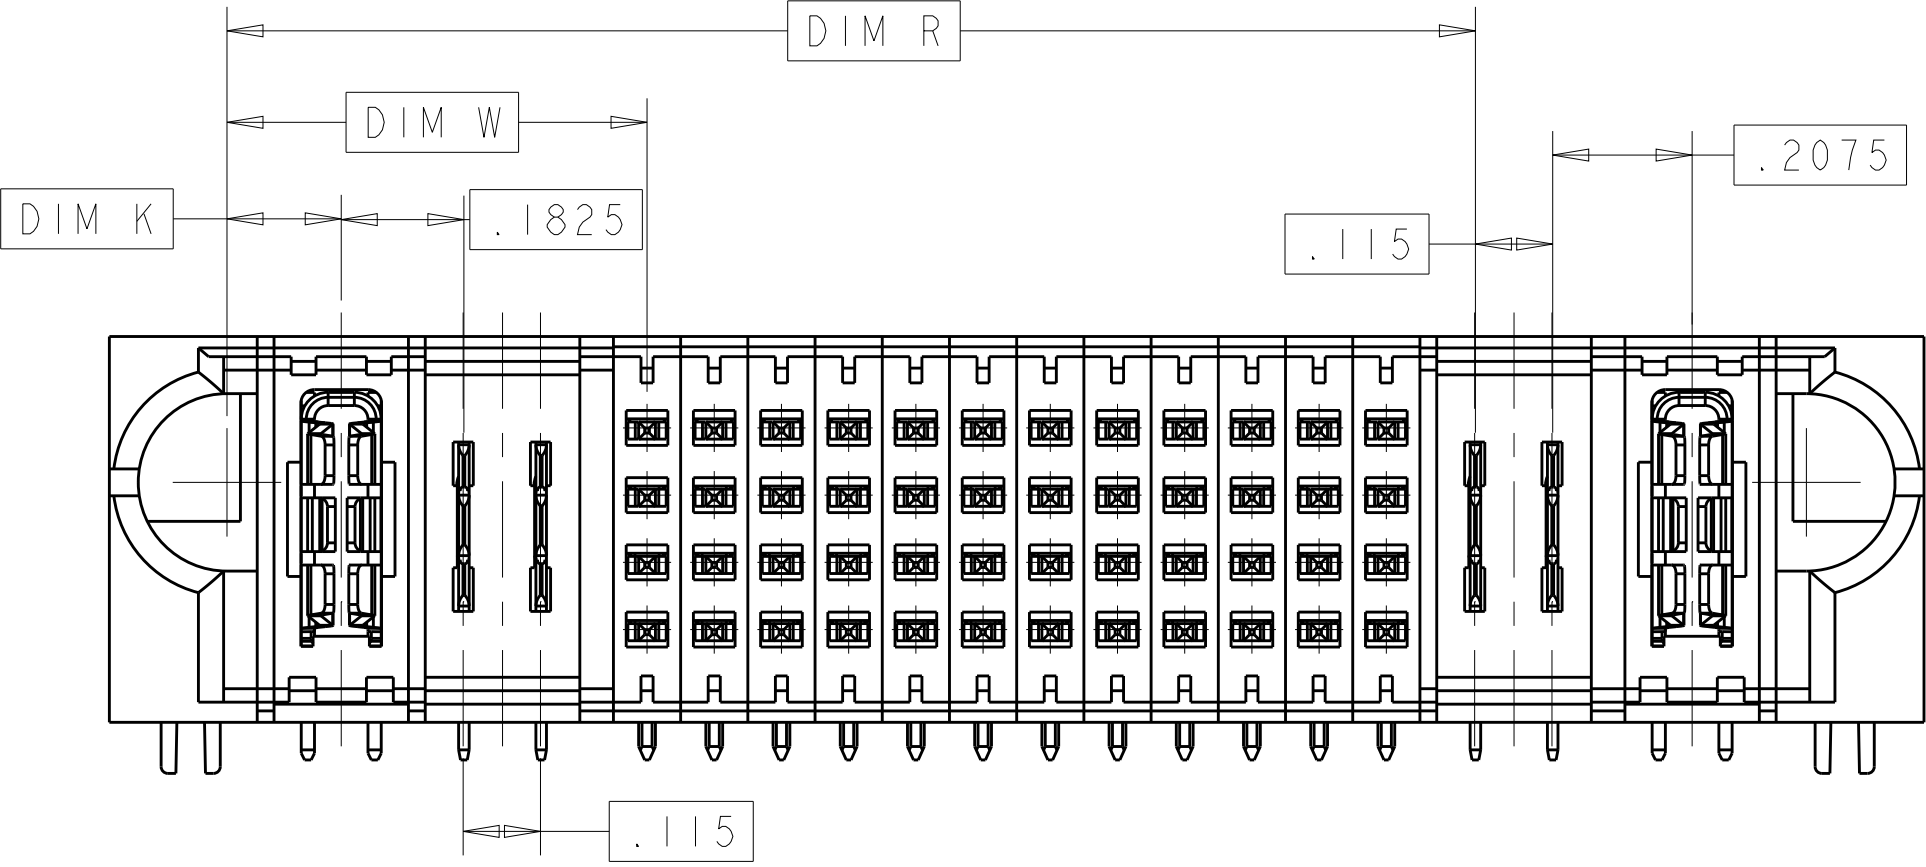

P/N:1-6450830-7 CONFIGURATION
UNSPECIFIED DIMENSION REFER TO SHEET 1

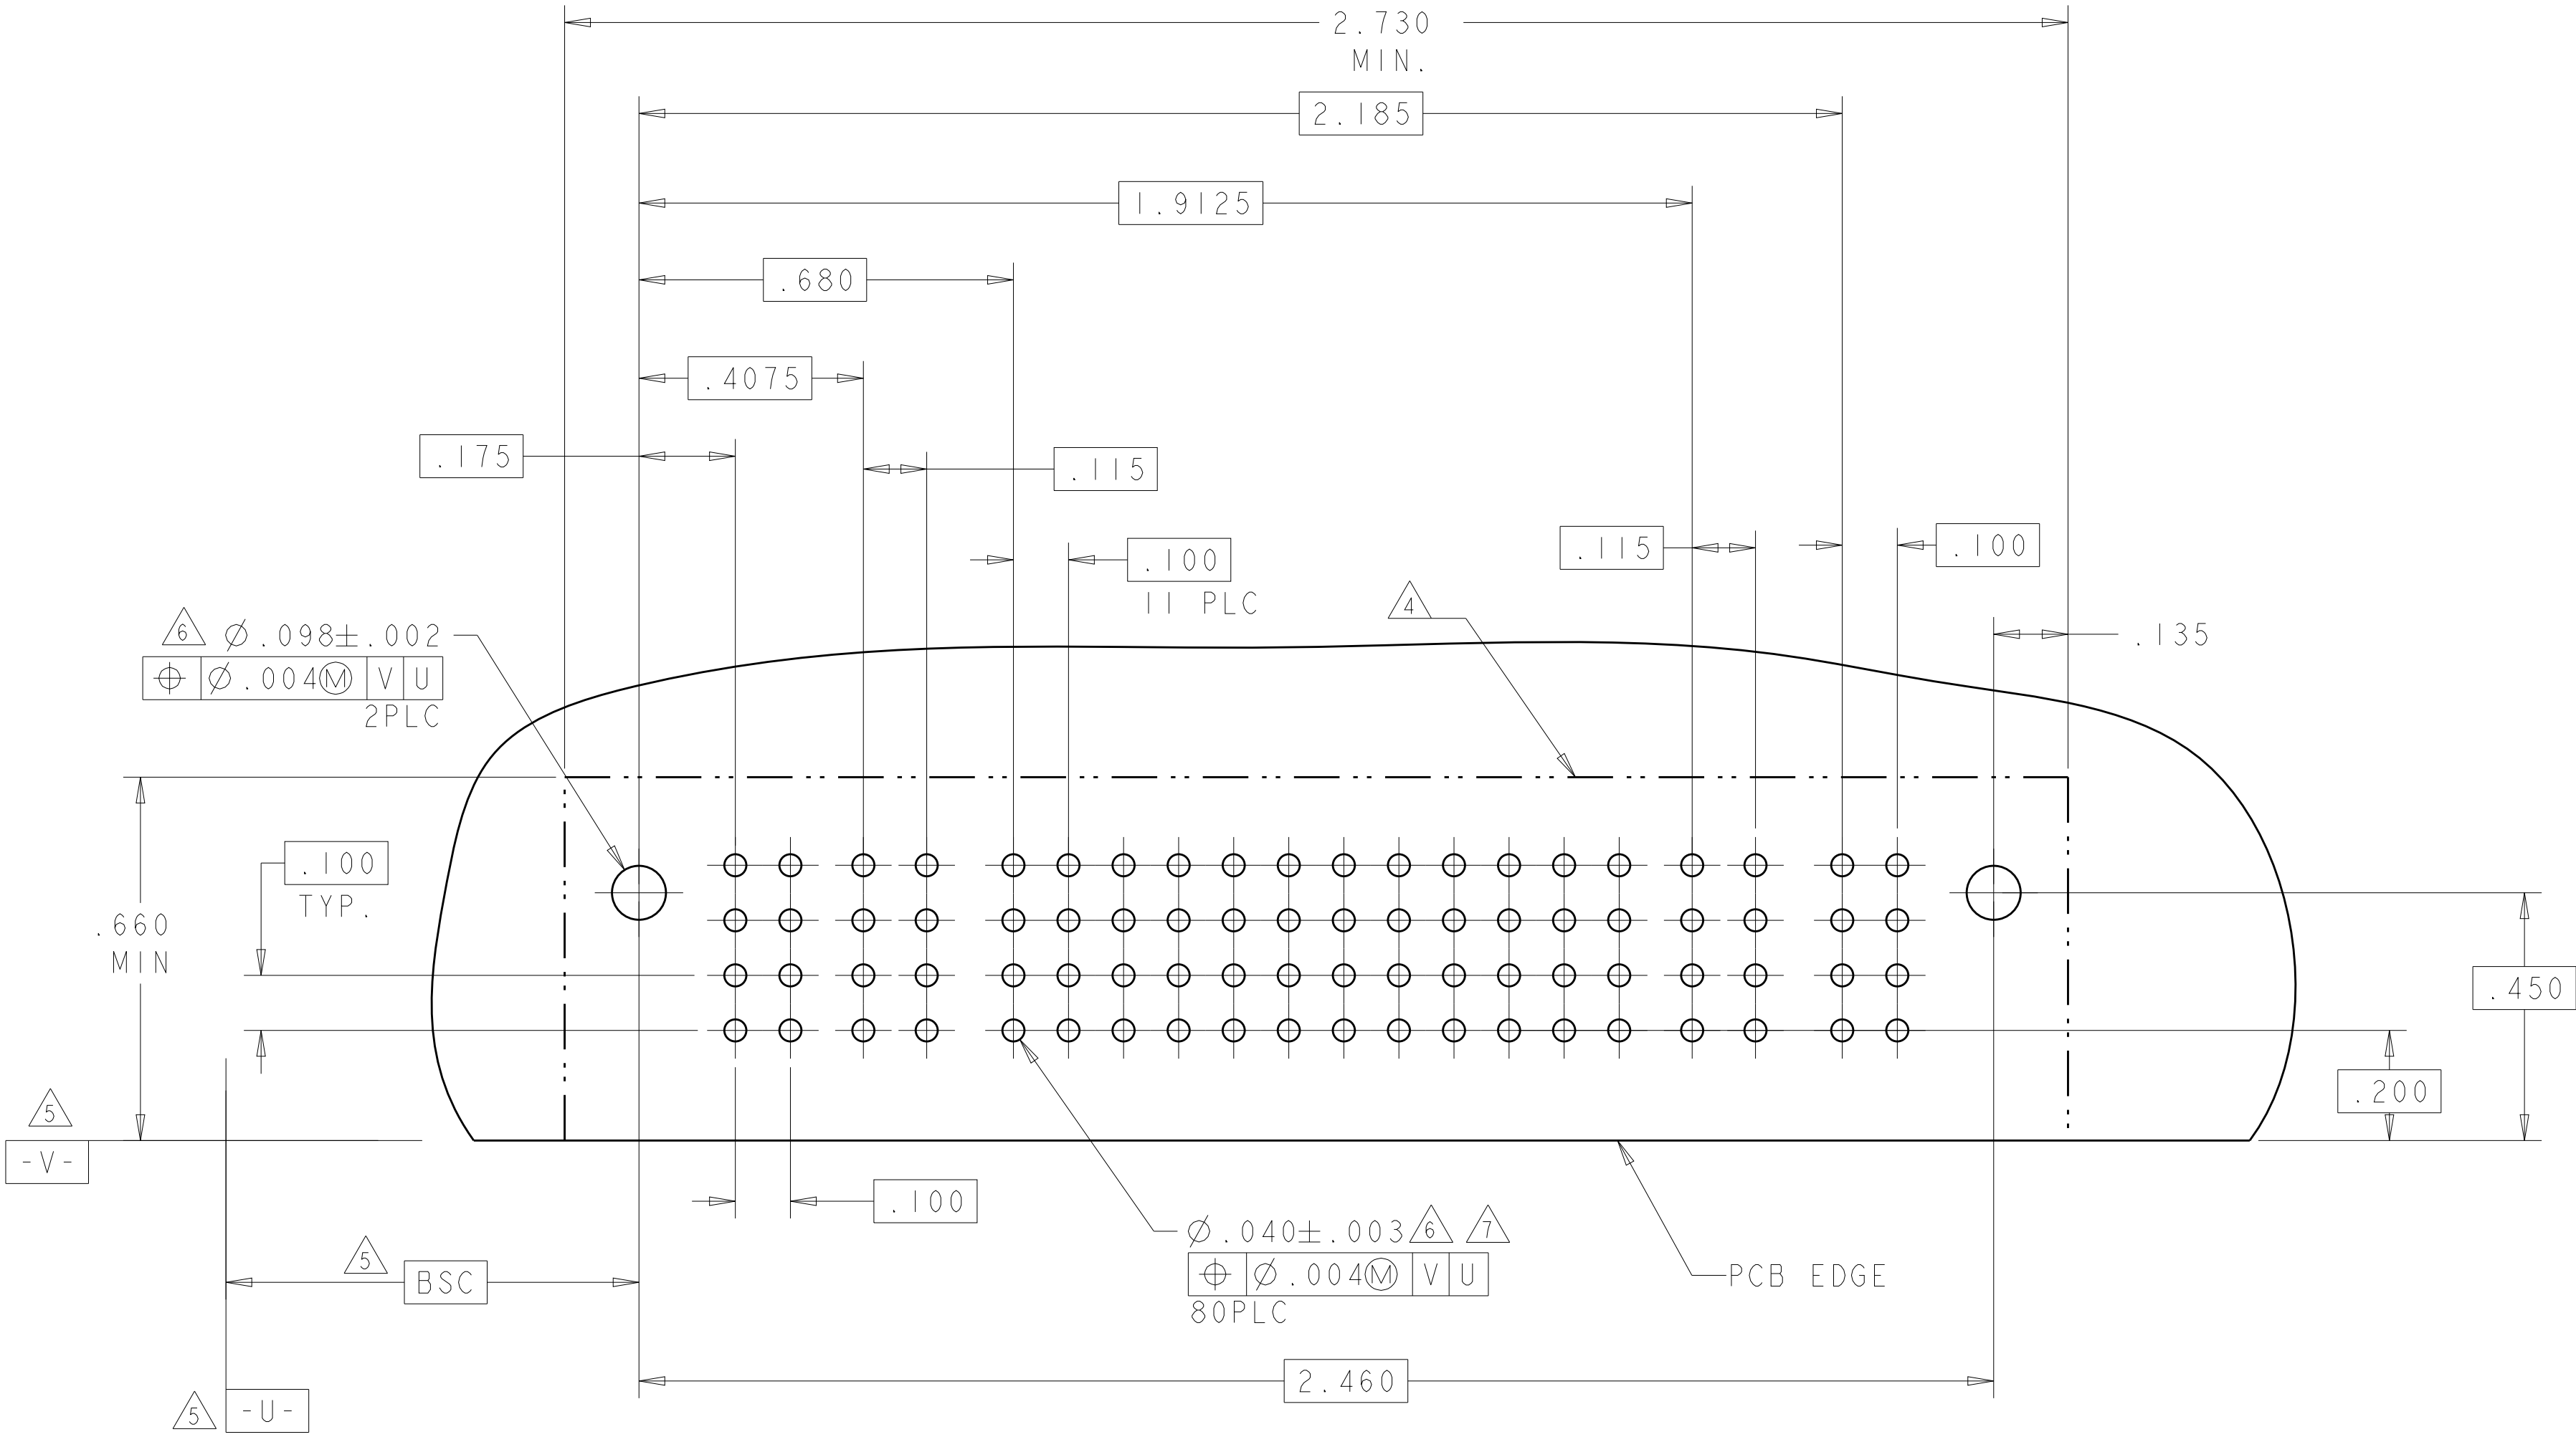

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S.ZHAO

10APR2007

CHK

S.ZHAO

10APR2007

APVD

S.ZHAO

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH

-

MATERIAL

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

CAGE CODE

DRAWING NO

A100779

©=6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

12

OF


42

REV


S2

TE Connectivity

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER				SIGNAL							POWER			
			P1	P2	P3	P4	1	2	3	4	5	6	7	P5	P6	P7	
I-6450830-9	D C B A	 	 TM	 TM	 TM	 TM	J	J	J	J	J			 TM	 TM	 TM	 
							K	K	K	K	K						
							N	N	N	N	N						
							S	S	S	S	S						
4P + 28S + 3ACP																	

NO CONTACTS LOADED

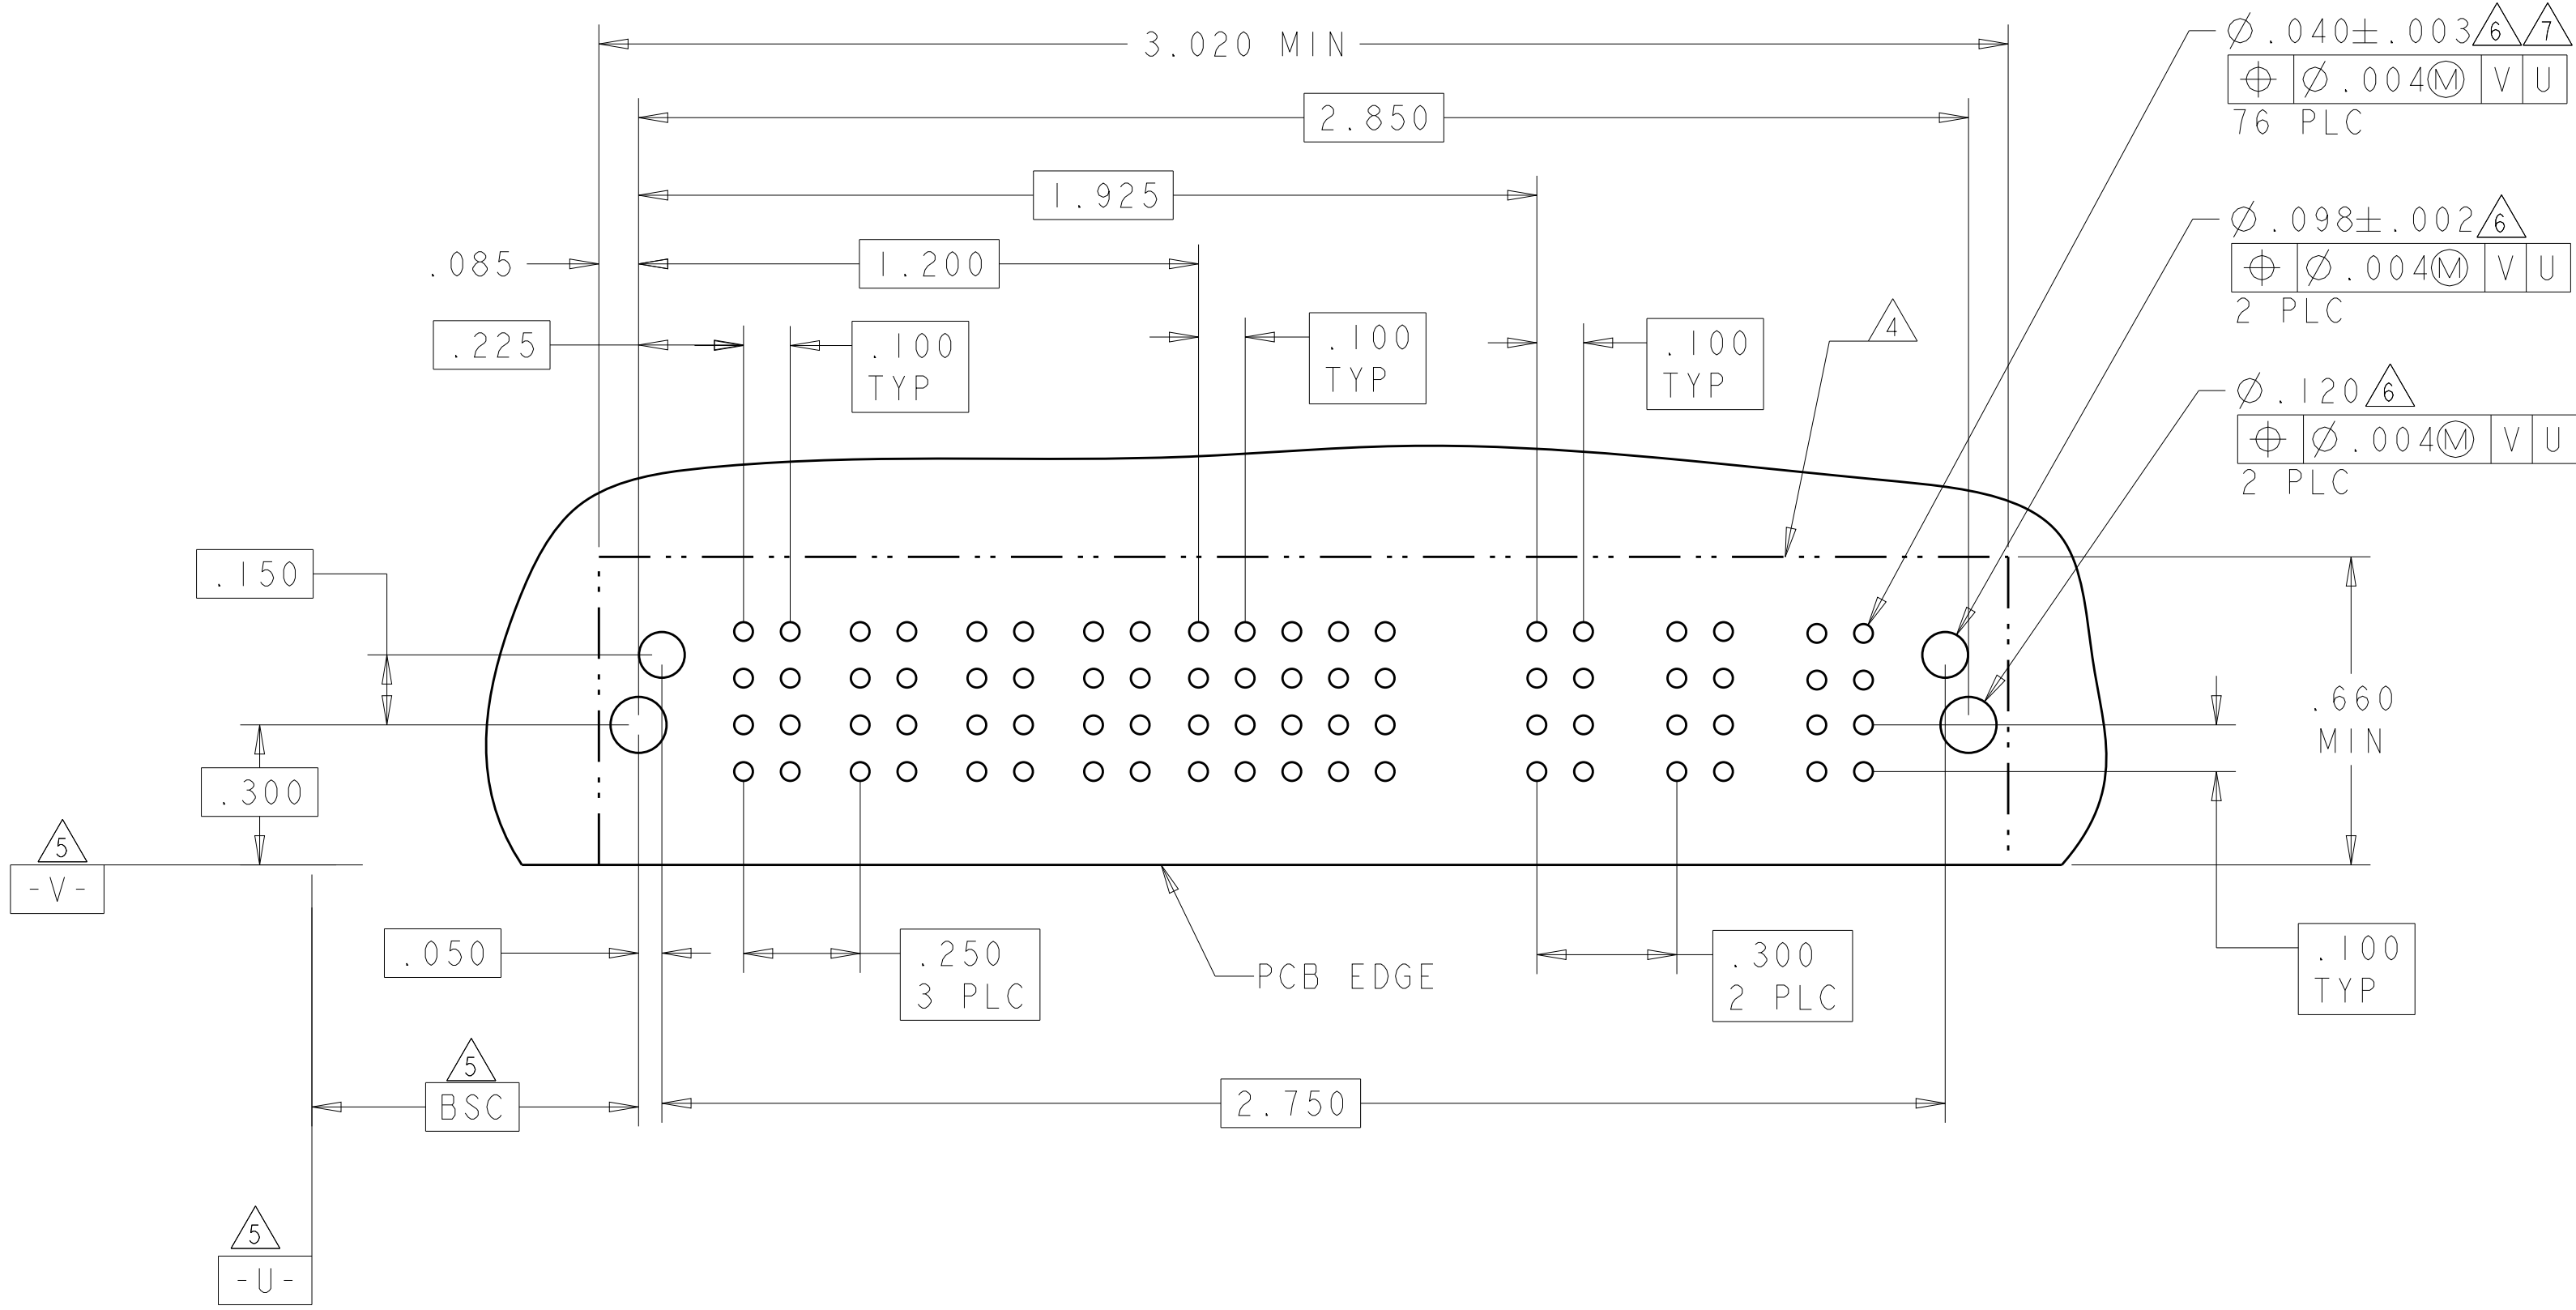

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S. ZHAO

10APR2007

CHK

S. ZHAO

10APR2007

APVD

S. ZHAO

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH

MATERIAL

-

DWN

S. ZHAO

10APR2007

CHK

S. ZHAO

10APR2007

APVD

S. ZHAO

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

13

OF

42



REV

S2

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL										POWER		
			P1	P2	1	2	3	4	5	6	7	8	9	10	P3	P4	
2-6450830-4	D		TM	TM	J	J	J	J	J	J	J	J	J	J	TM	TM	
	C				K	K	K	K	K	K	K	K	K	K			
	B				N	N	N	N	N	N	N	N	N	N			
A	HD				S	S	S	S	S	S	S	S	S	S			HD
2P + 40S + 2P																	

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1		1	2	3	4	5	6	P2		
2-6450830-6	D		TM	J	J	J	J	J	J	TM			
	C			K	K	K	K	K	K				
	B			N	N	N	N	N	N				
	A			H	S	S	S	S	S				
IP + 24S + IP													

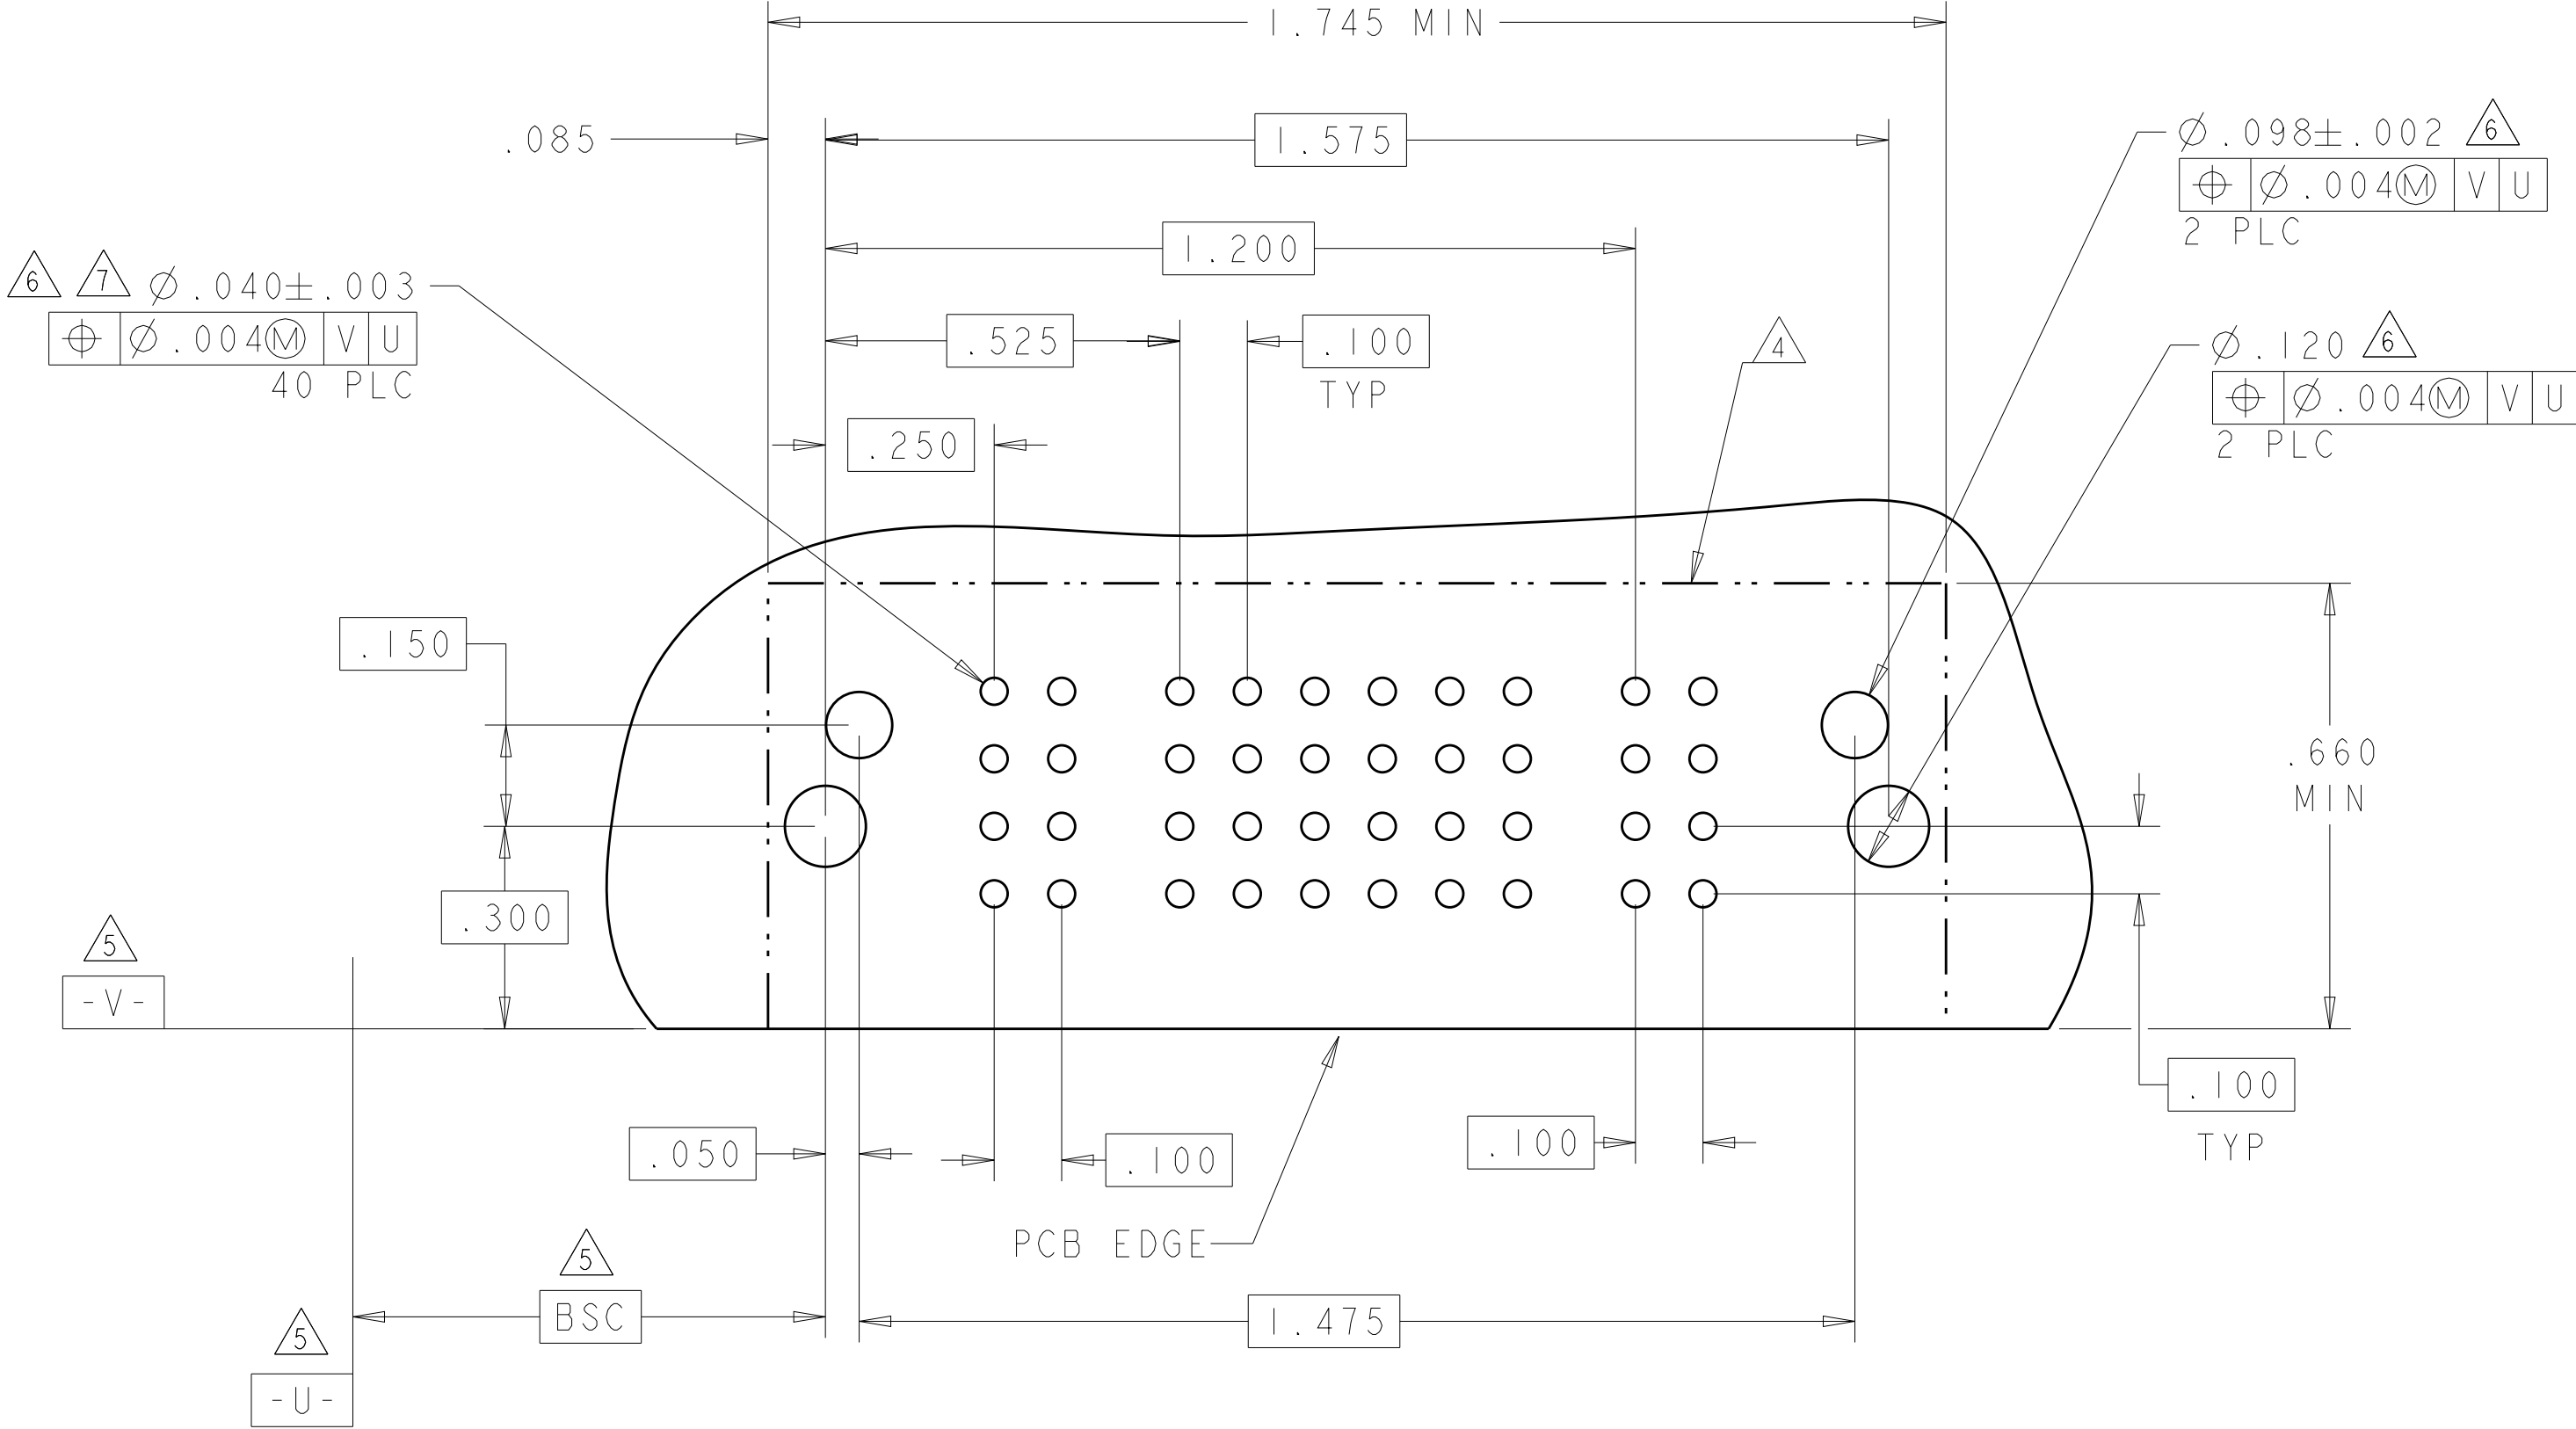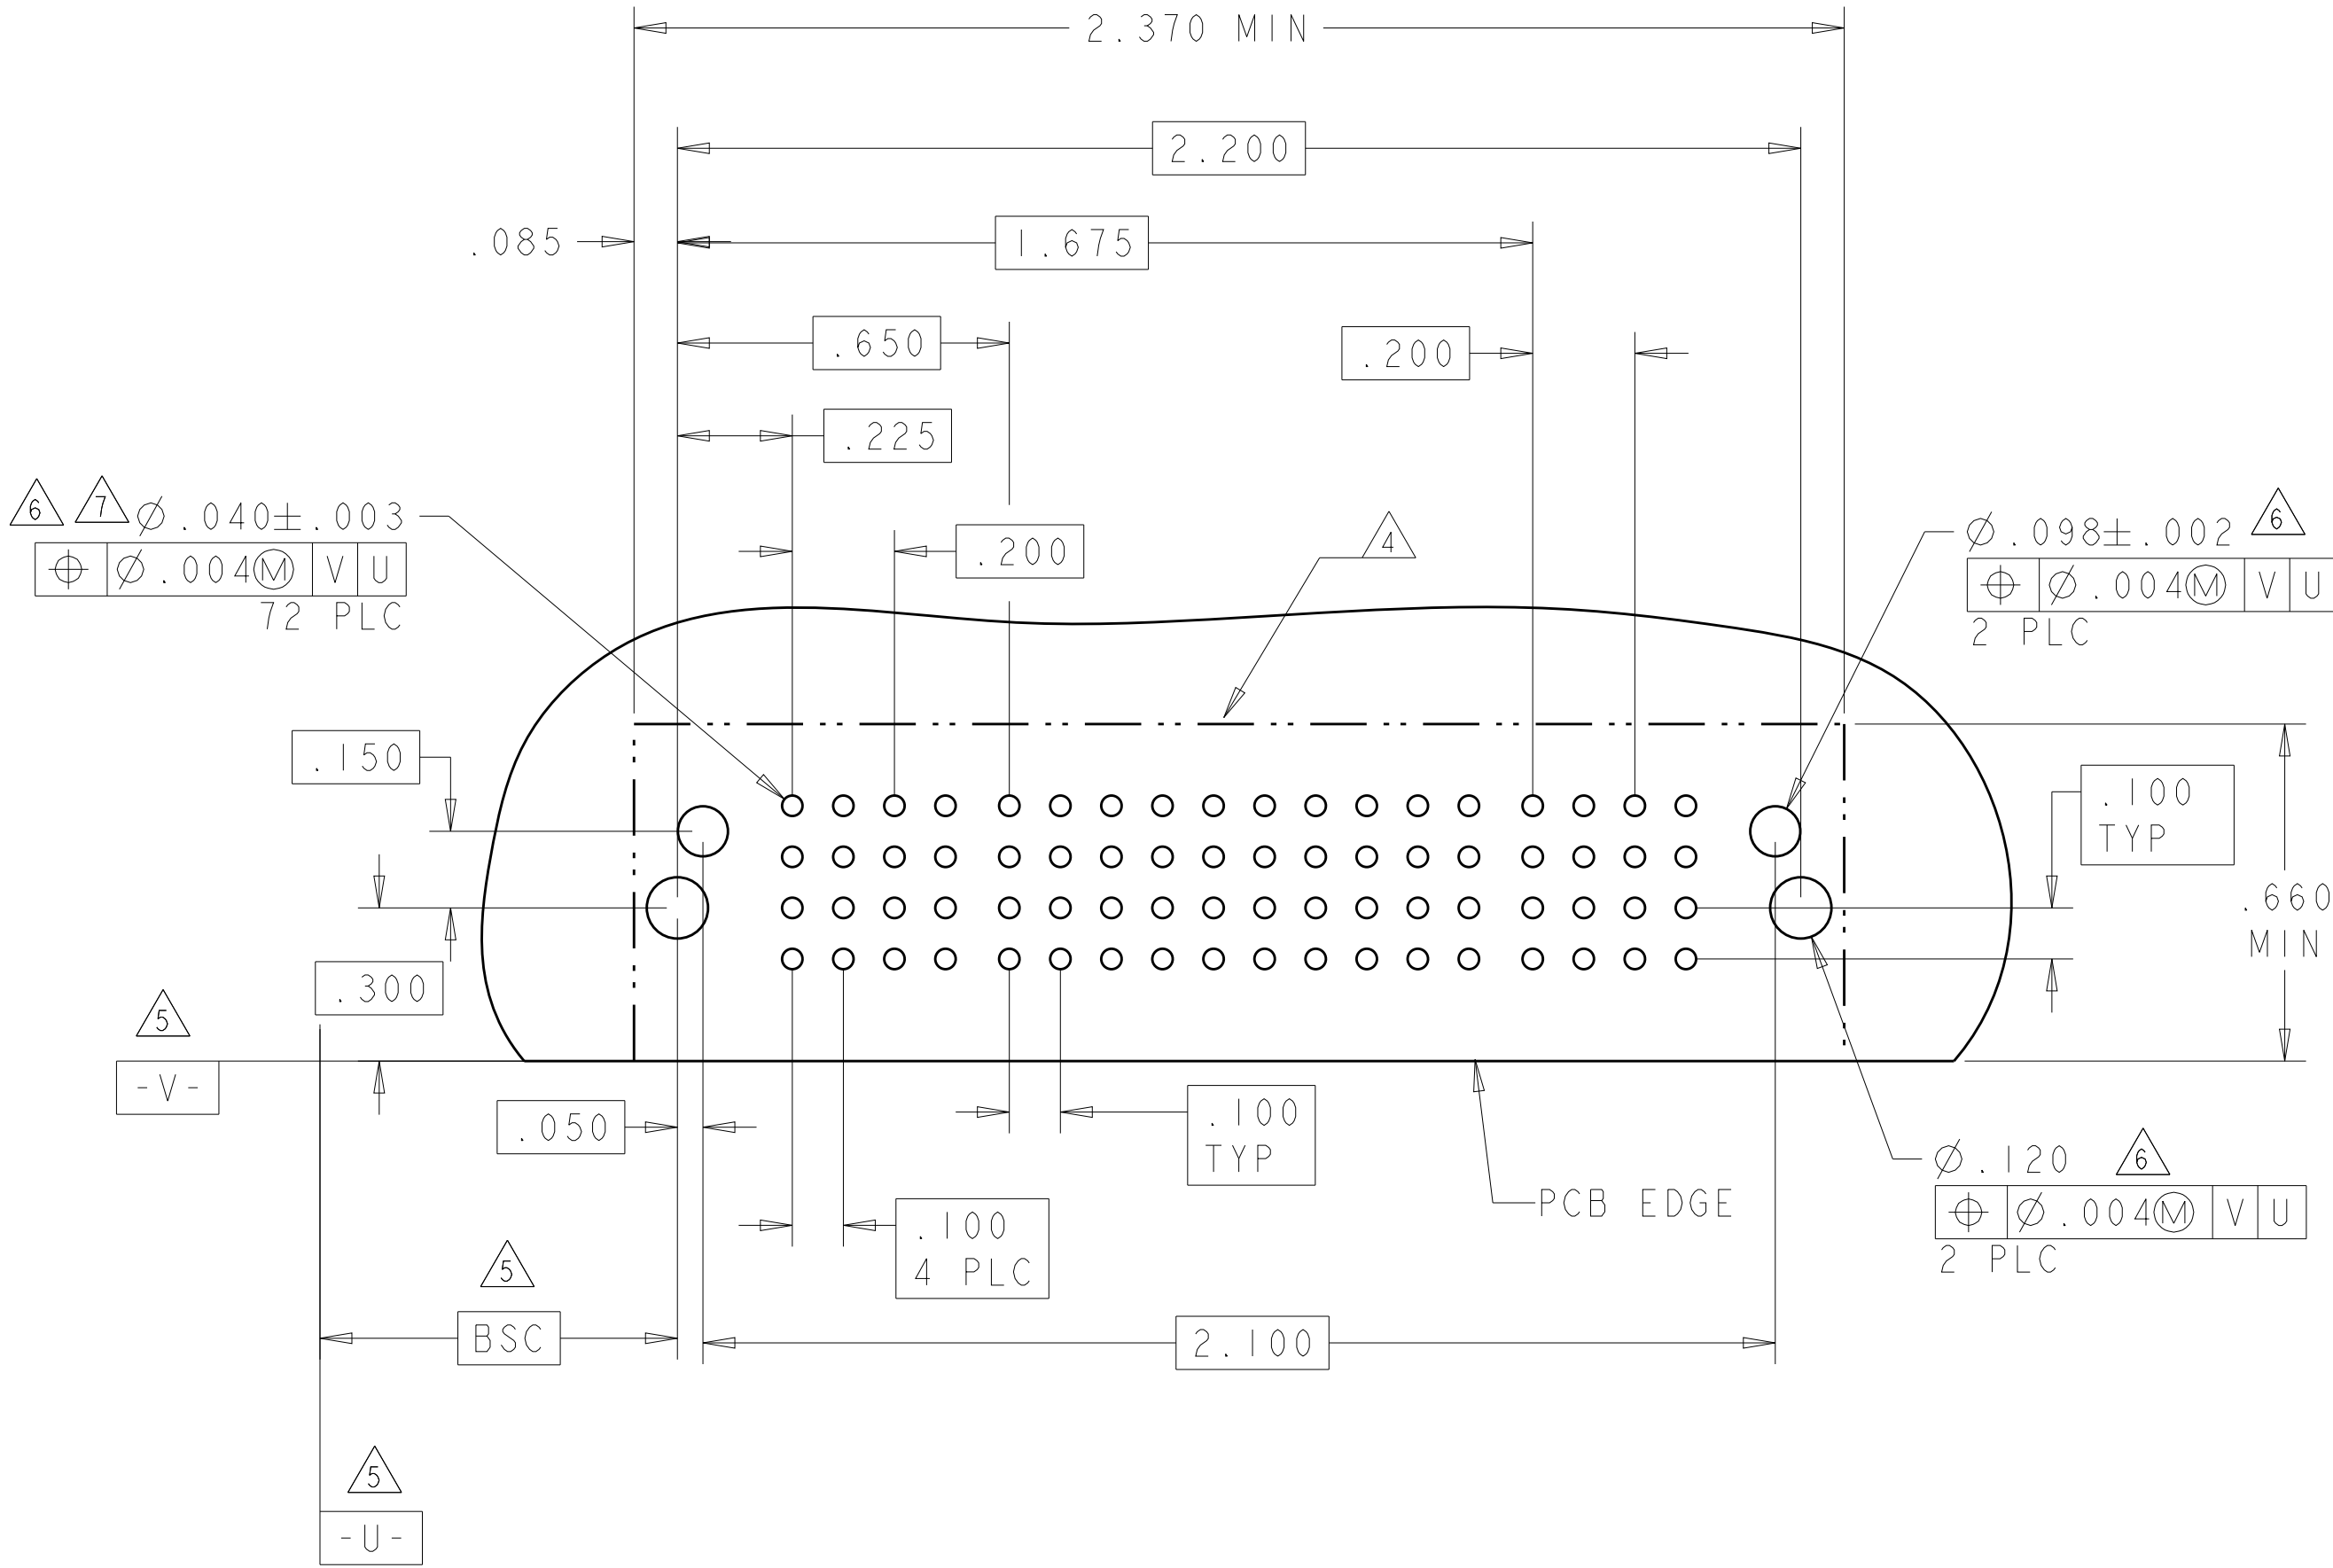

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S. ZHAO

10APR2007

CHK

S. ZHAO

10APR2007

APVD

S. ZHAO

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH

MATERIAL

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

C=6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

14

OF

42

REV



S2

TE Connectivity



LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-



PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P1	P2	1	2	3	4	P3	P4	
2-6450830-7	D		TM	TM	J	J	J	J	TM	TM	
	C				K	K	K	K			
	B				N	N	N	N			
	A	HD			S	S	S	S			HD
2P + 16S + 2P											




PART NUMBER	ROWS		POWER		SIGNAL					POWER		
			P1	P2	1	2	3	4	5	P3	P4	
2-6450830-8	D		TM	TM	J	J	J	J	J	TM	TM	
	C				K	K	K	K	K			
	B				N	N	N	N	N			
	A	HD			S	S	S	S	S			HD
2P + 20S + 2P												

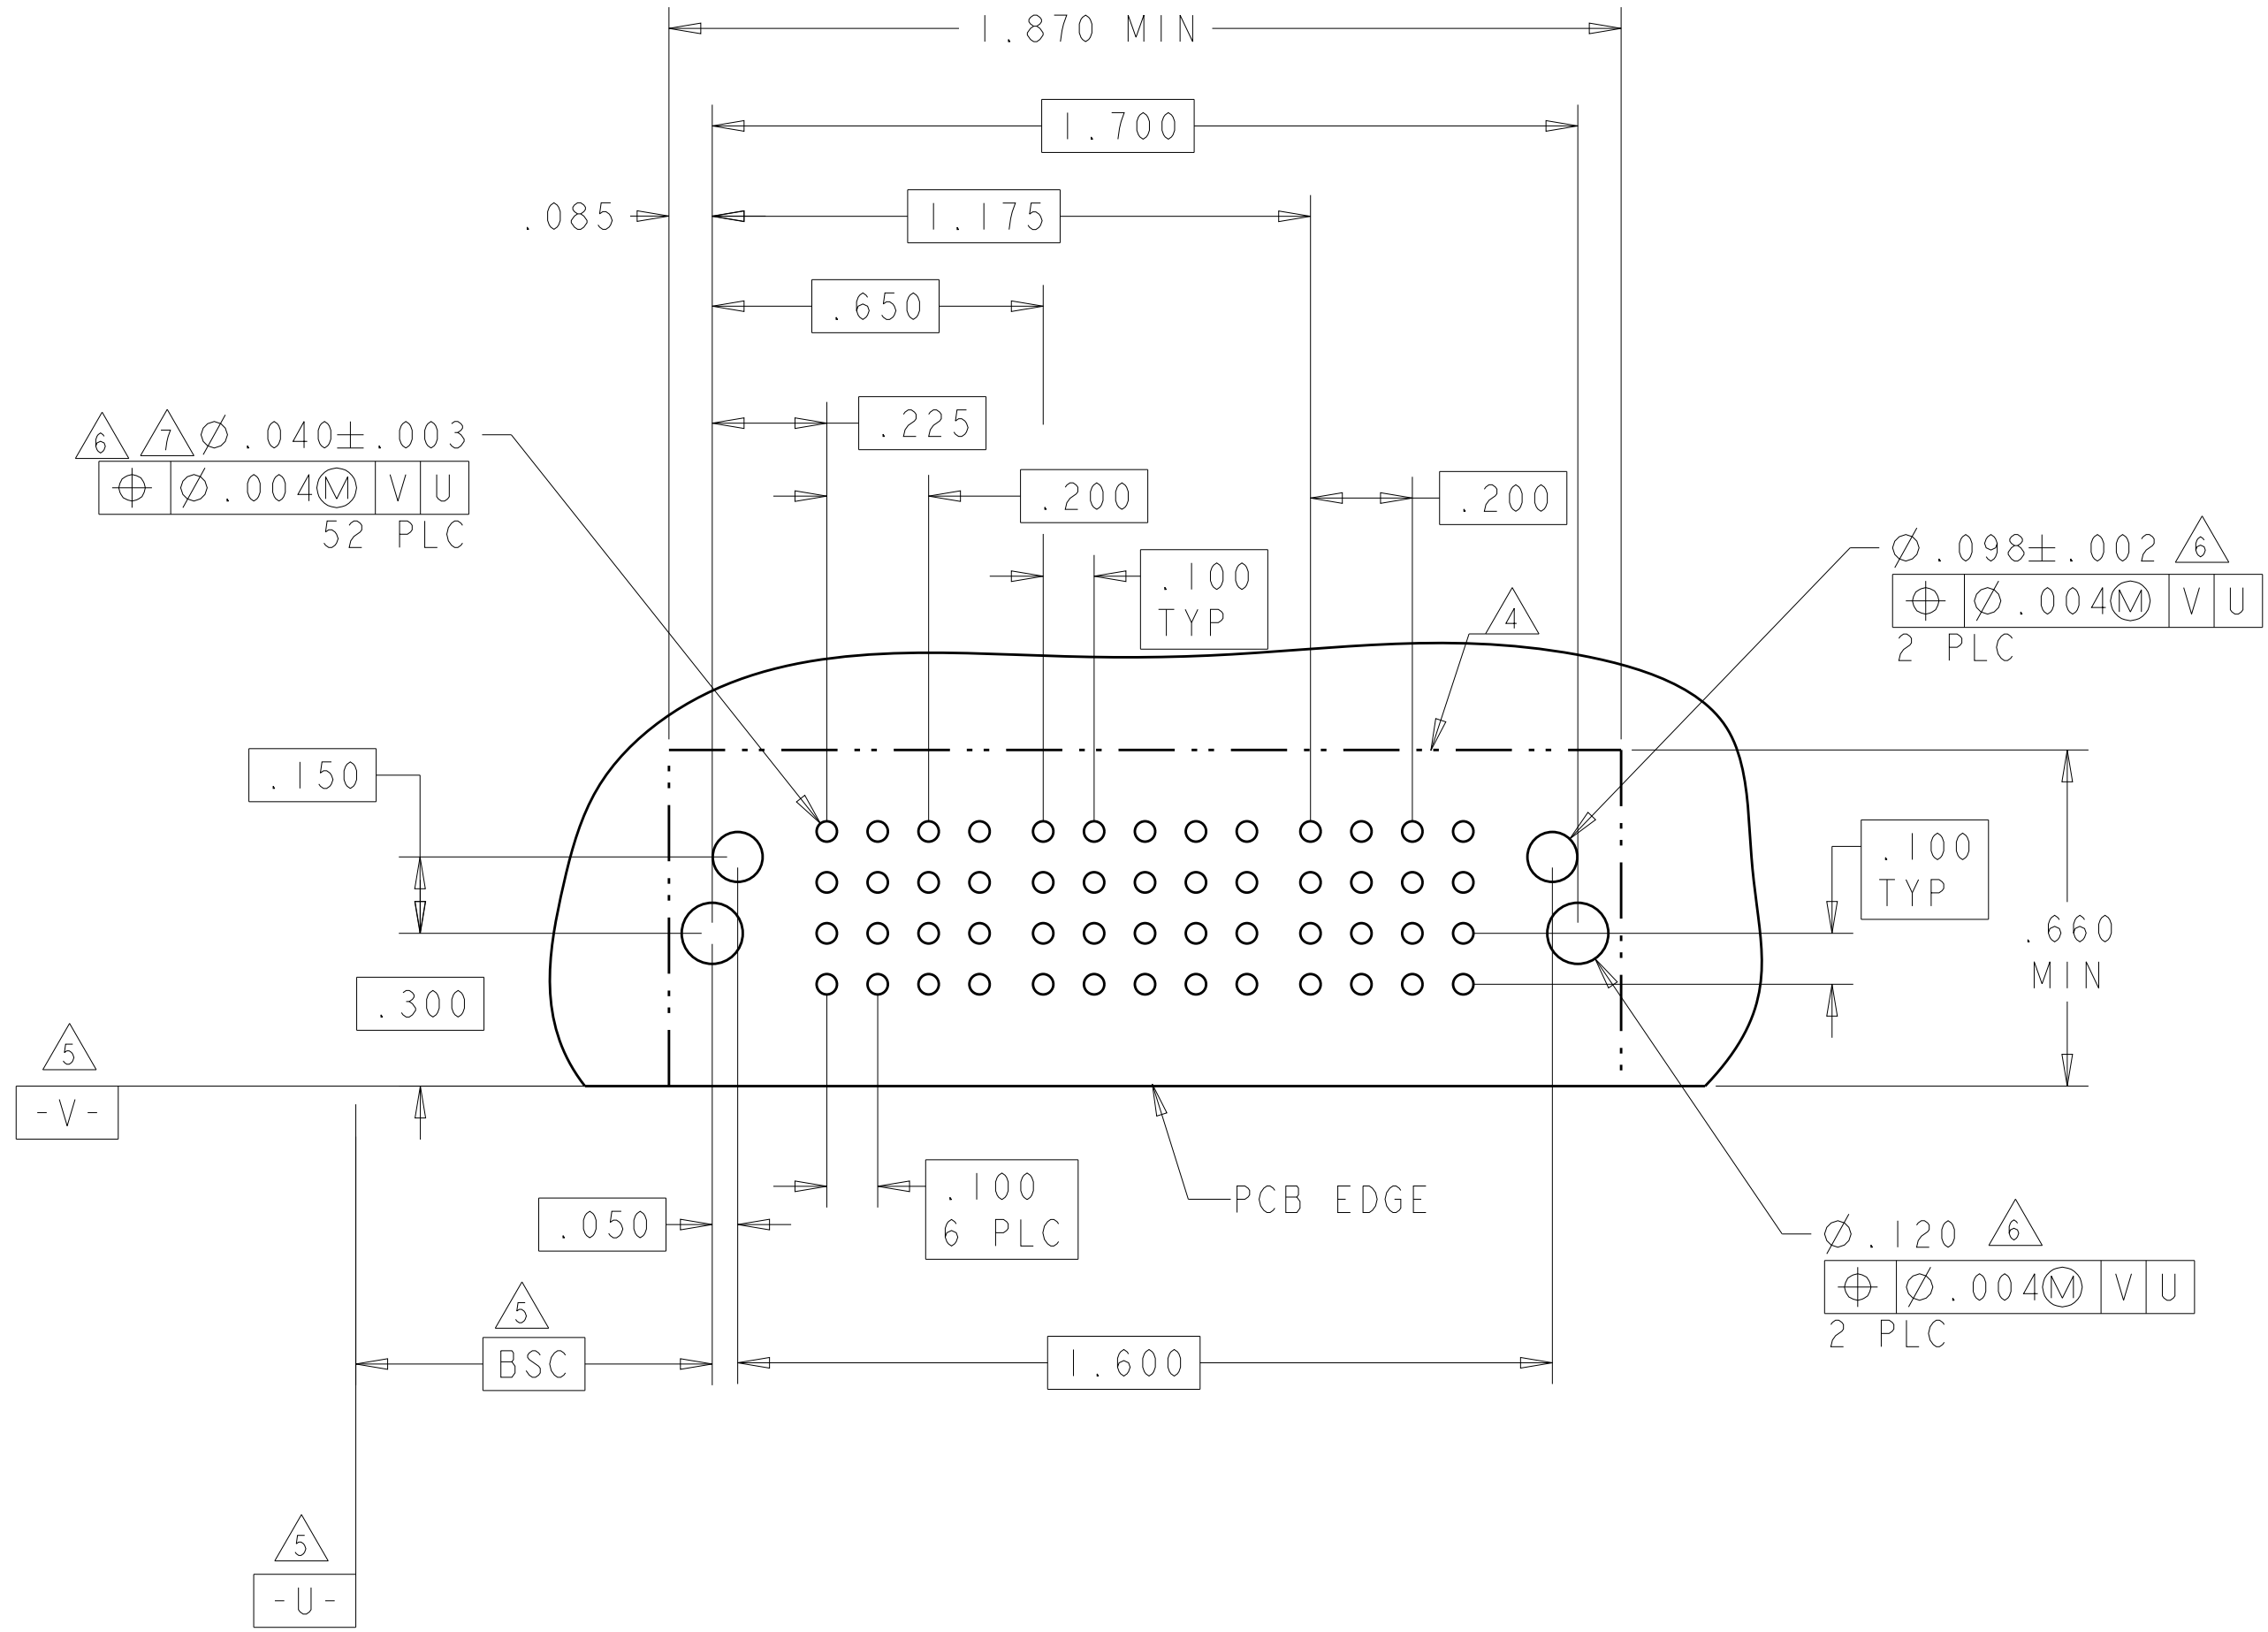
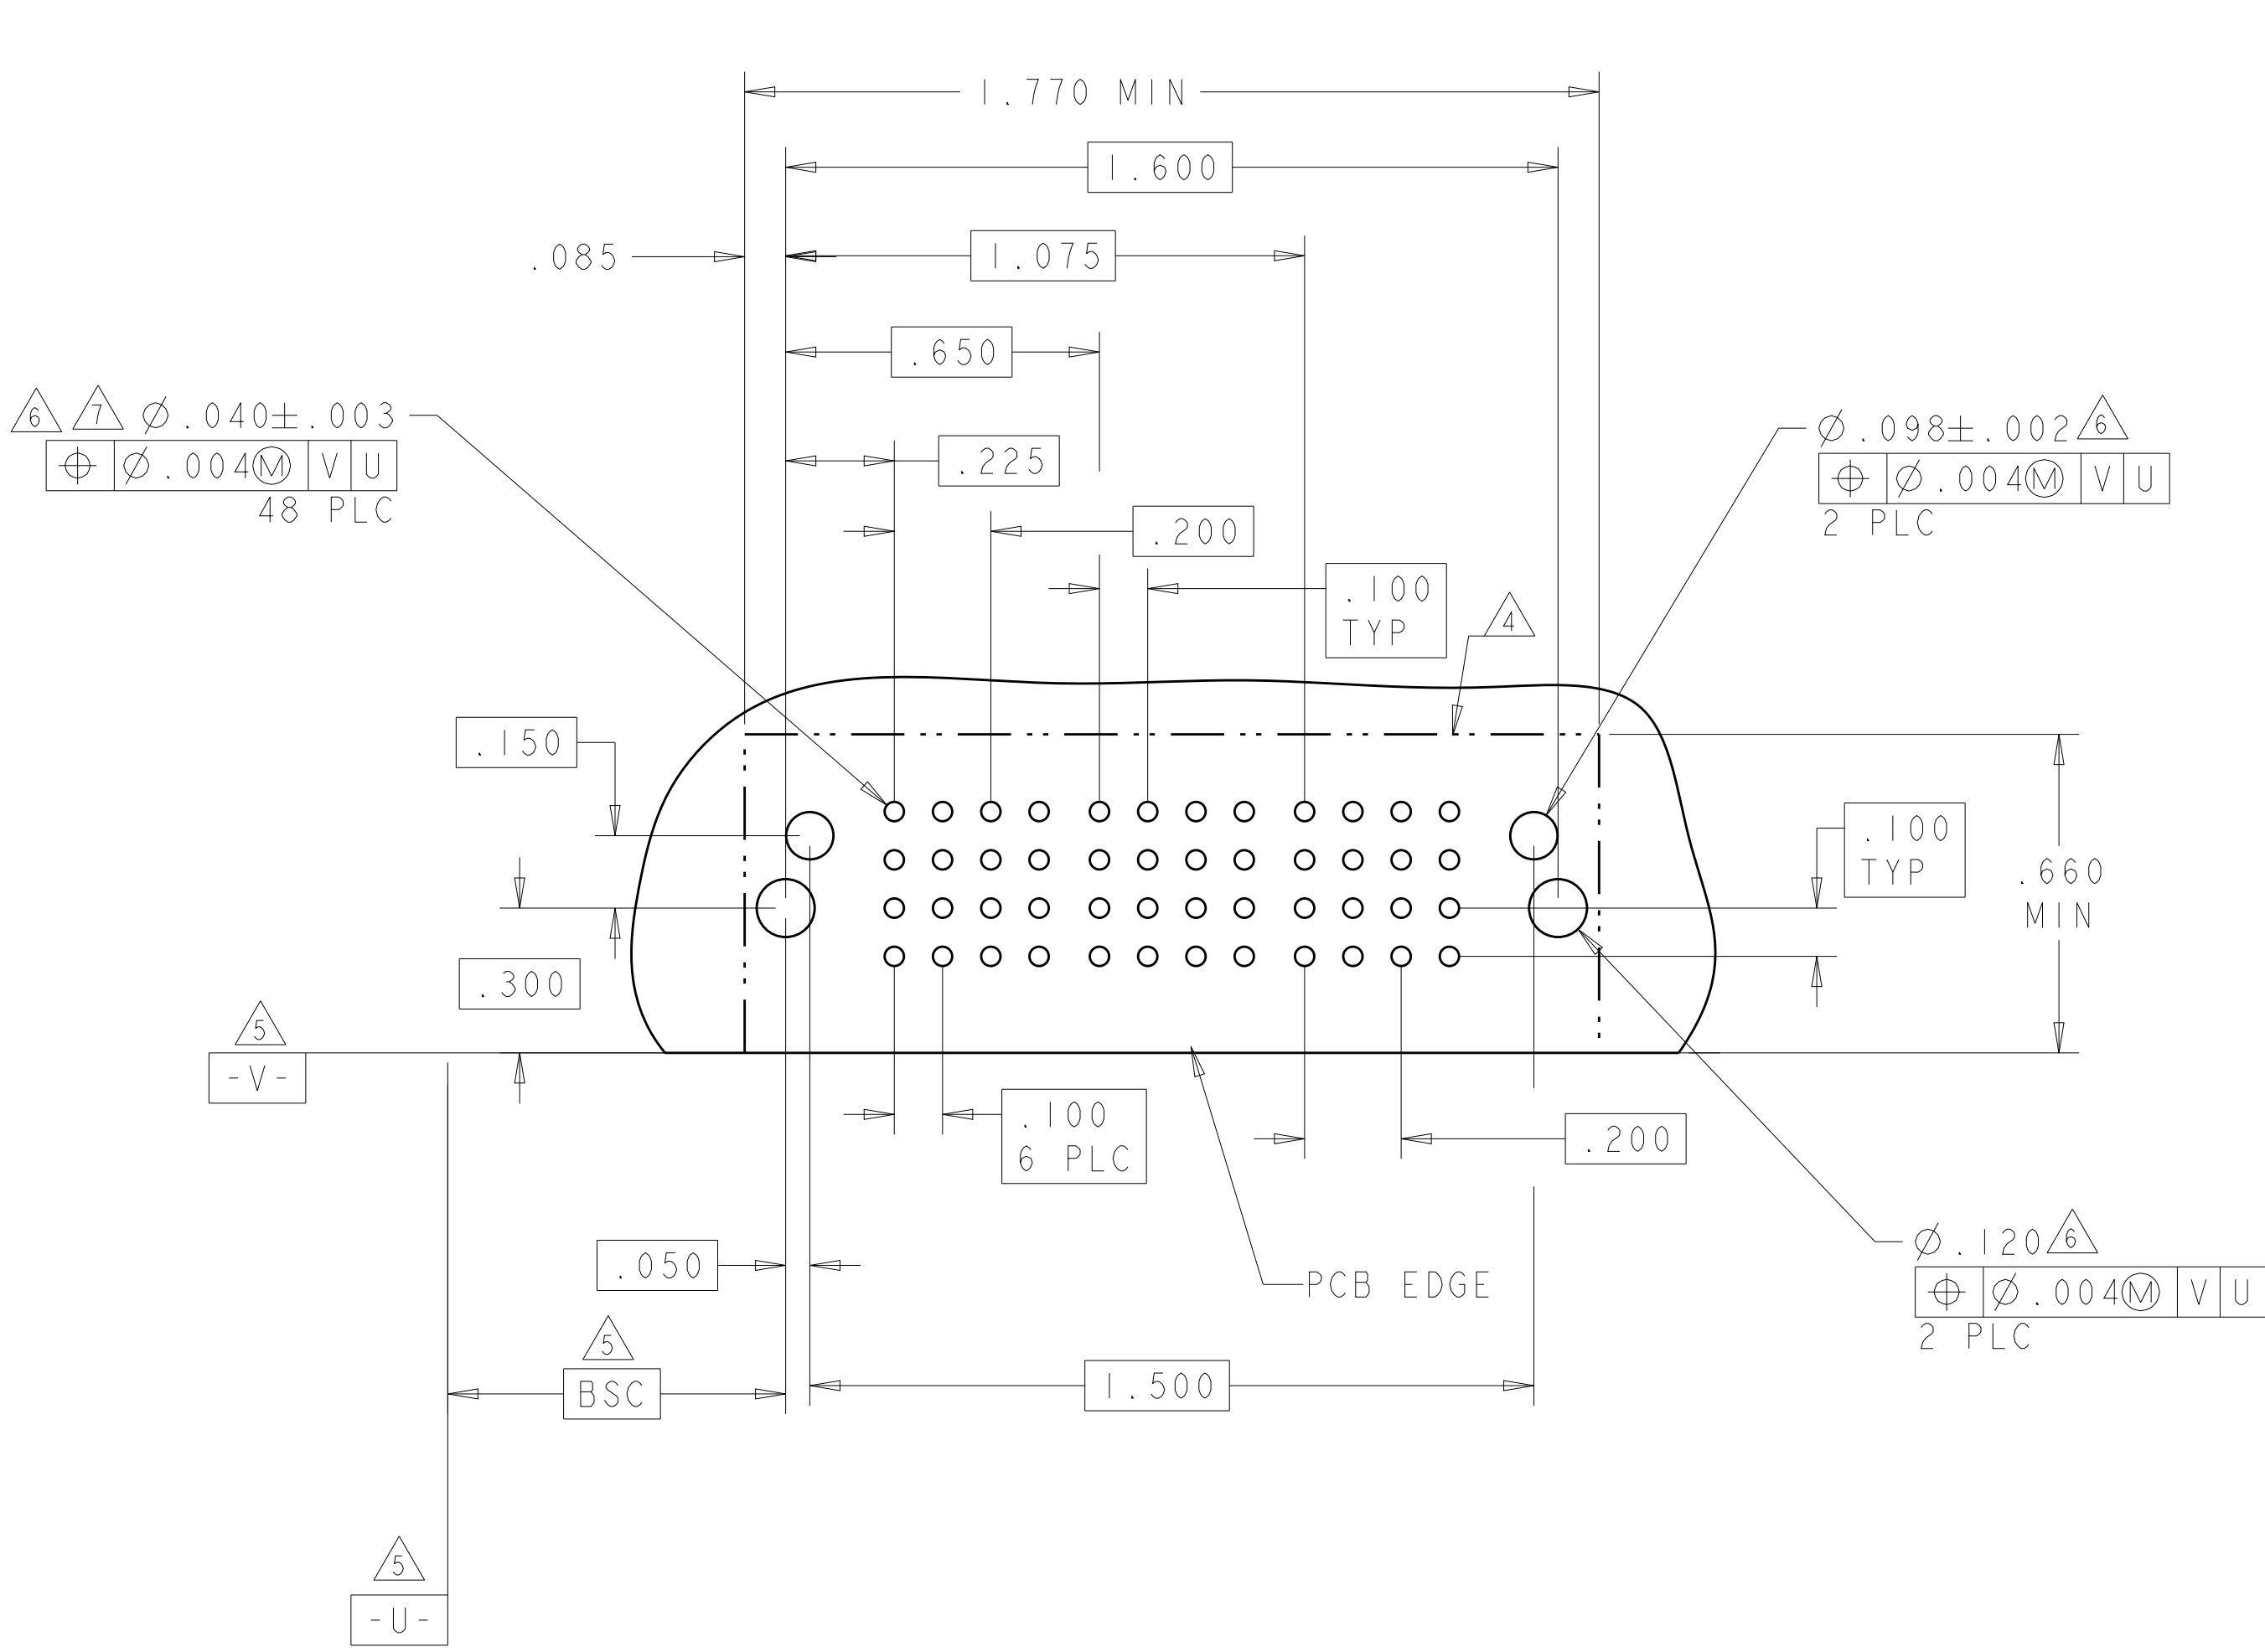



PART NUMBER	ROWS		POWER				BLANK	SIGNAL			POWER			
			P1	P2	P3	P4		1	2	3	P5	P6	P7	
3-6450830-0	D C B A						BLANK							
			TM	TM	TM	TM		FJ	J	J	TM	TM	TM	
								F	FK	K				
								N	N	N				
4ACP + 12S + 3P								S	S	S				


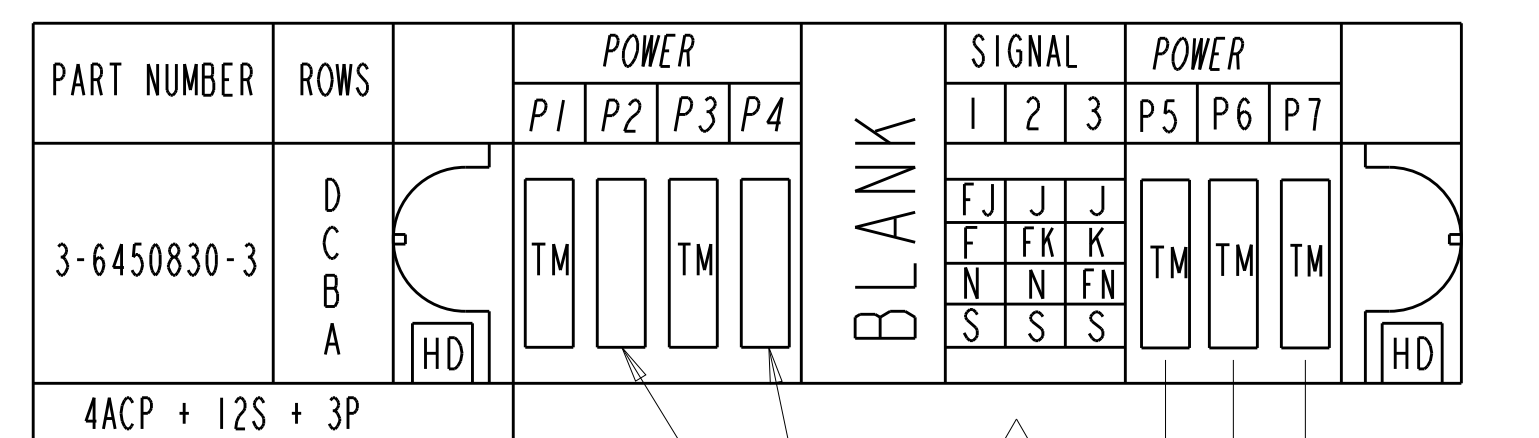
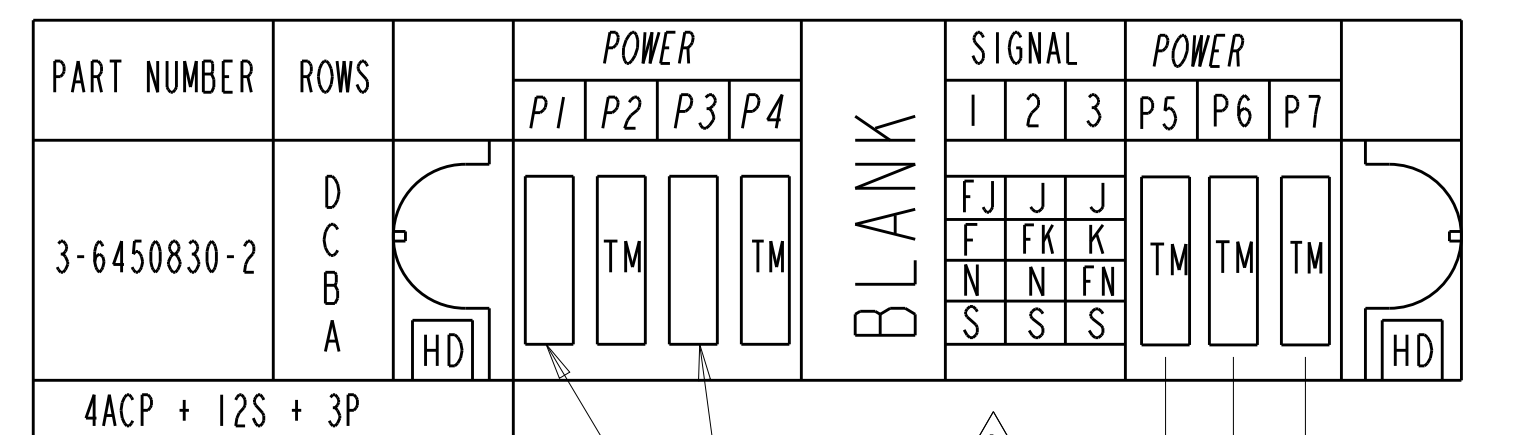
4805 (3/11)

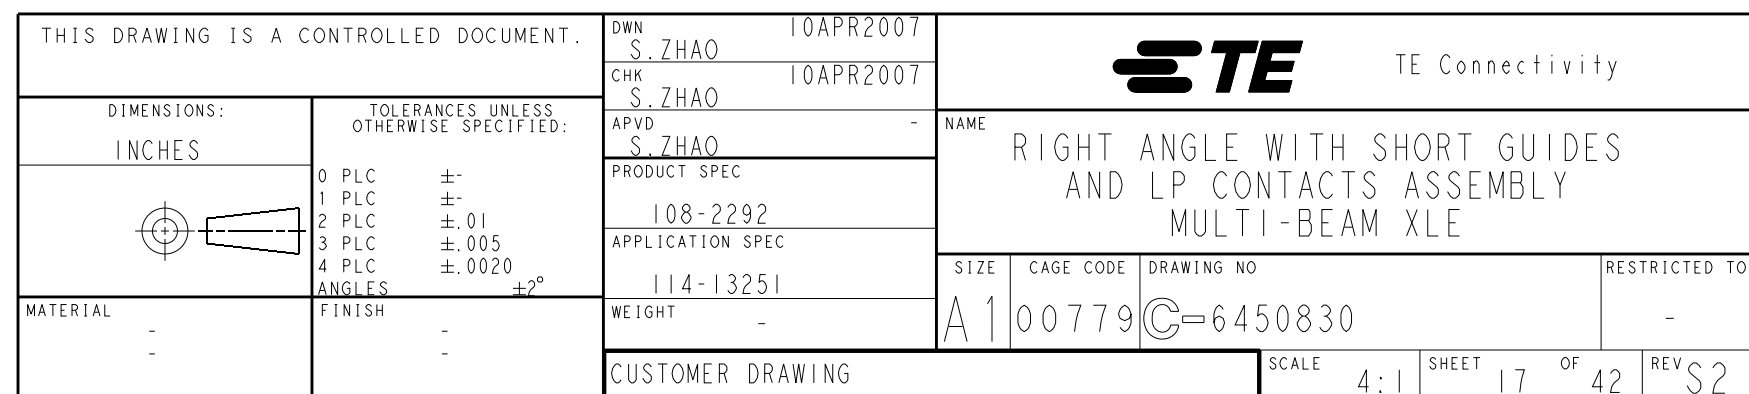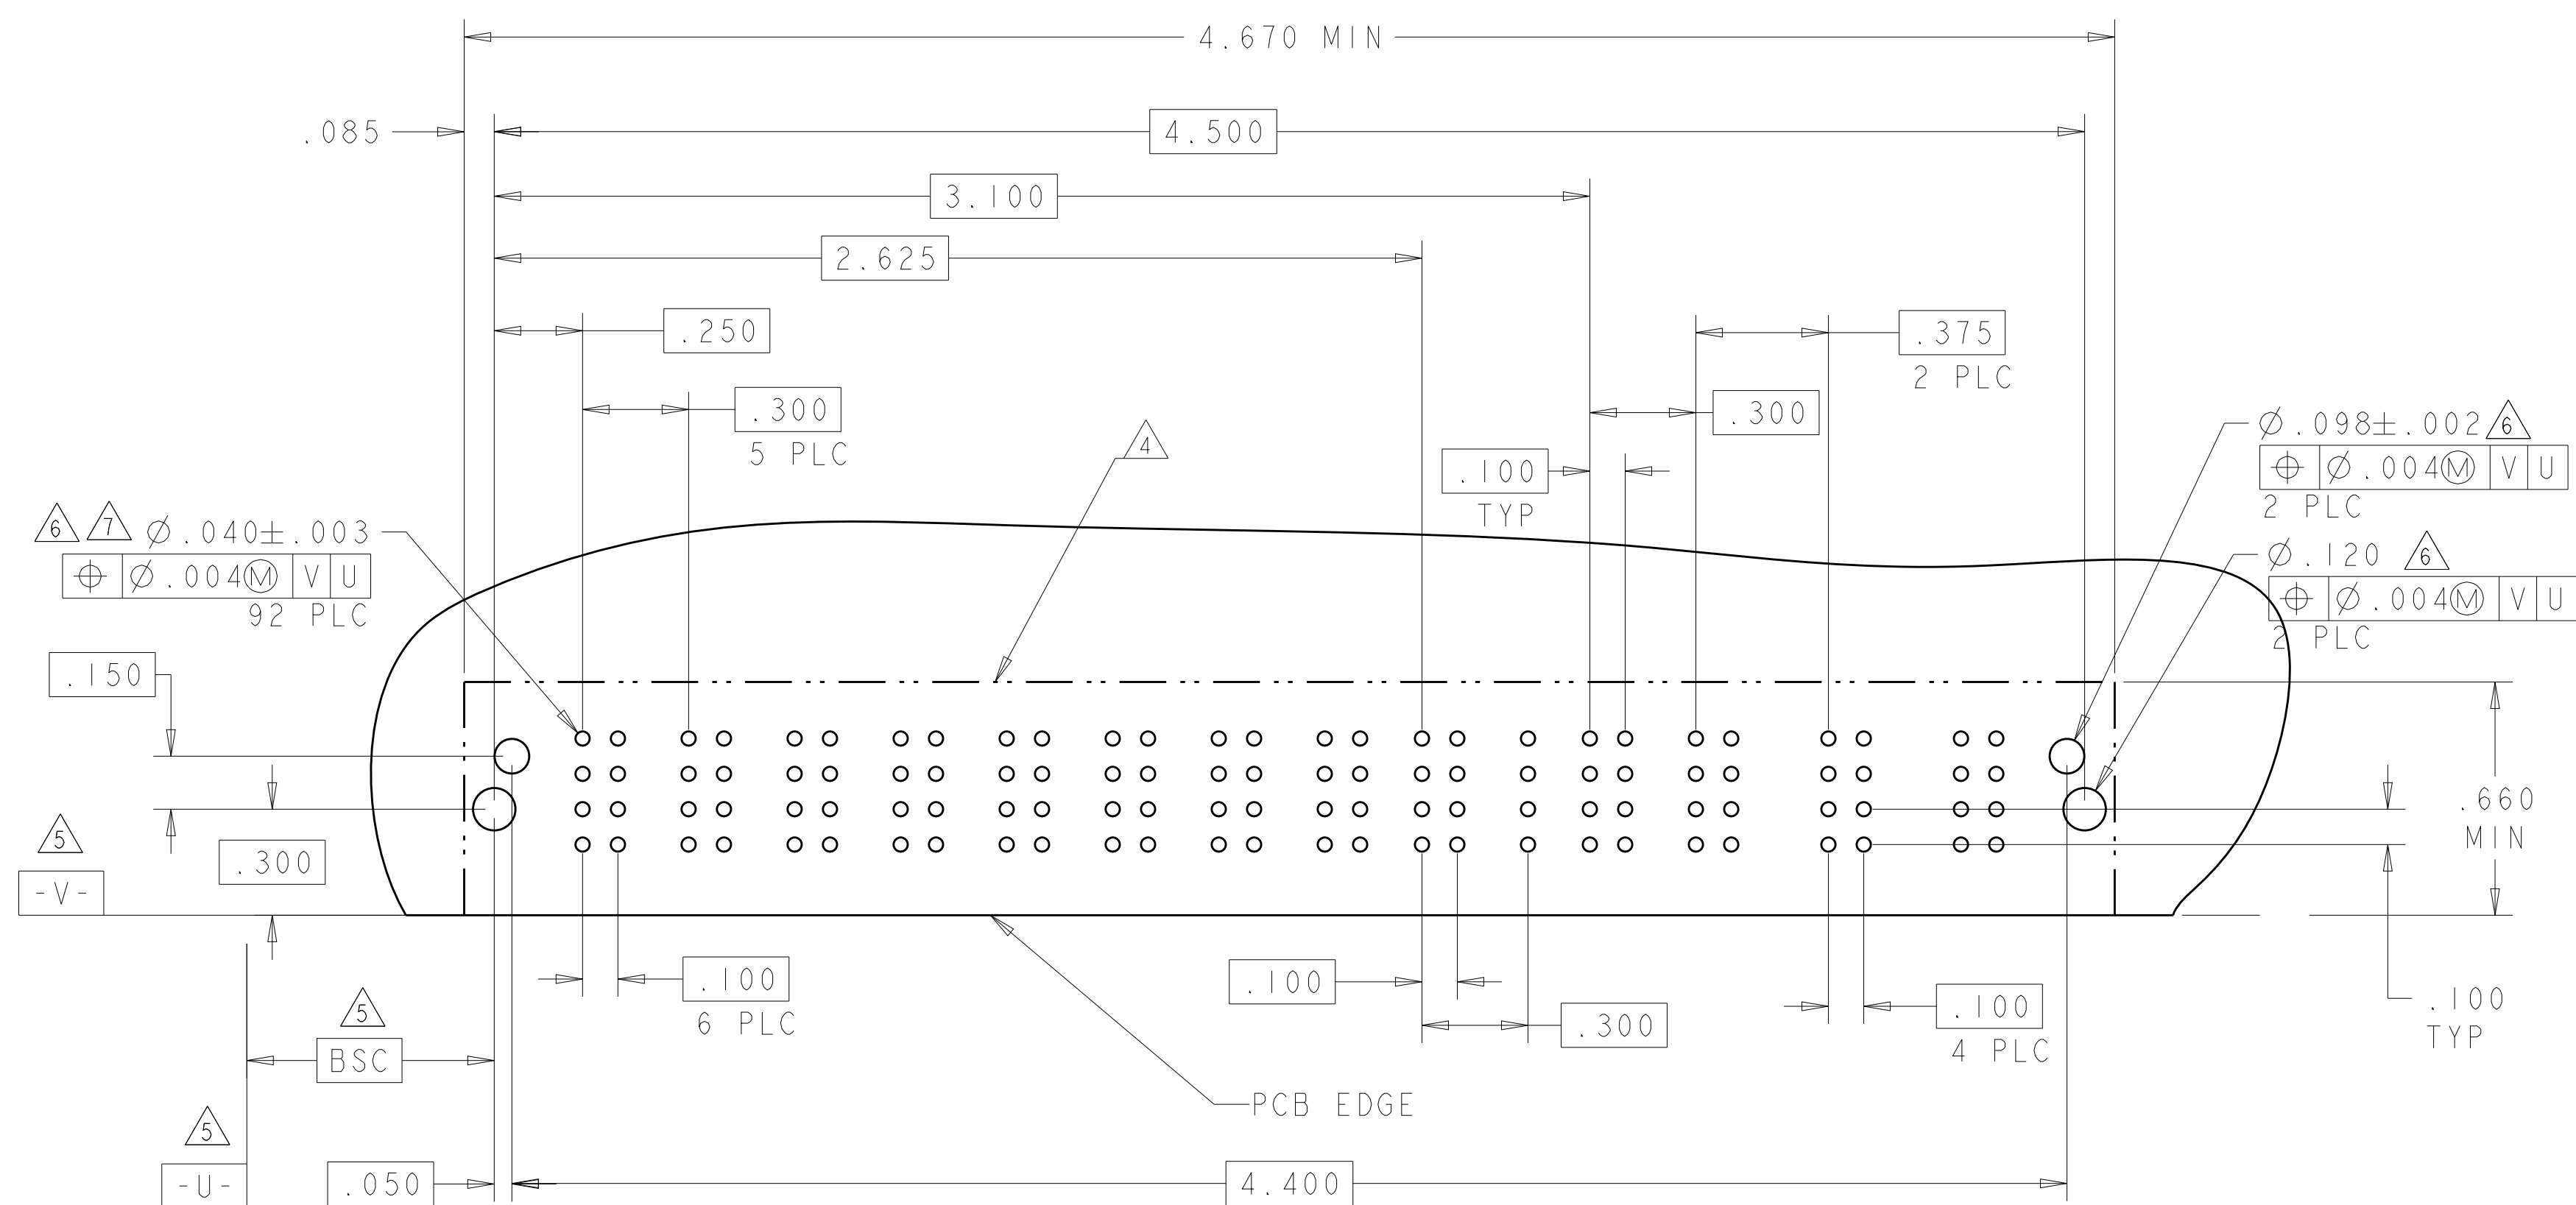
[illegible]

PART NUMBER	ROWS		POWER		SIGNAL		POWER																				
			P1	P2	1	2	LP1	LP2	LP3	LP4																	
3-6450830-6	D C B A																										
																											
																											
2ACP + 8S + 4LP																											

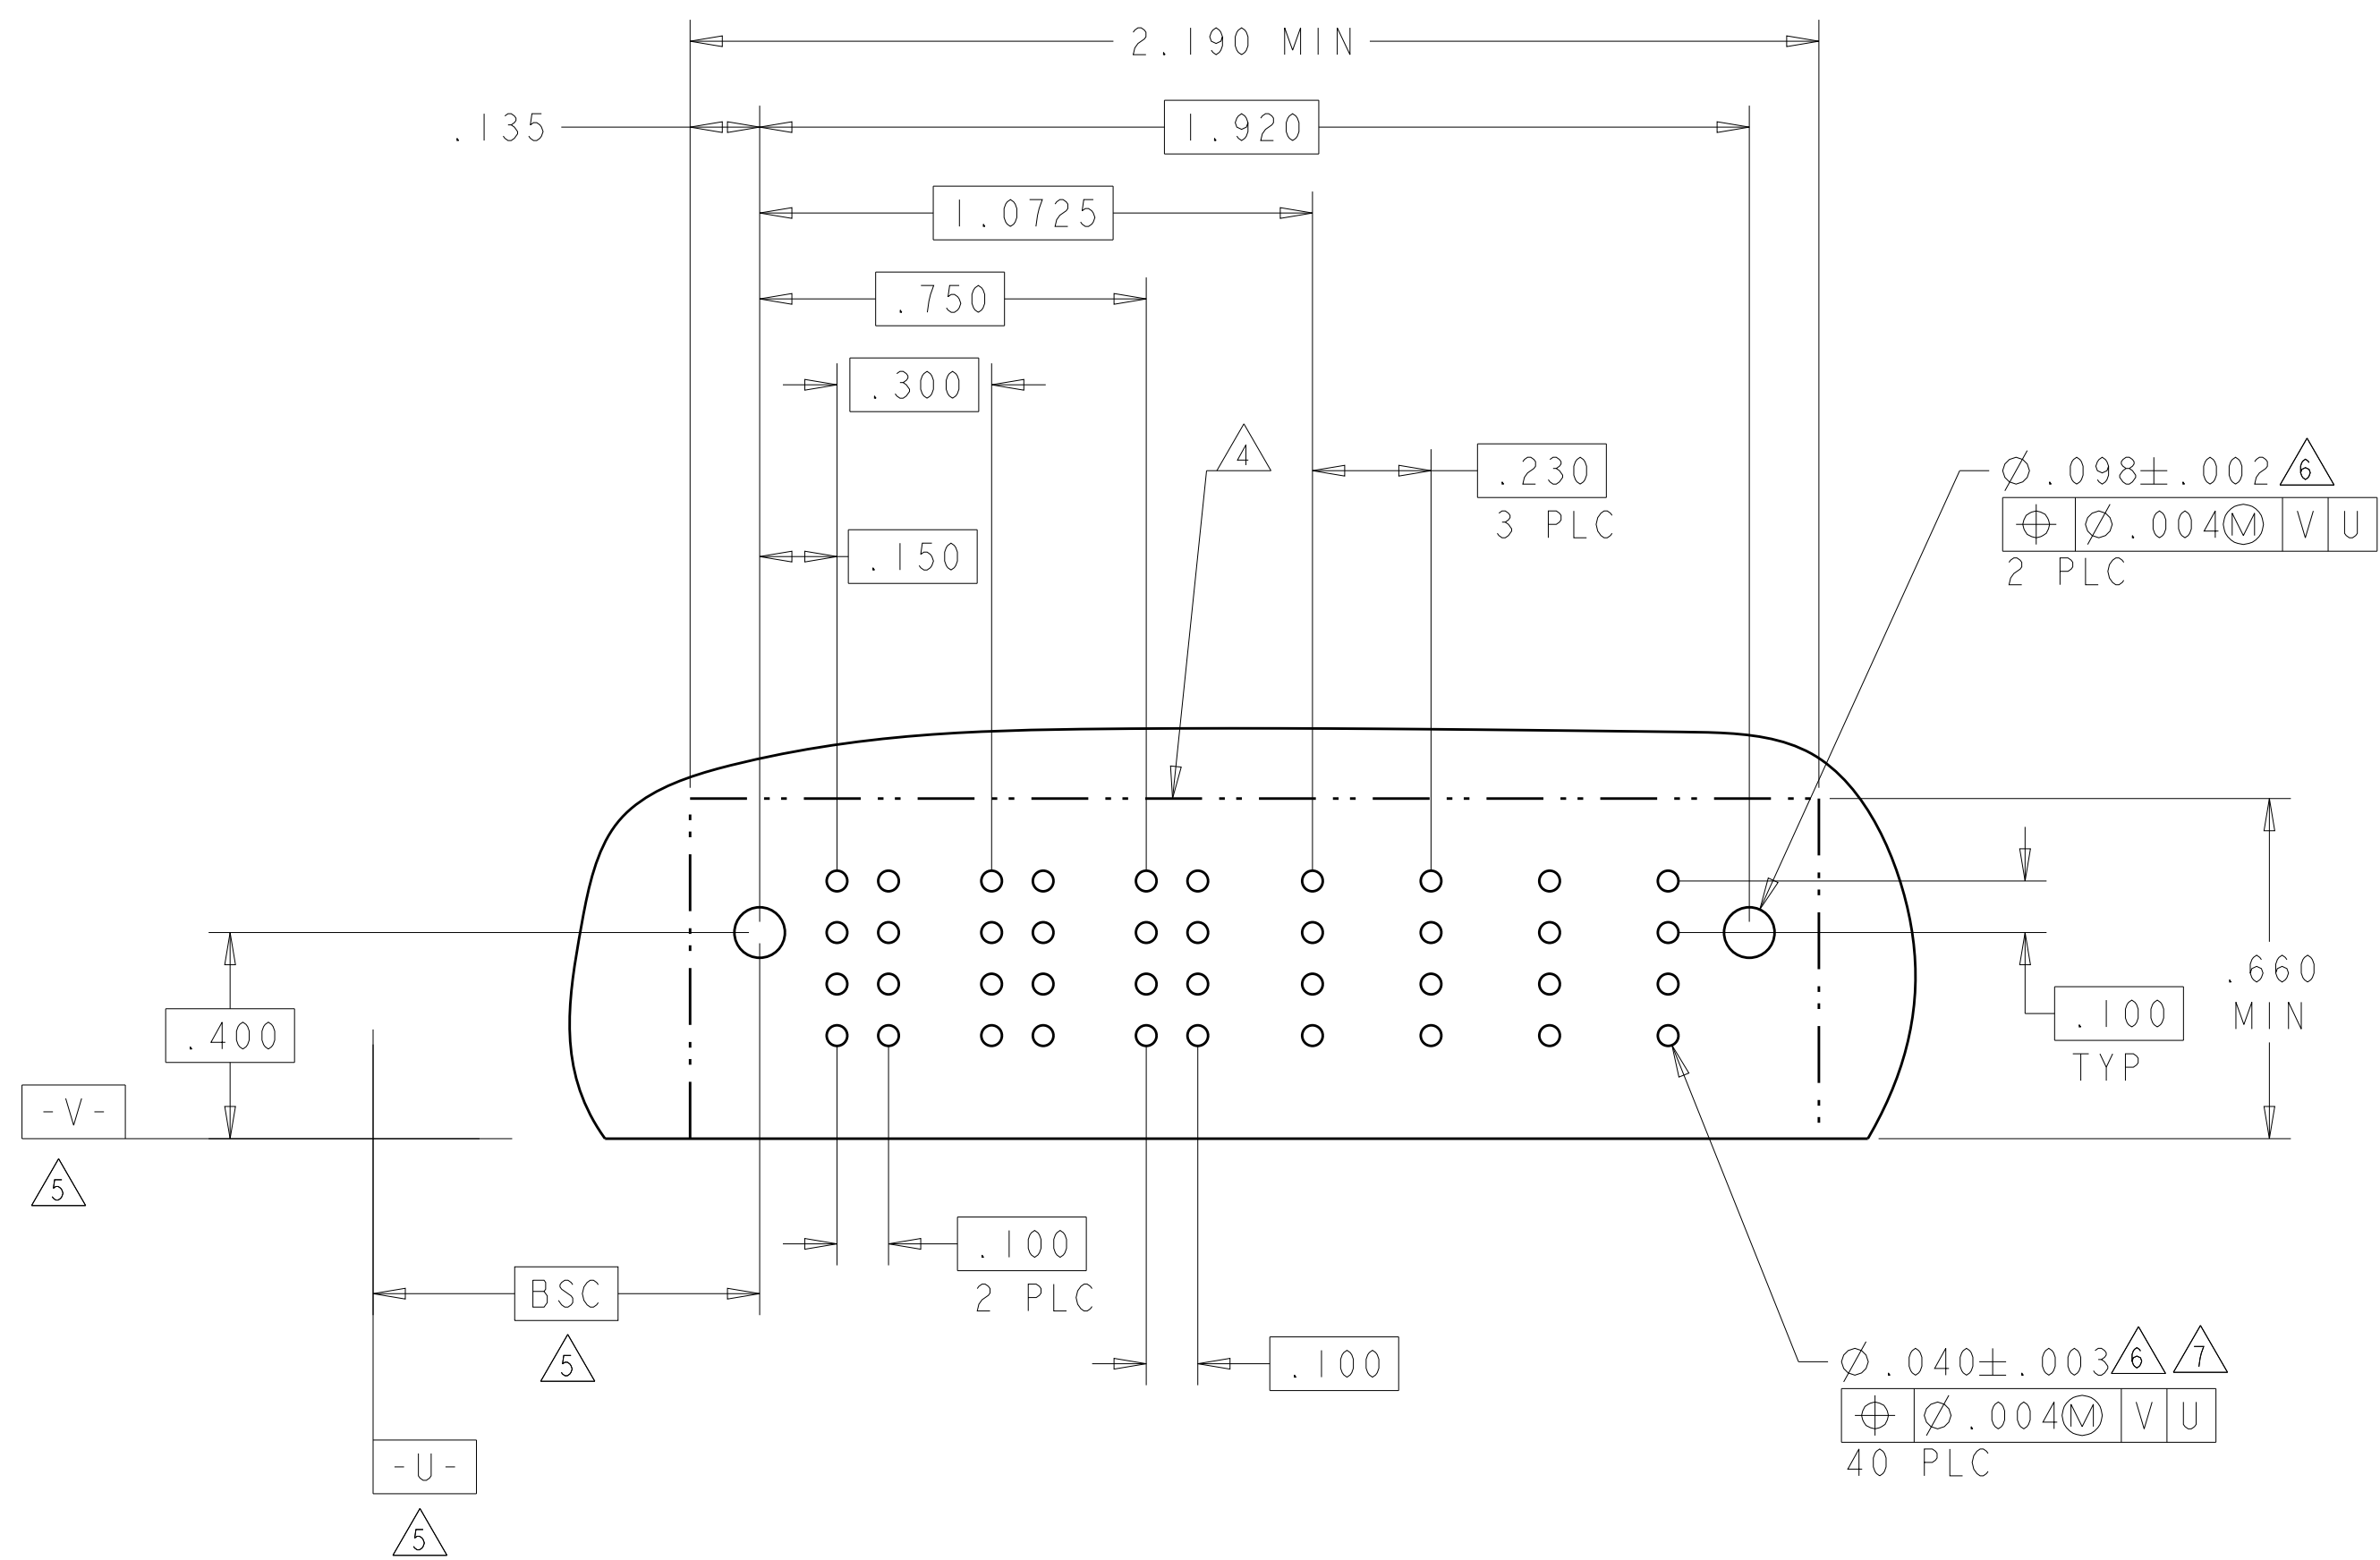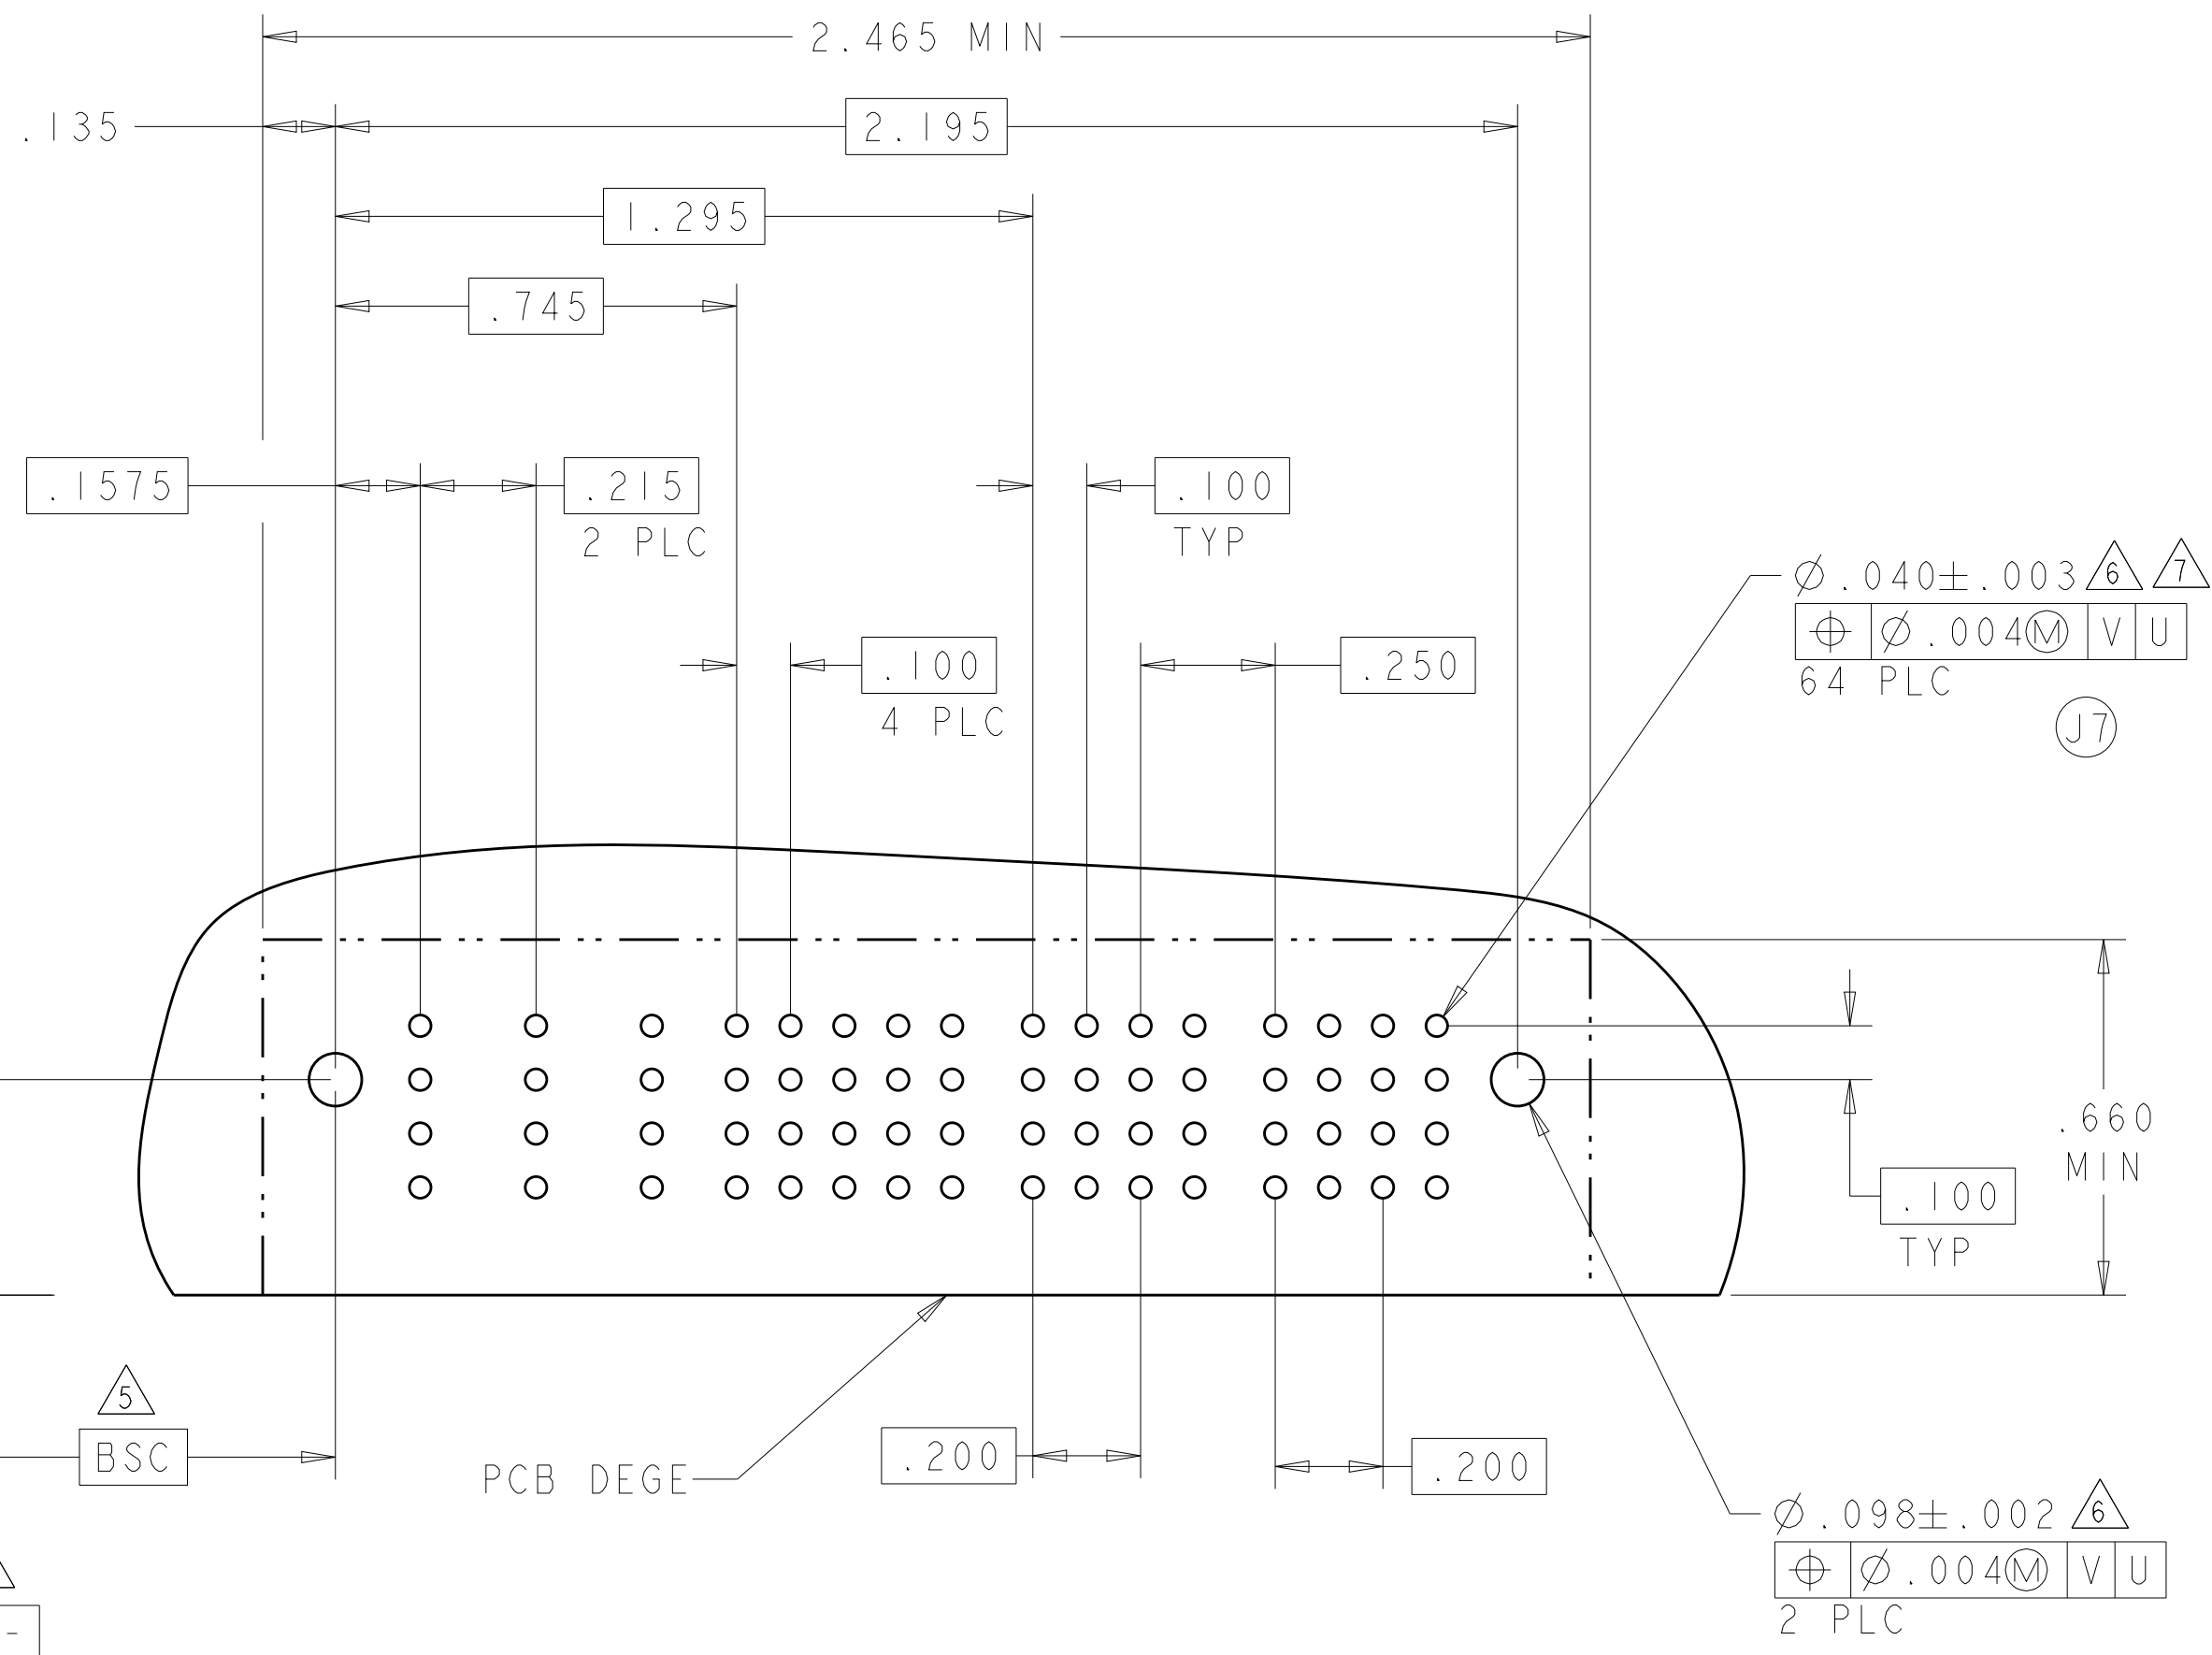


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO 10APR2007 CHG S. ZHAO 10APR2007 APP'D S. ZHAO		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		0 PLC ±.1 1 PLC ±.01 2 PLC ±.005 3 PLC ±.0020 ANGLES ±0°		PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251	
MATERIAL -		FINISH -		SIZE CAGE CODE DRAWING NO A100779 C6450830	
		WEIGHT -		RESTRICTED TO -	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 18 OF 42 REV S	

PART NUMBER	ROWS		POWER					SIGNAL			POWER				
			P1	P2	P3	P4	P5	1	2	3	P6	P7	P8	P9	
3-6450830-8	D C B A						J K N S	J K N S	J K N H						
5ACP + 12S + 4ACP															

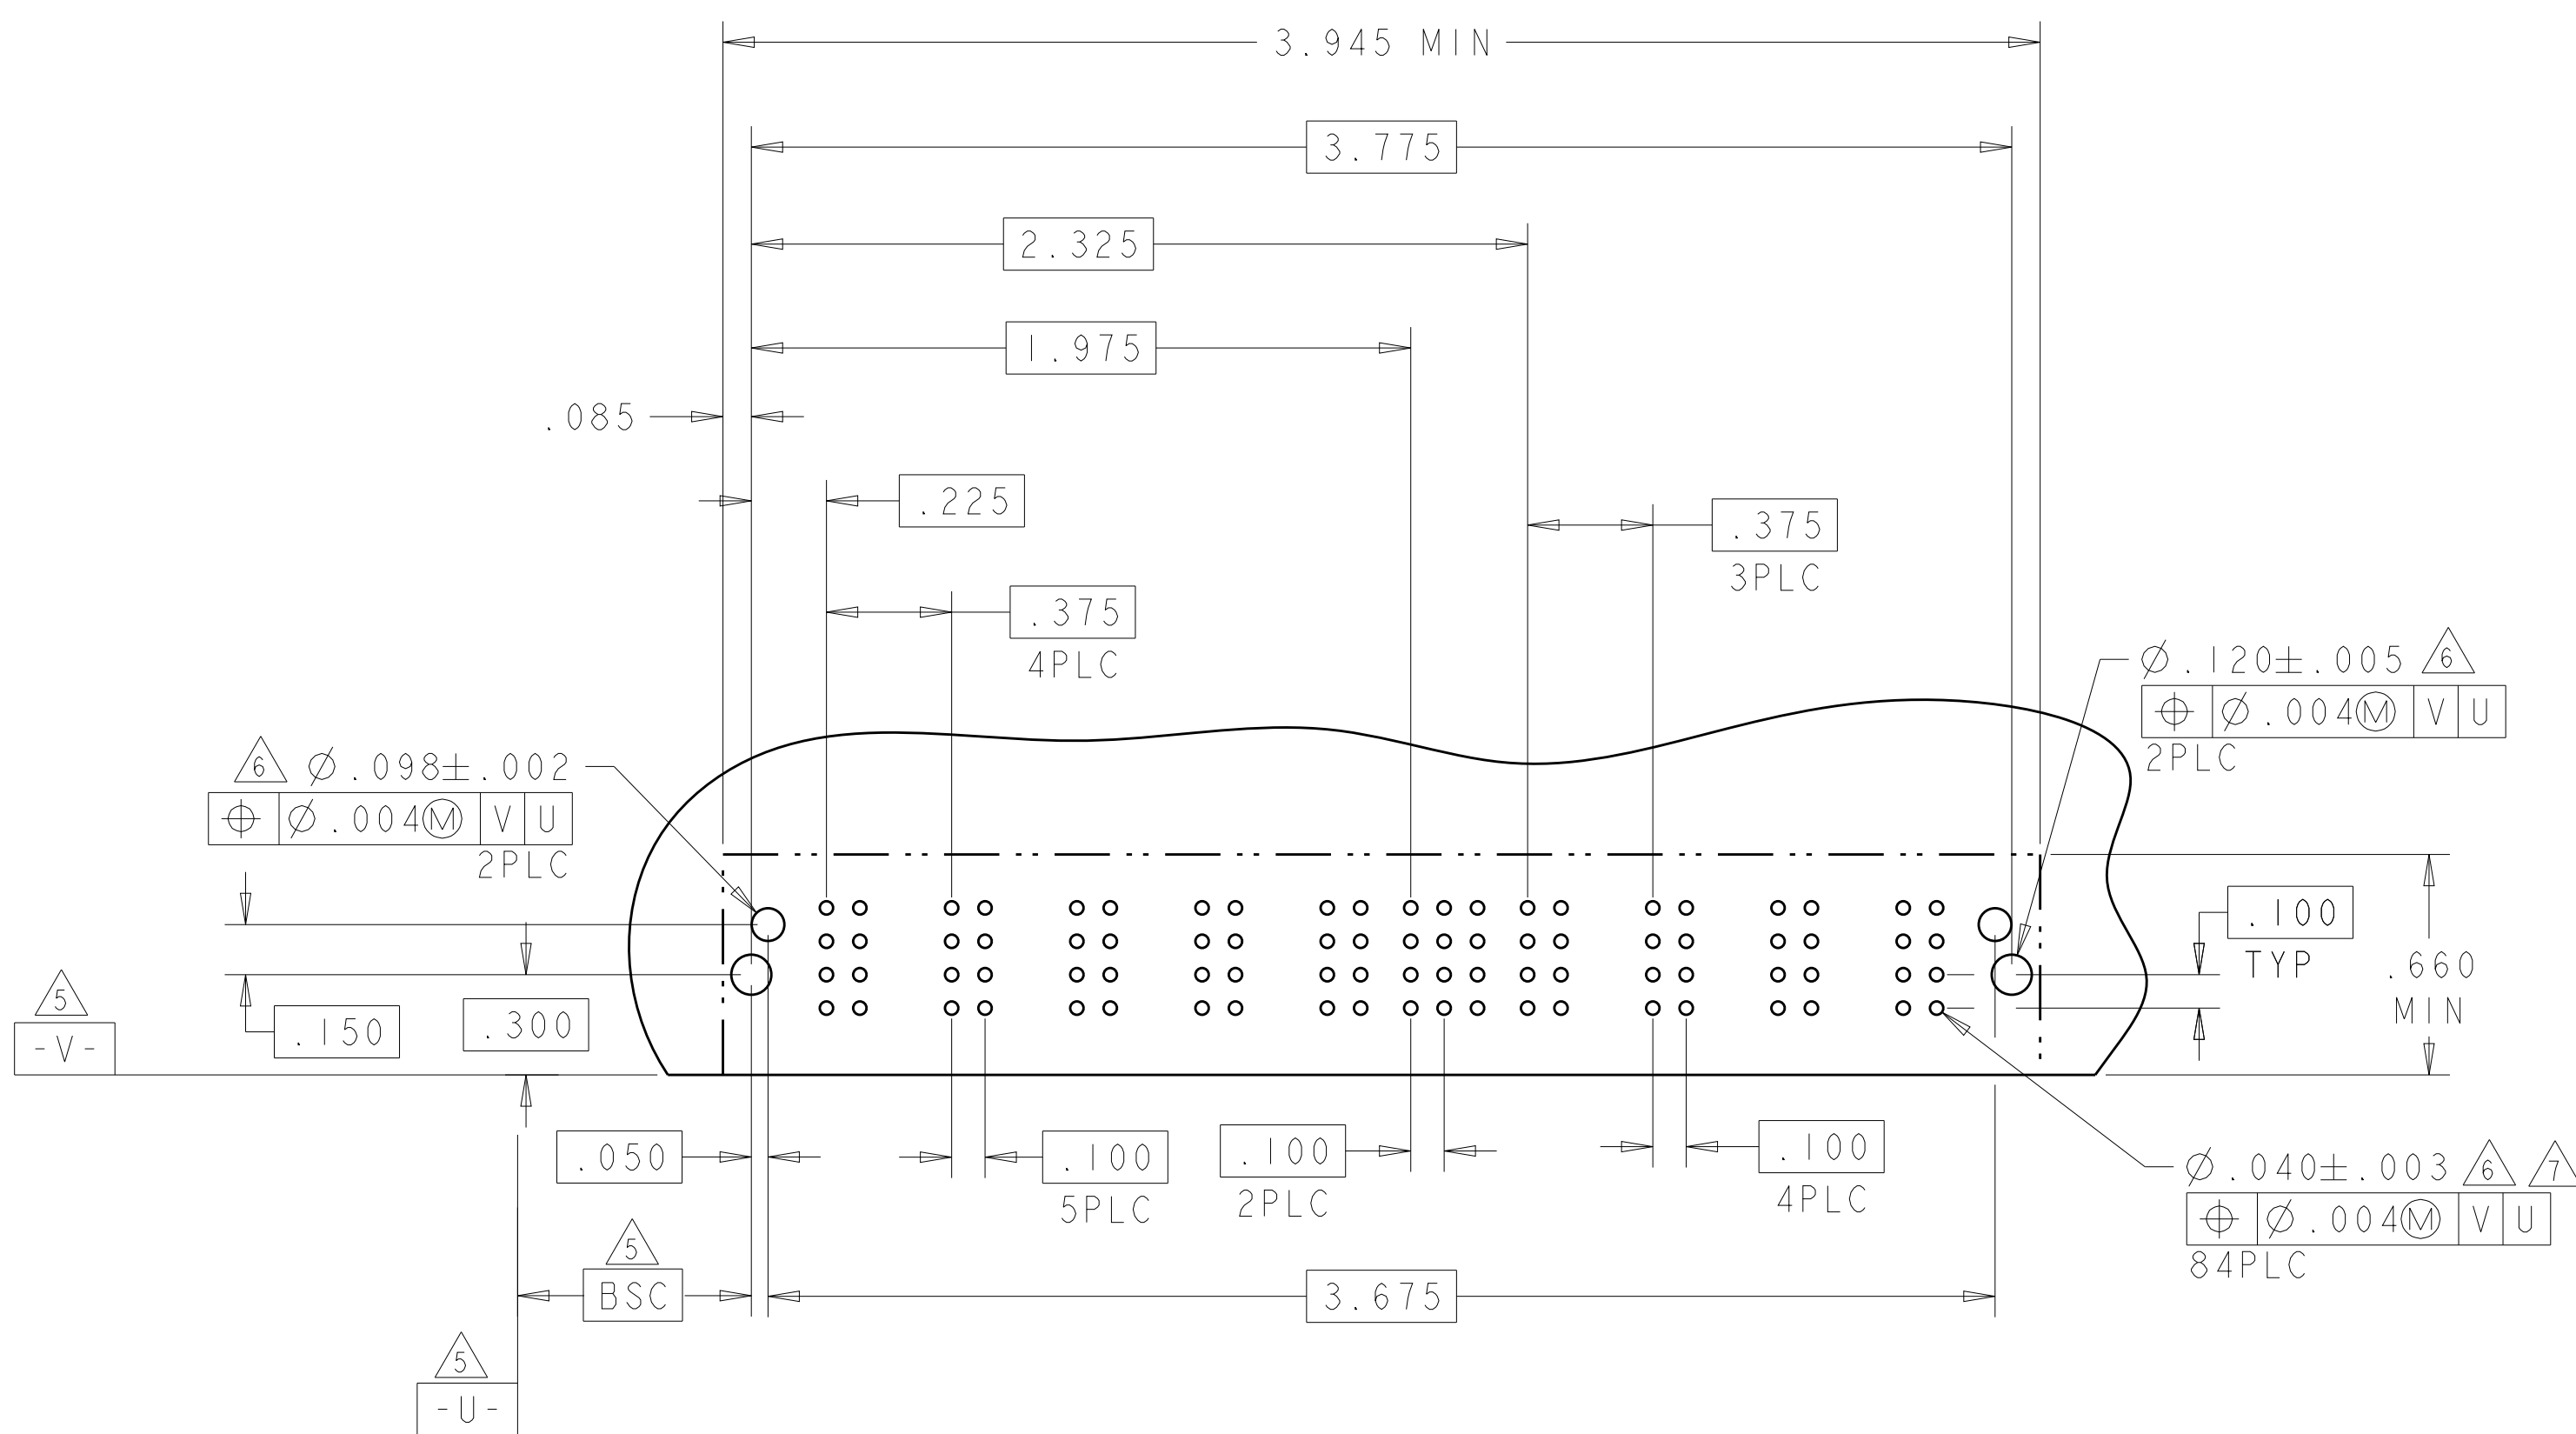


PART NUMBER	ROWS		LOW POWER		SIGNAL				LOW POWER		
			LP1	LP2	I	2	3	4	LP3	LP4	
6-6450830-0	D		LM	LM	J	J	J	E	LM	LM	
	C				K	K	K	K			
	B				N	N	N	N			
	A				S	S	S	S			
2LP + 16S + 2LP											

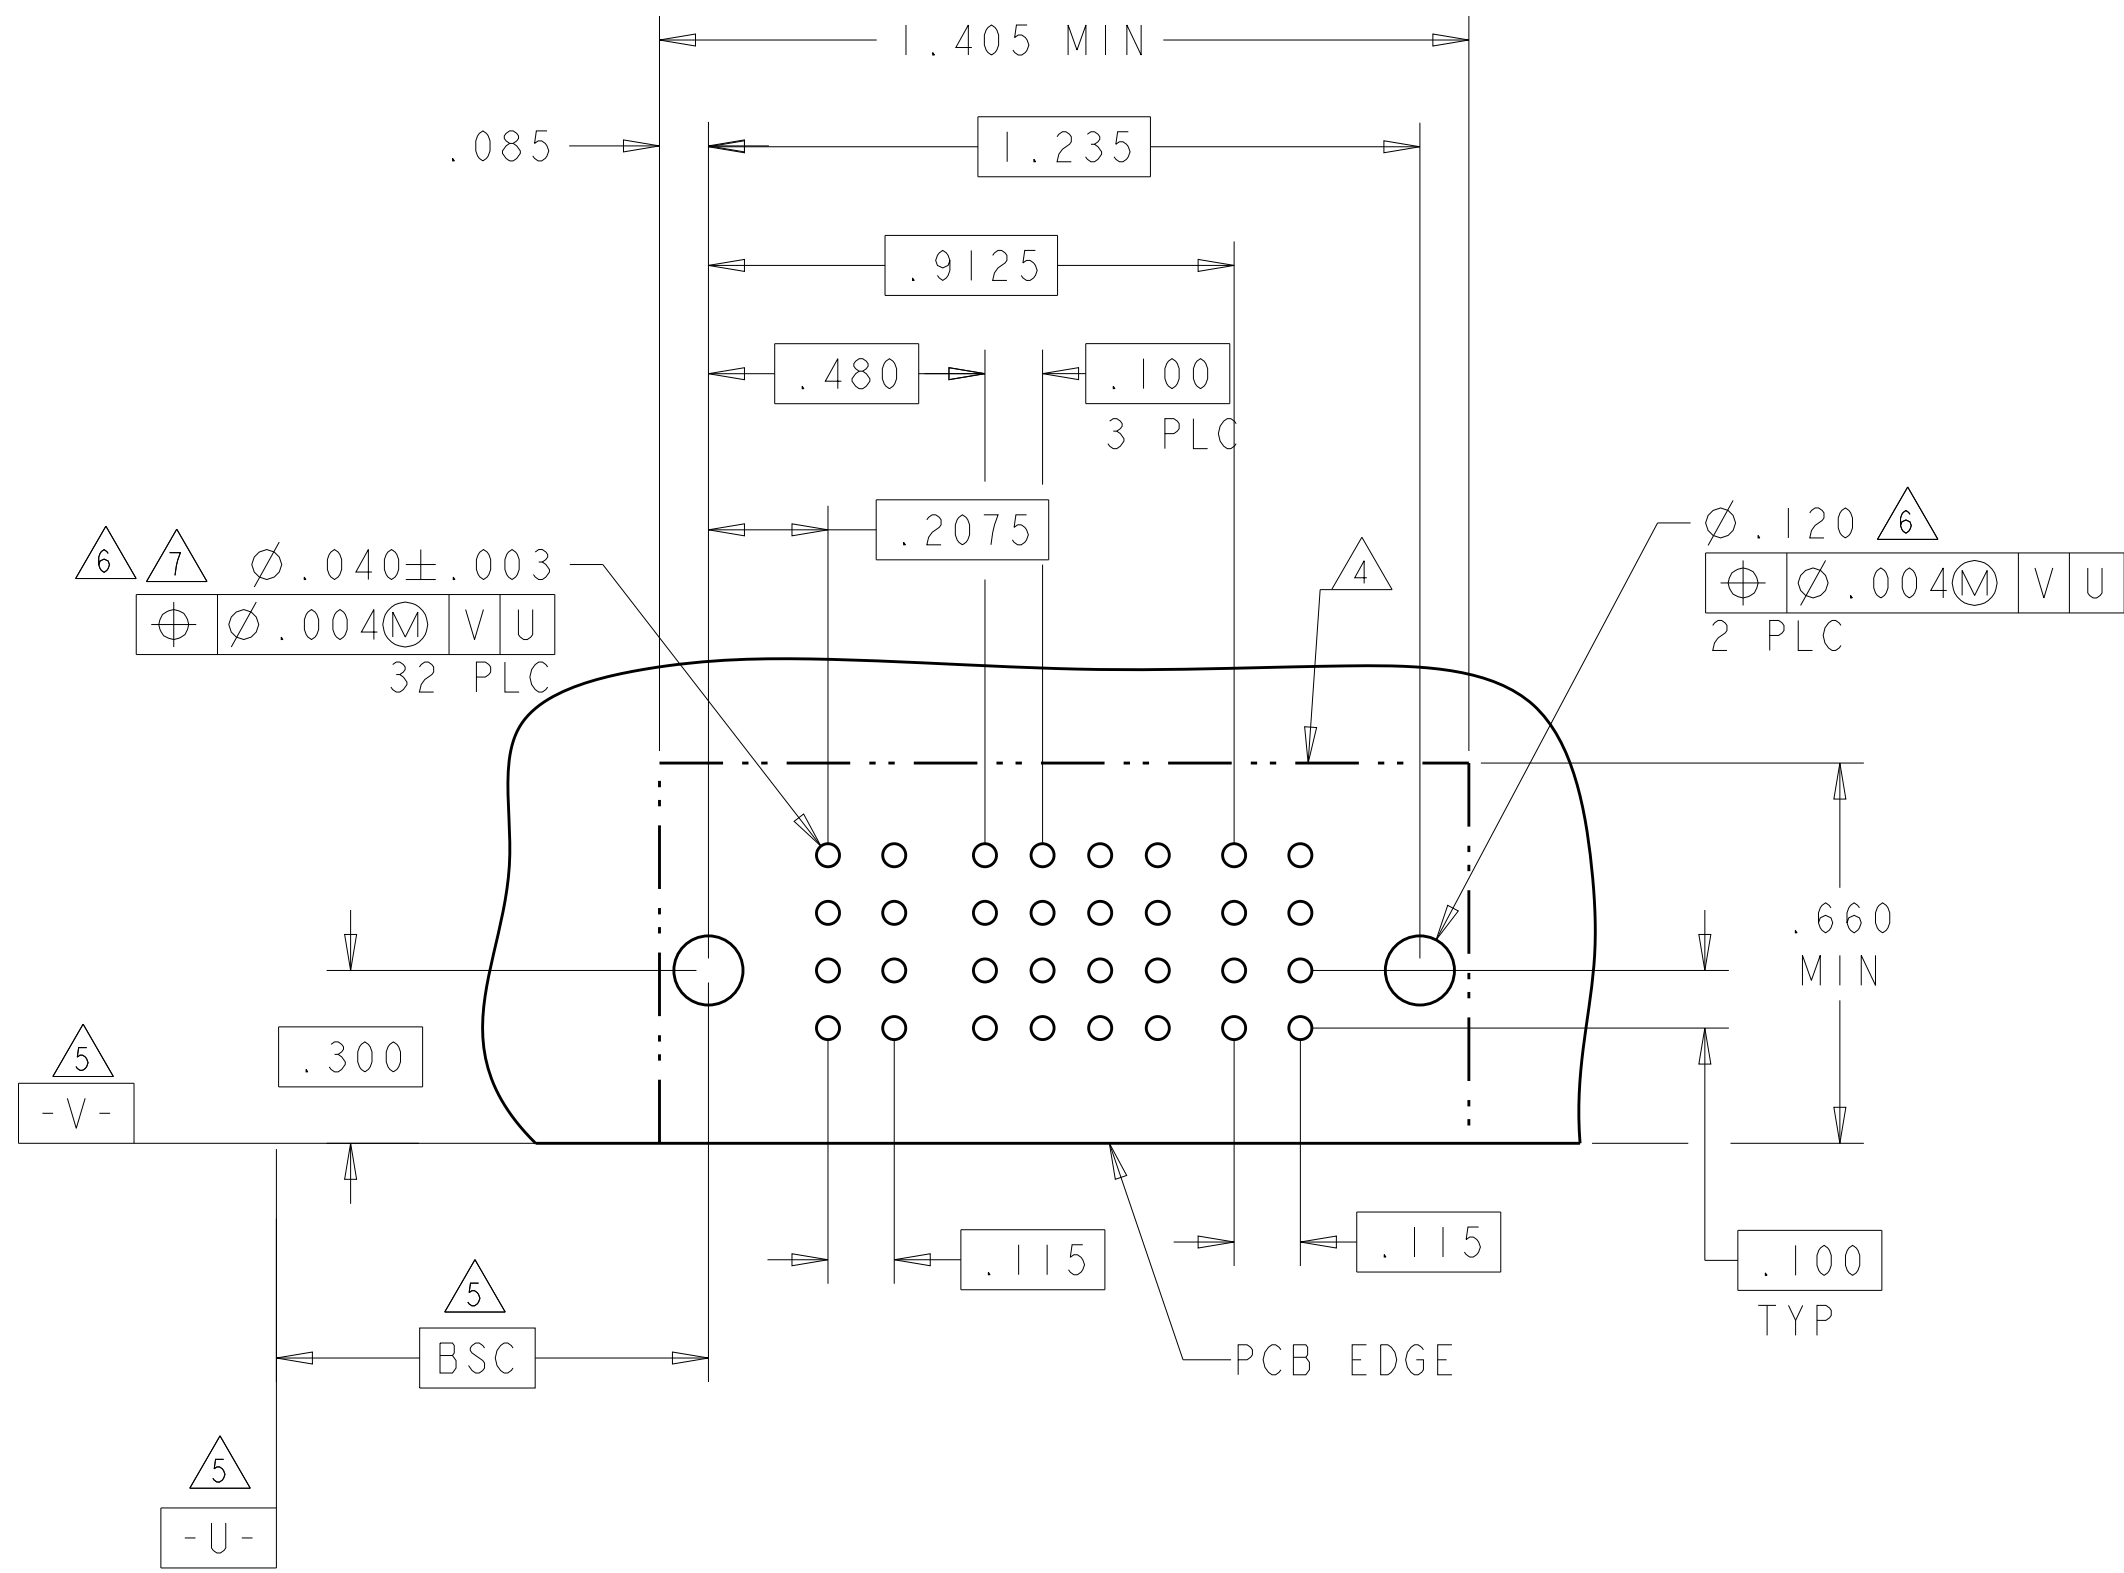4805 (3/11)


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER				SIGNAL			POWER																
			P1	P2	P3	P4	I	2	3	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	
4-6450830-3	D		TM	TM	TM	TM	J	J	J	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	
	K						K	K																		
	N						N	N																		
	S						S	S																		
4P + 12S + 16P																										

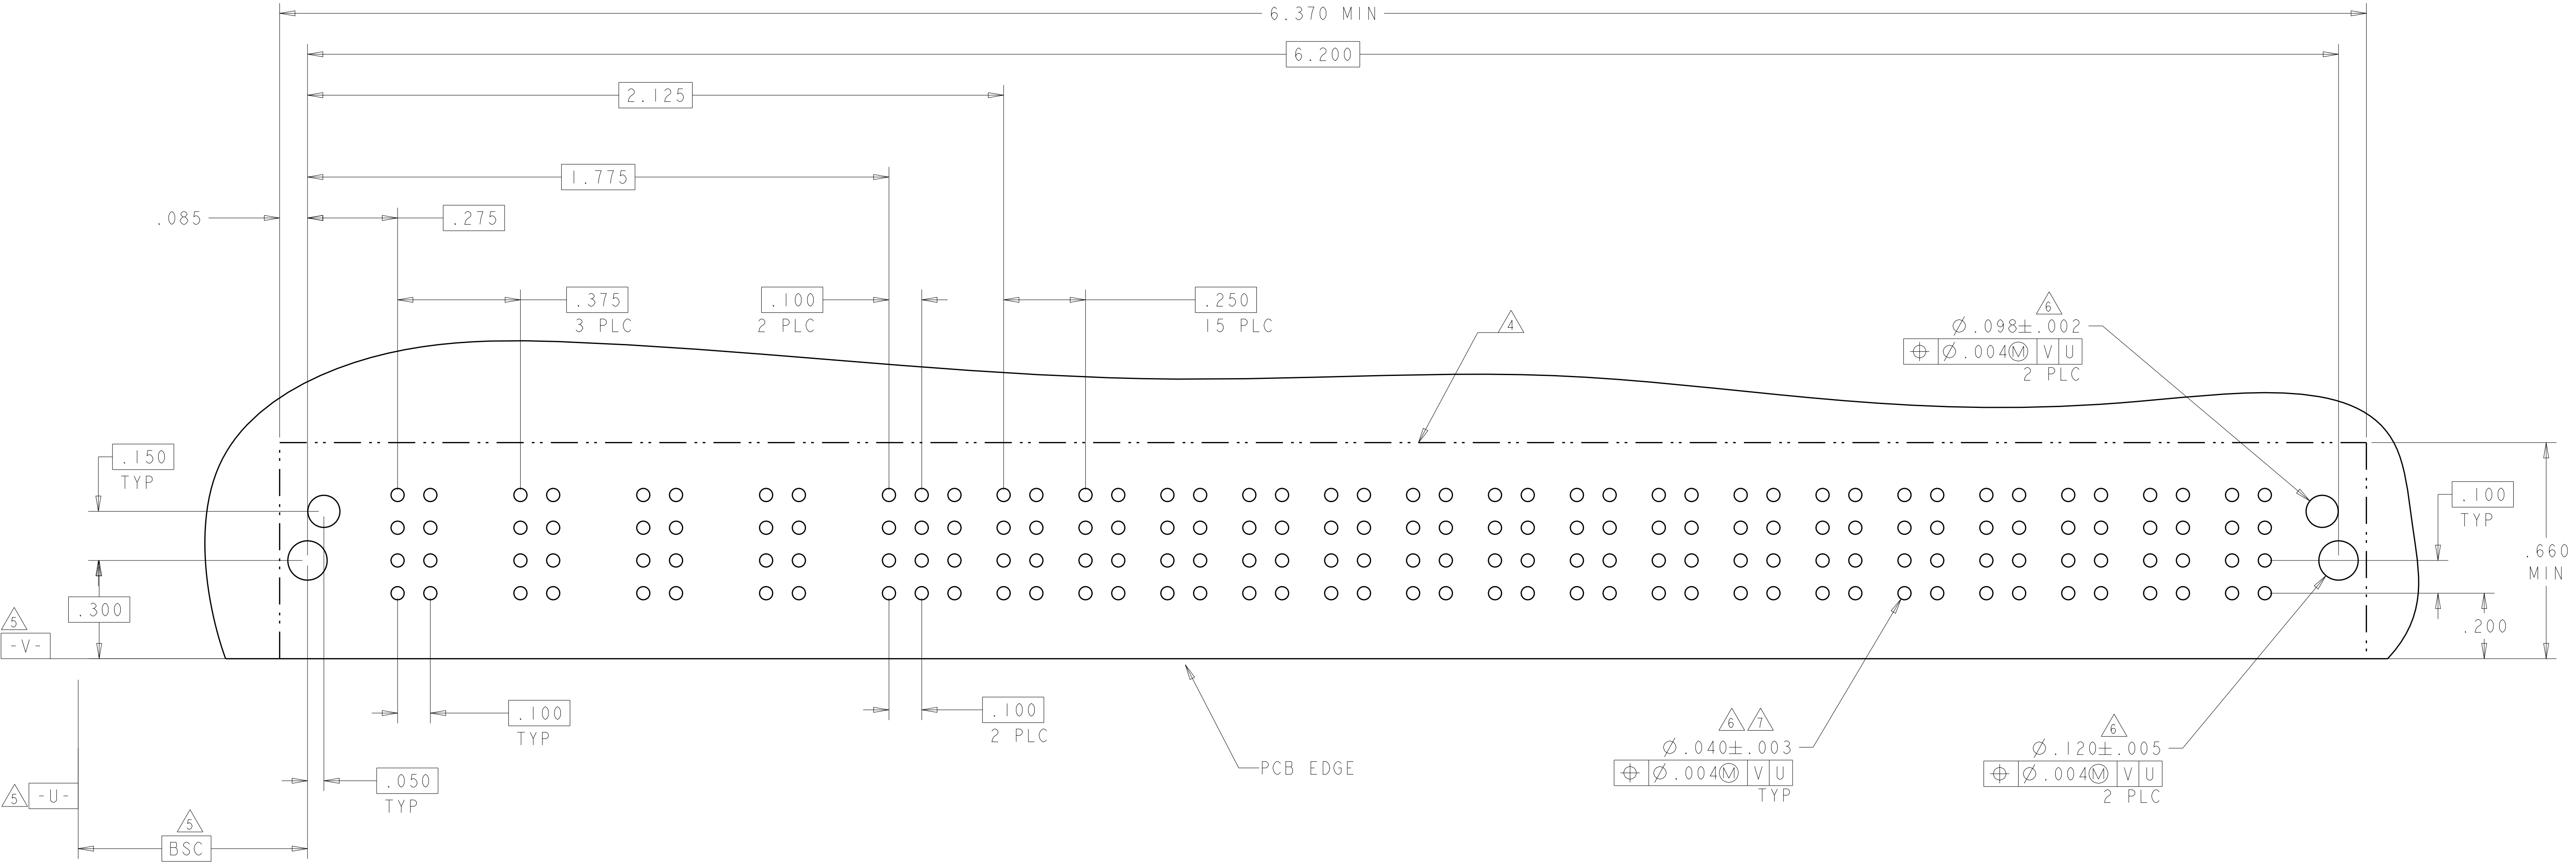

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO 10APR2007	 TE Connectivity					
		CHK S. ZHAO 10APR2007						
DIMENSIONS: INCHES		APVD S. ZHAO -	NAME	RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE				
		PRODUCT SPEC 108-2292						
		APPLICATION SPEC 114-13251						
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±°		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO		
MATERIAL		WEIGHT		A	100779	©=6450830	-	
		CUSTOMER DRAWING		SCALE		4:1	SHEET 21 OF 42	REV S2



PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
4-6450830-5	D		TM	TM			J	J	J		TM	TM	TM		
	C						K	K	K						
	B						G	G	G						
	A	HD					S	S	S						HD
3P + 24S + 3P															

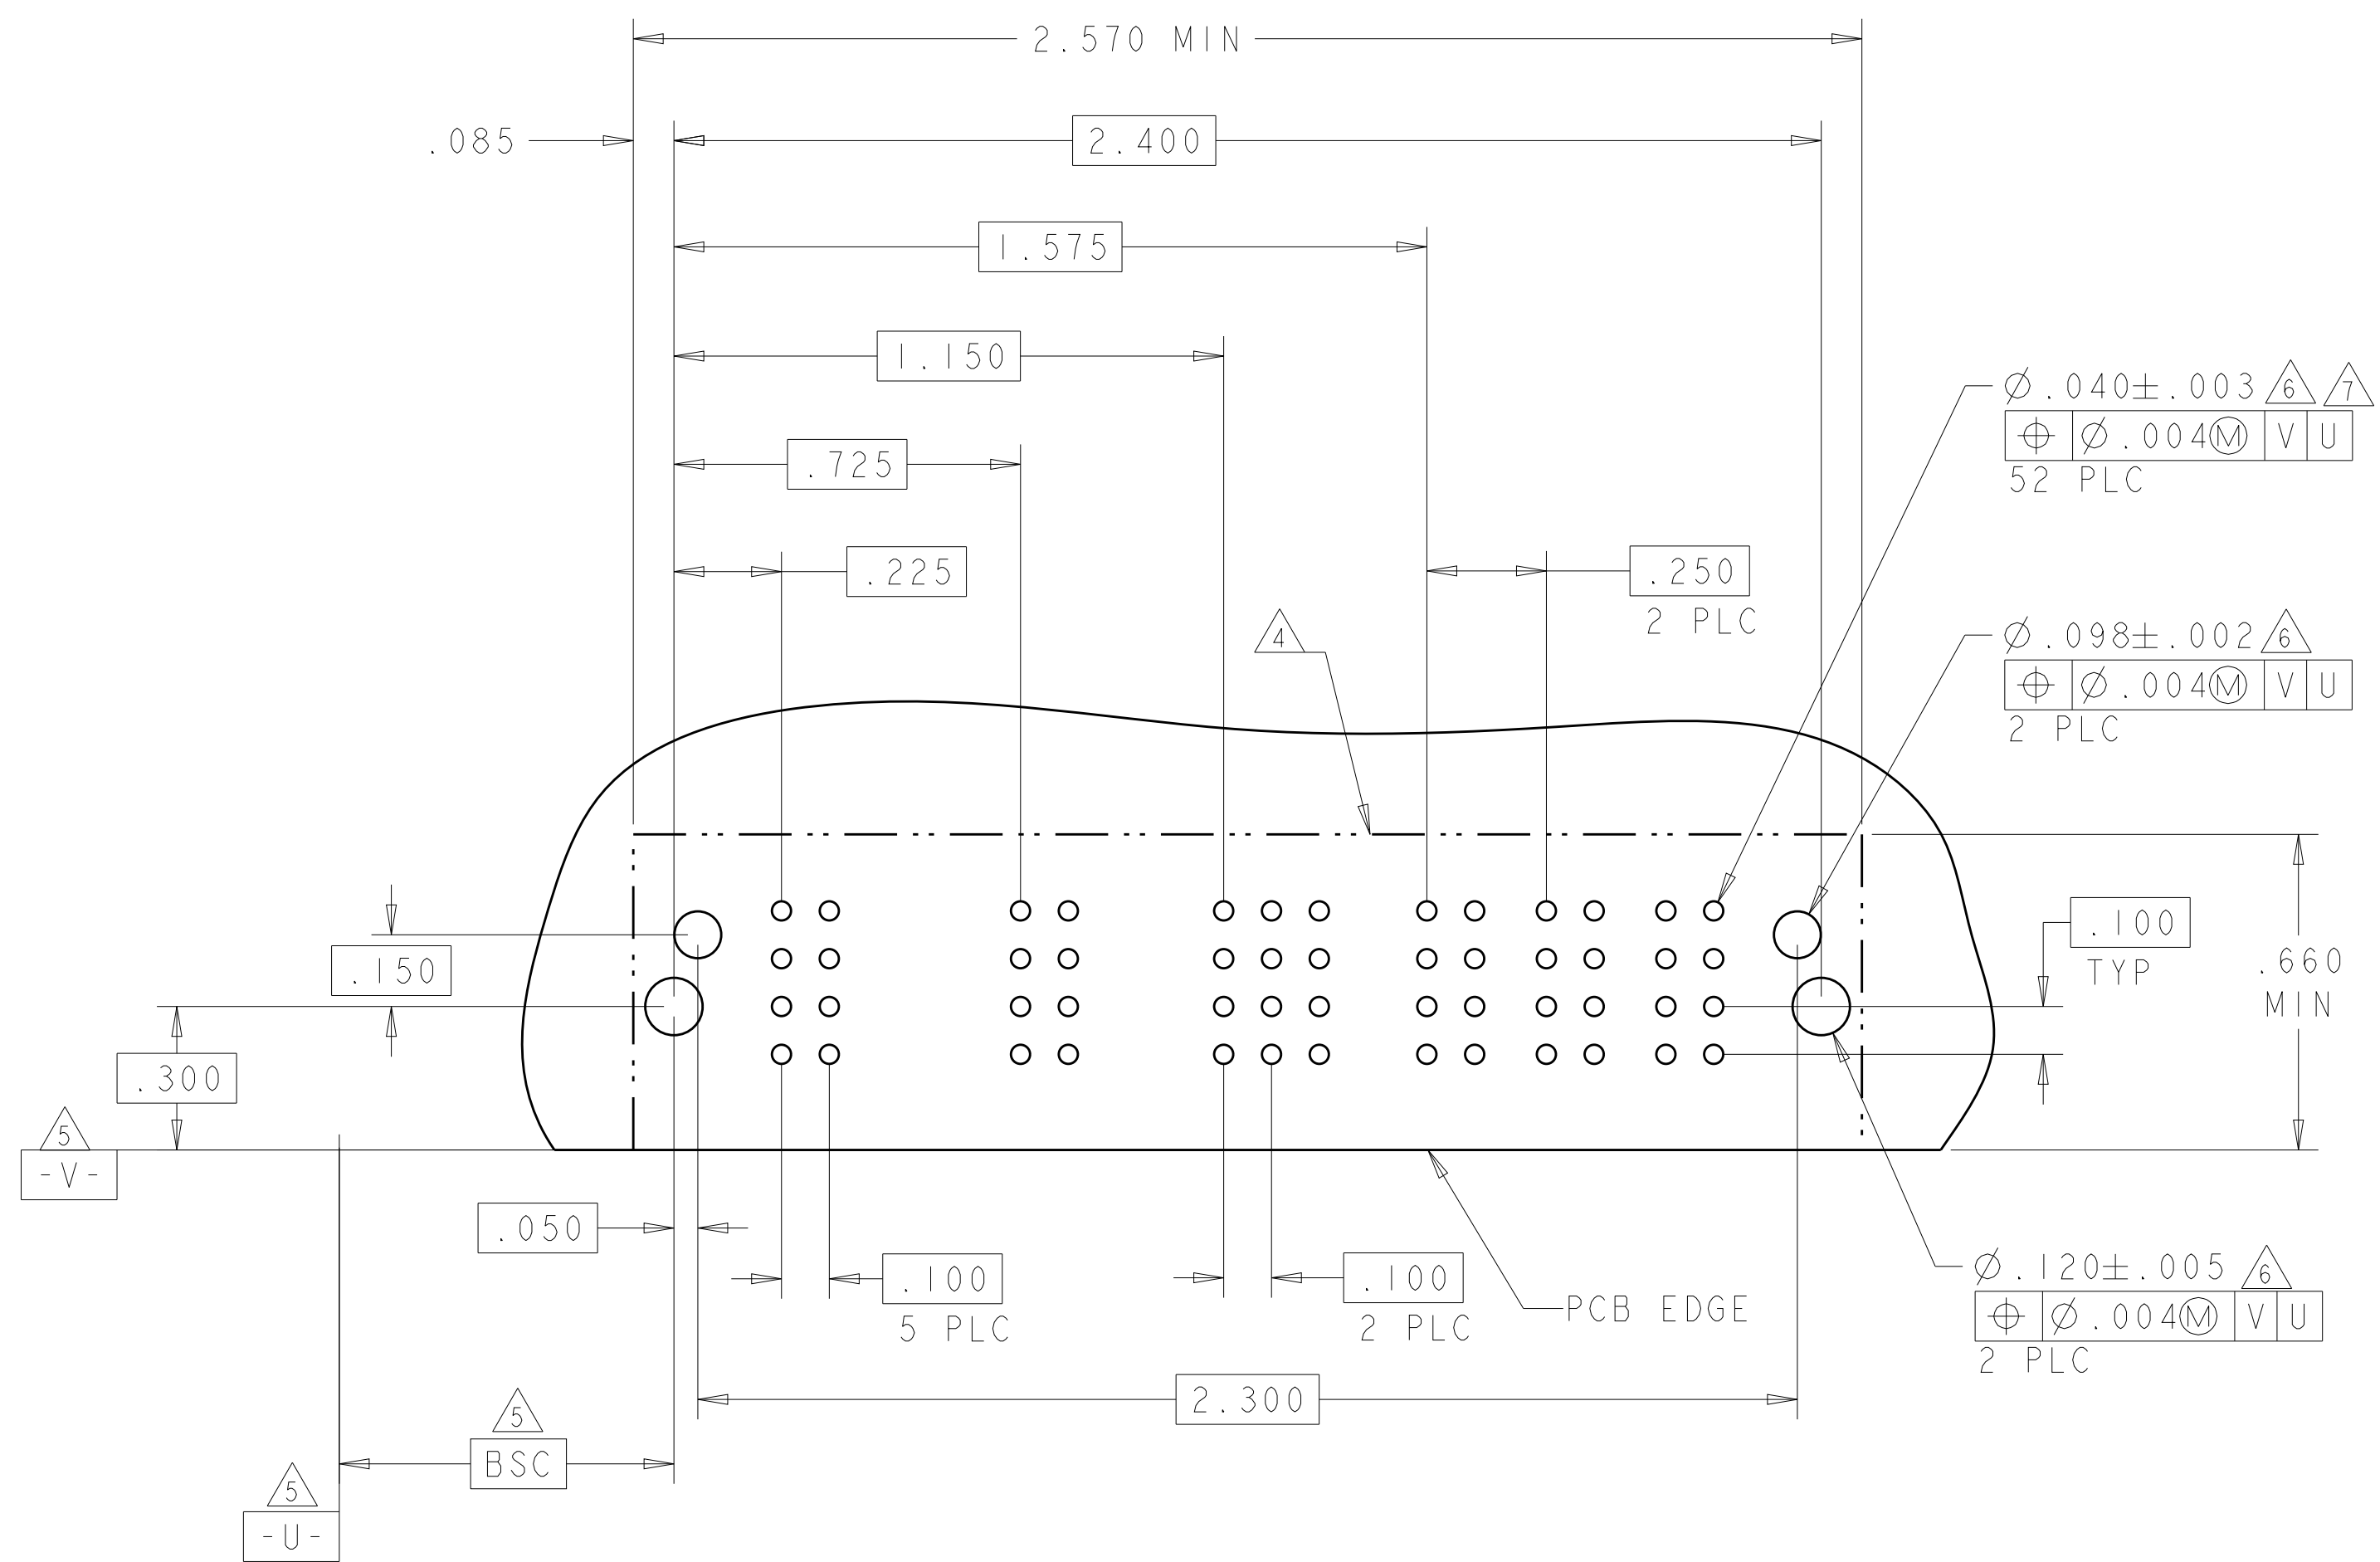4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER		SIGNAL				POWER			
			P1	P2	1	2	3	4	P3	P4		
4-6450830-6	D C B A		TM	TM	J	J	J	J	TM	TM		
					FK	FK	FK	FK				
					G	G	G	G				
					S	S	S	S				
HD												HD
2P + 16S + 2P												

PART NUMBER	ROWS		POWER		SIGNAL		POWER		
			P1	P2	1	2	P3	P4	
4-6450830-7	D C B A		LM	LM	F	J	TM	TM	
					K	E			
					N	N			
					S	S			
2LP + 8S + 2P			HD				HD		

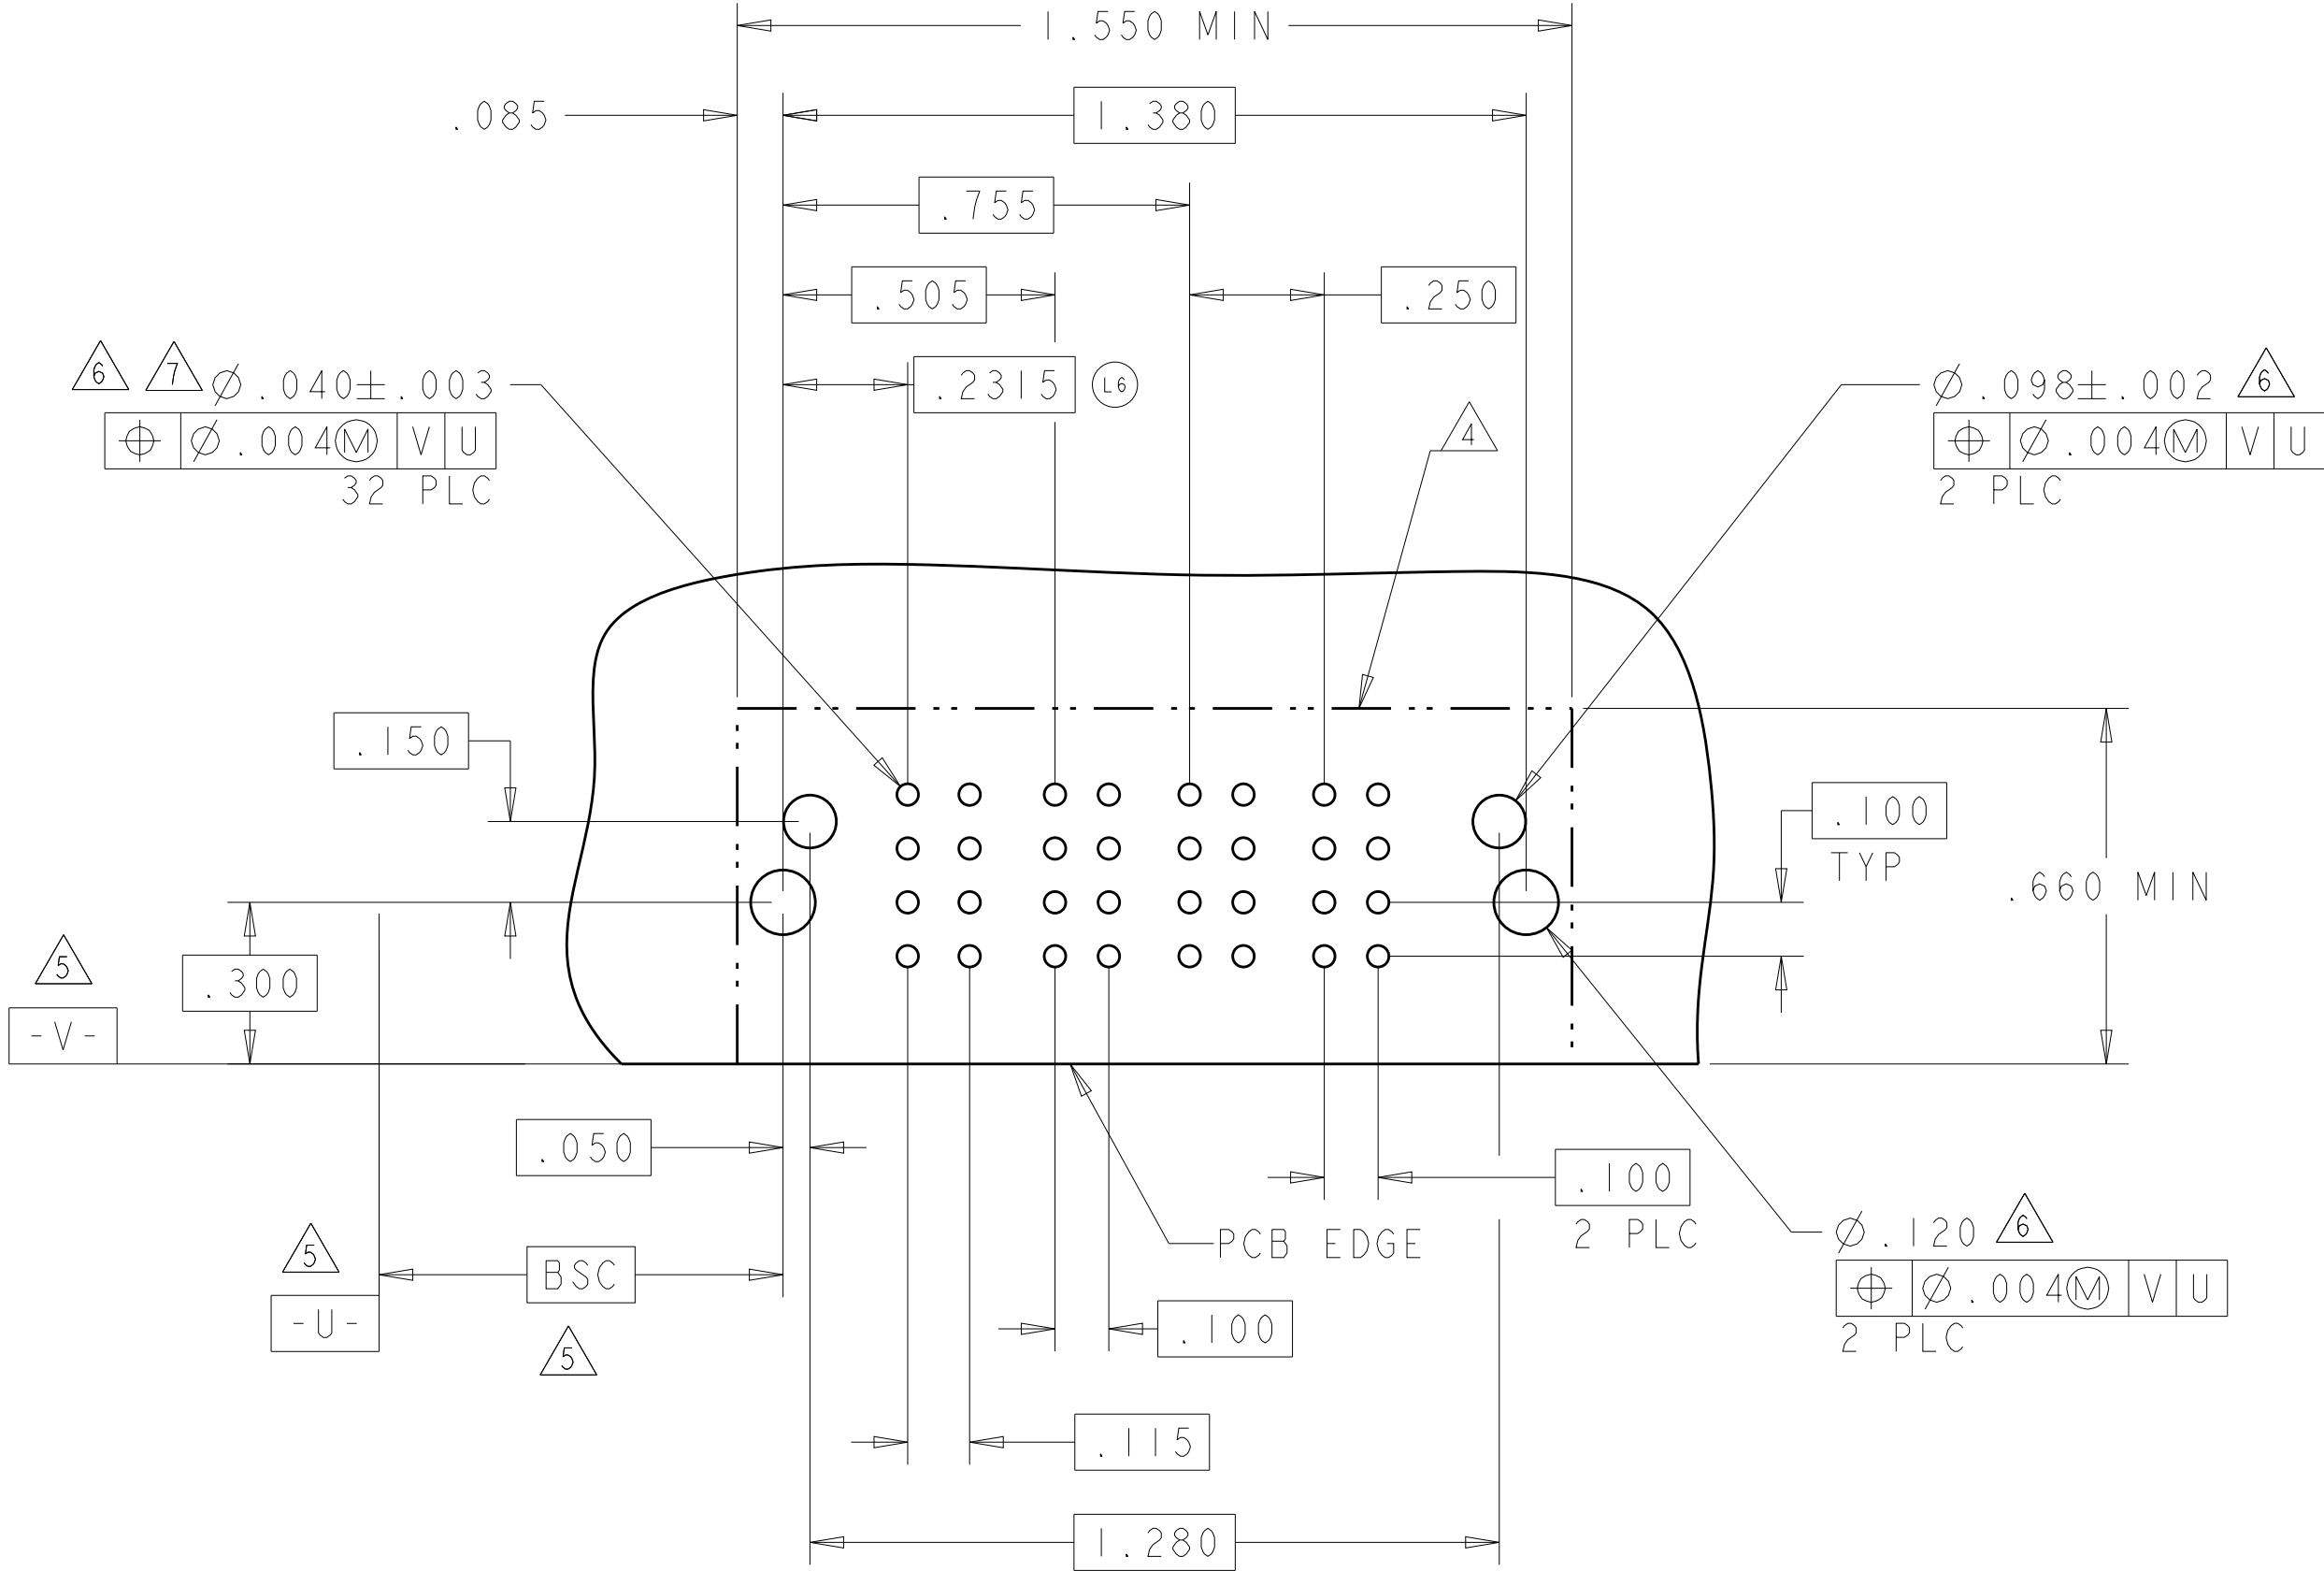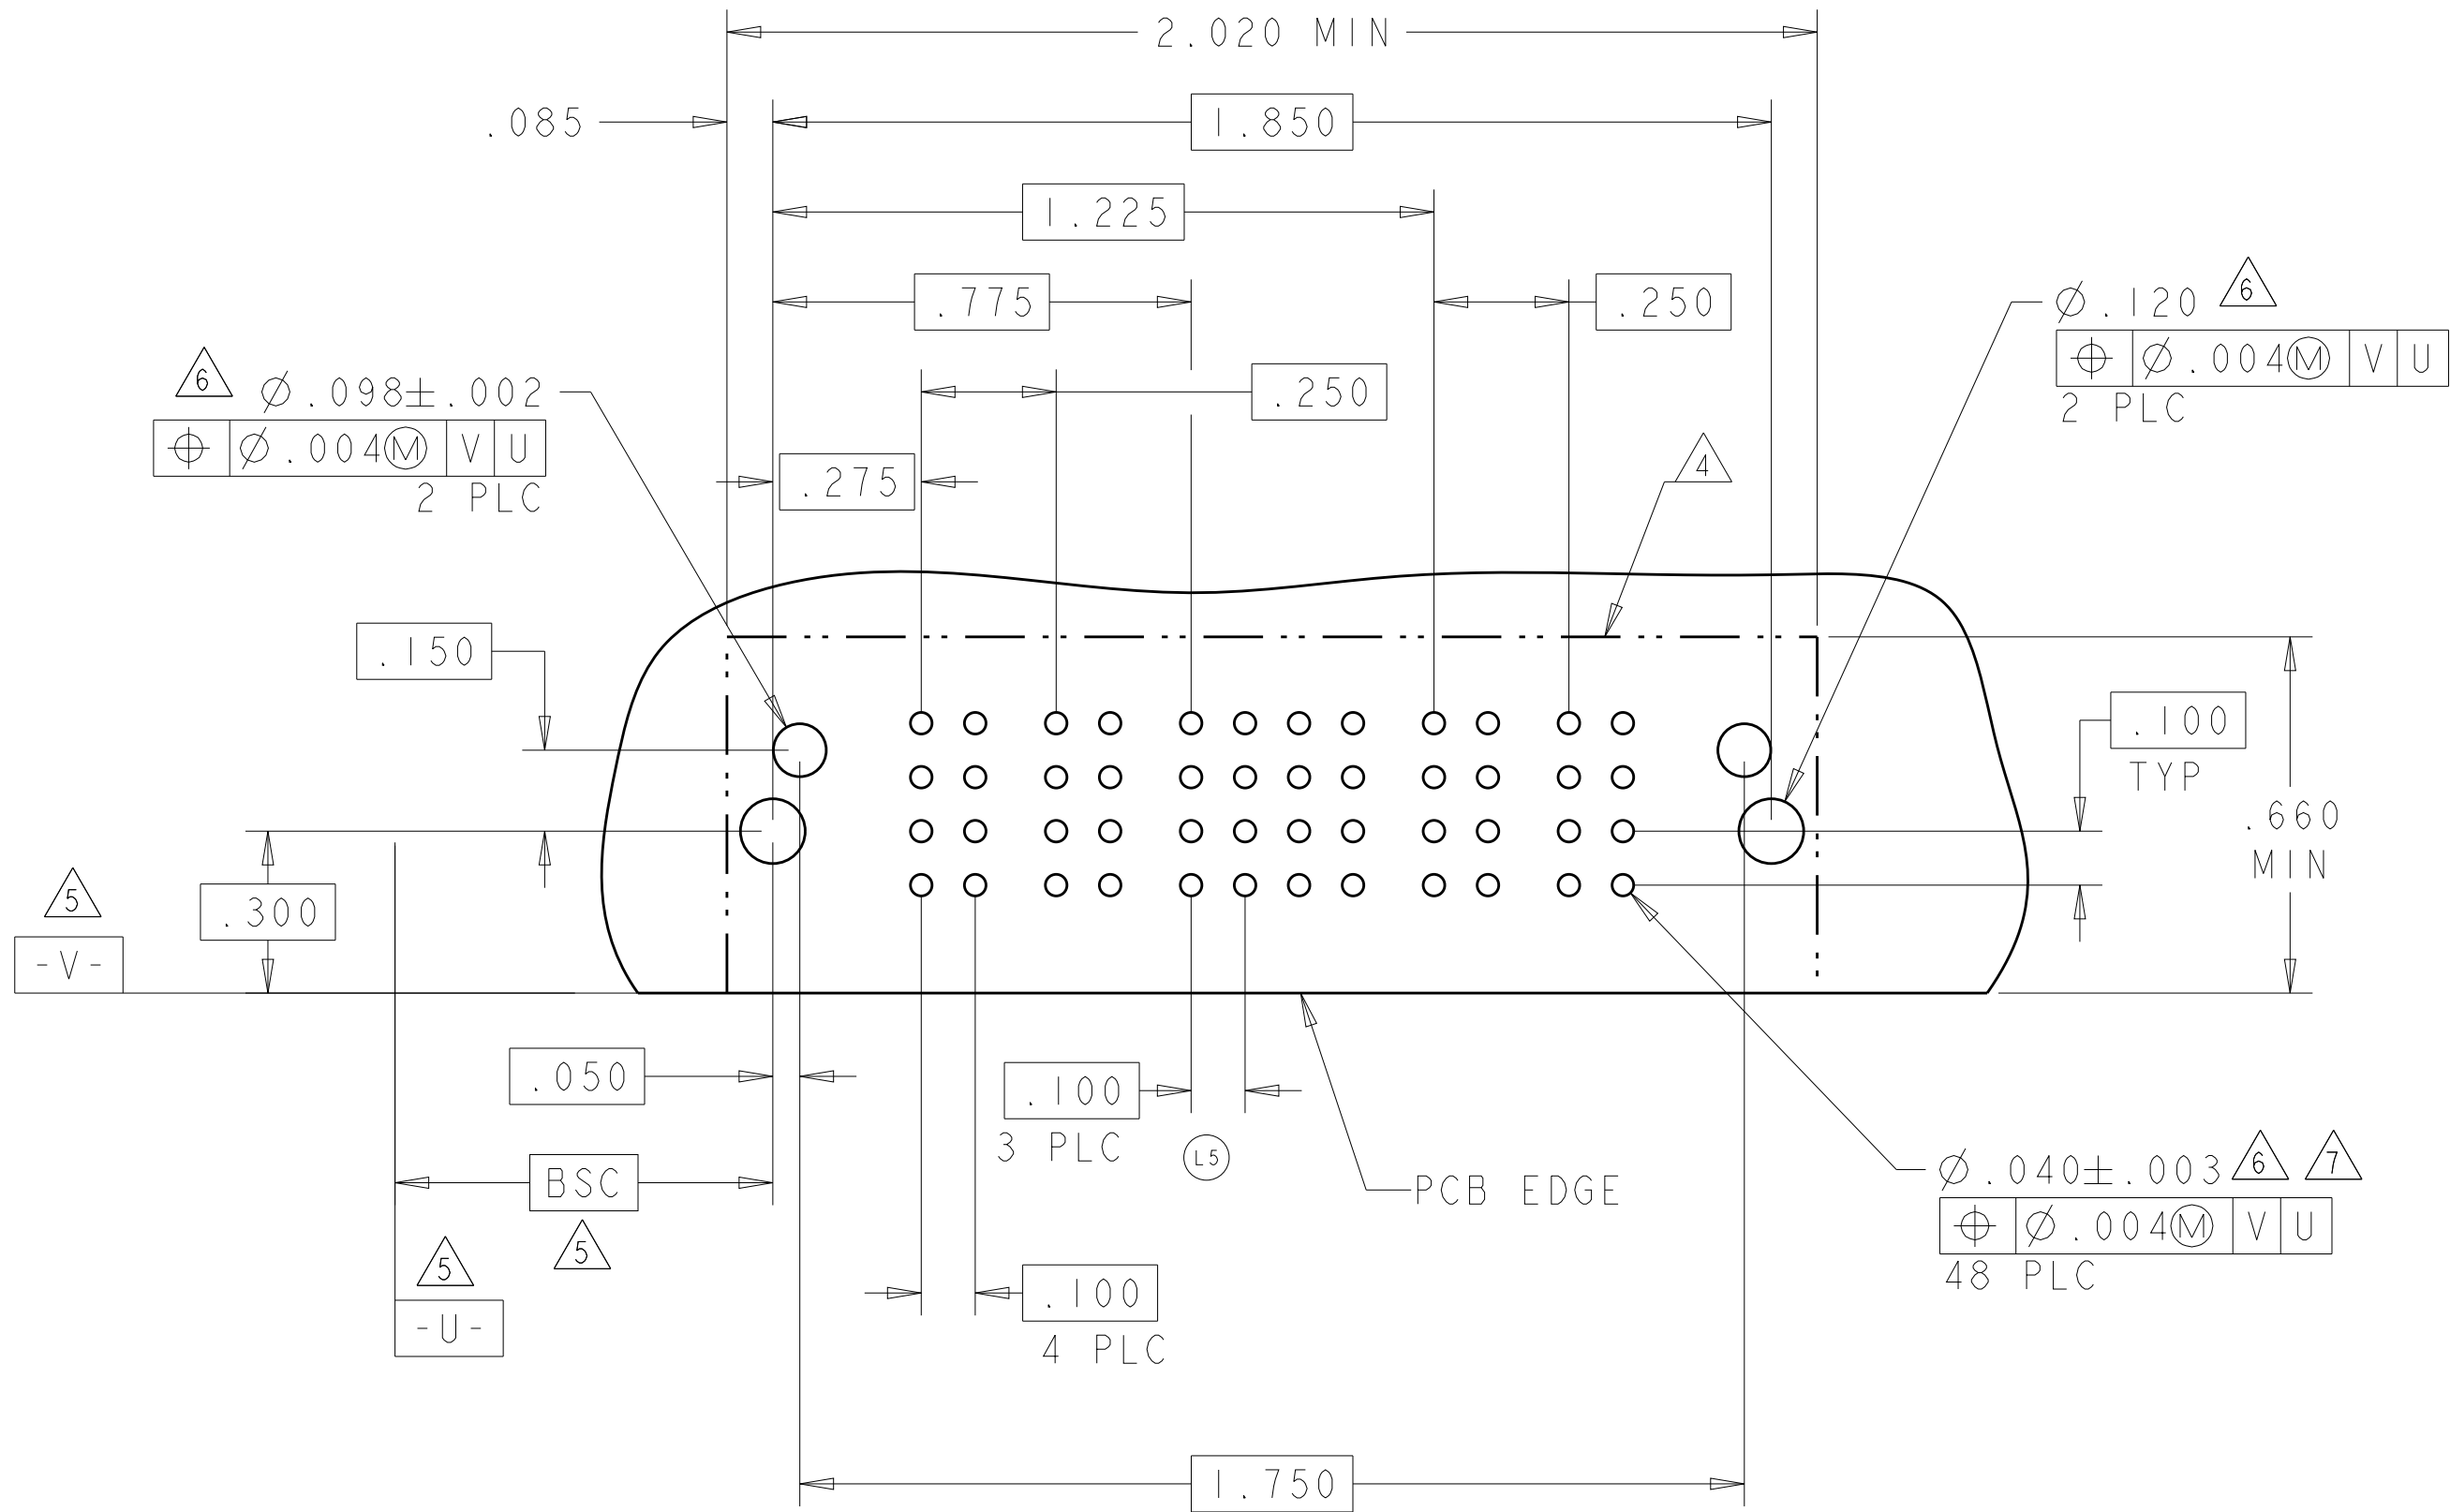

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S.ZHAO 10APR2007
CHK S.ZHAO 10APR2007
APVD S.ZHAO -

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH -

MATERIAL -

CUSTOMER DRAWING

PRODUCT SPEC 108-2292
APPLICATION SPEC 114-13251
WEIGHT -


NAME
RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE


SIZE A1
CAGE CODE 00779
DRAWING NO. 6450830


RESTRICTED TO -

SCALE 4:1
SHEET 23 OF 42
REV S2


—NO CONTACT LOADED

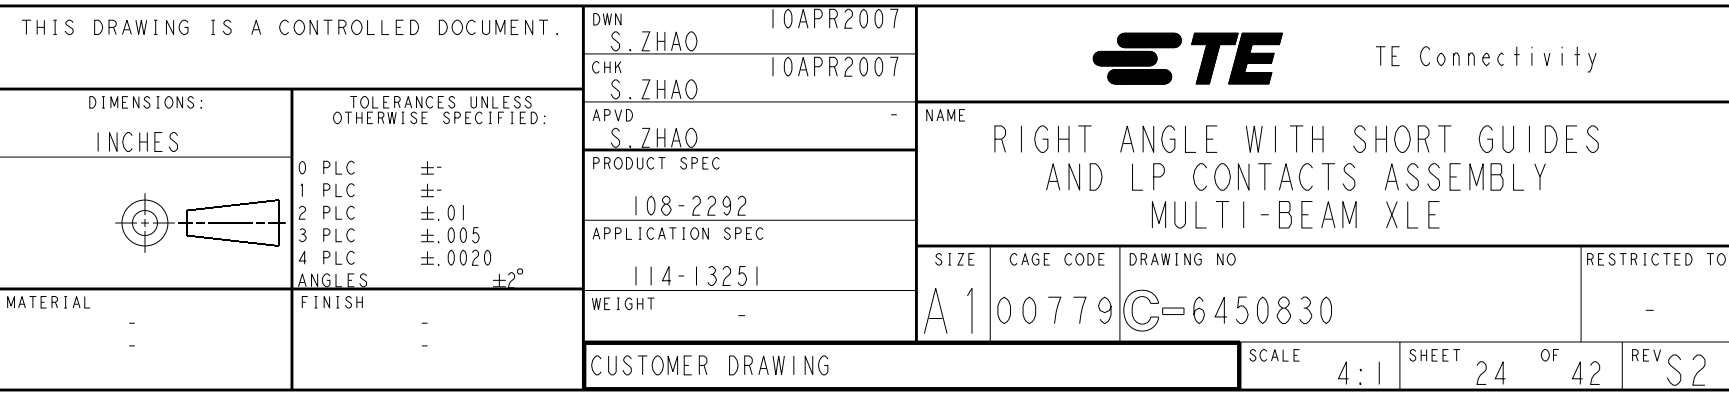

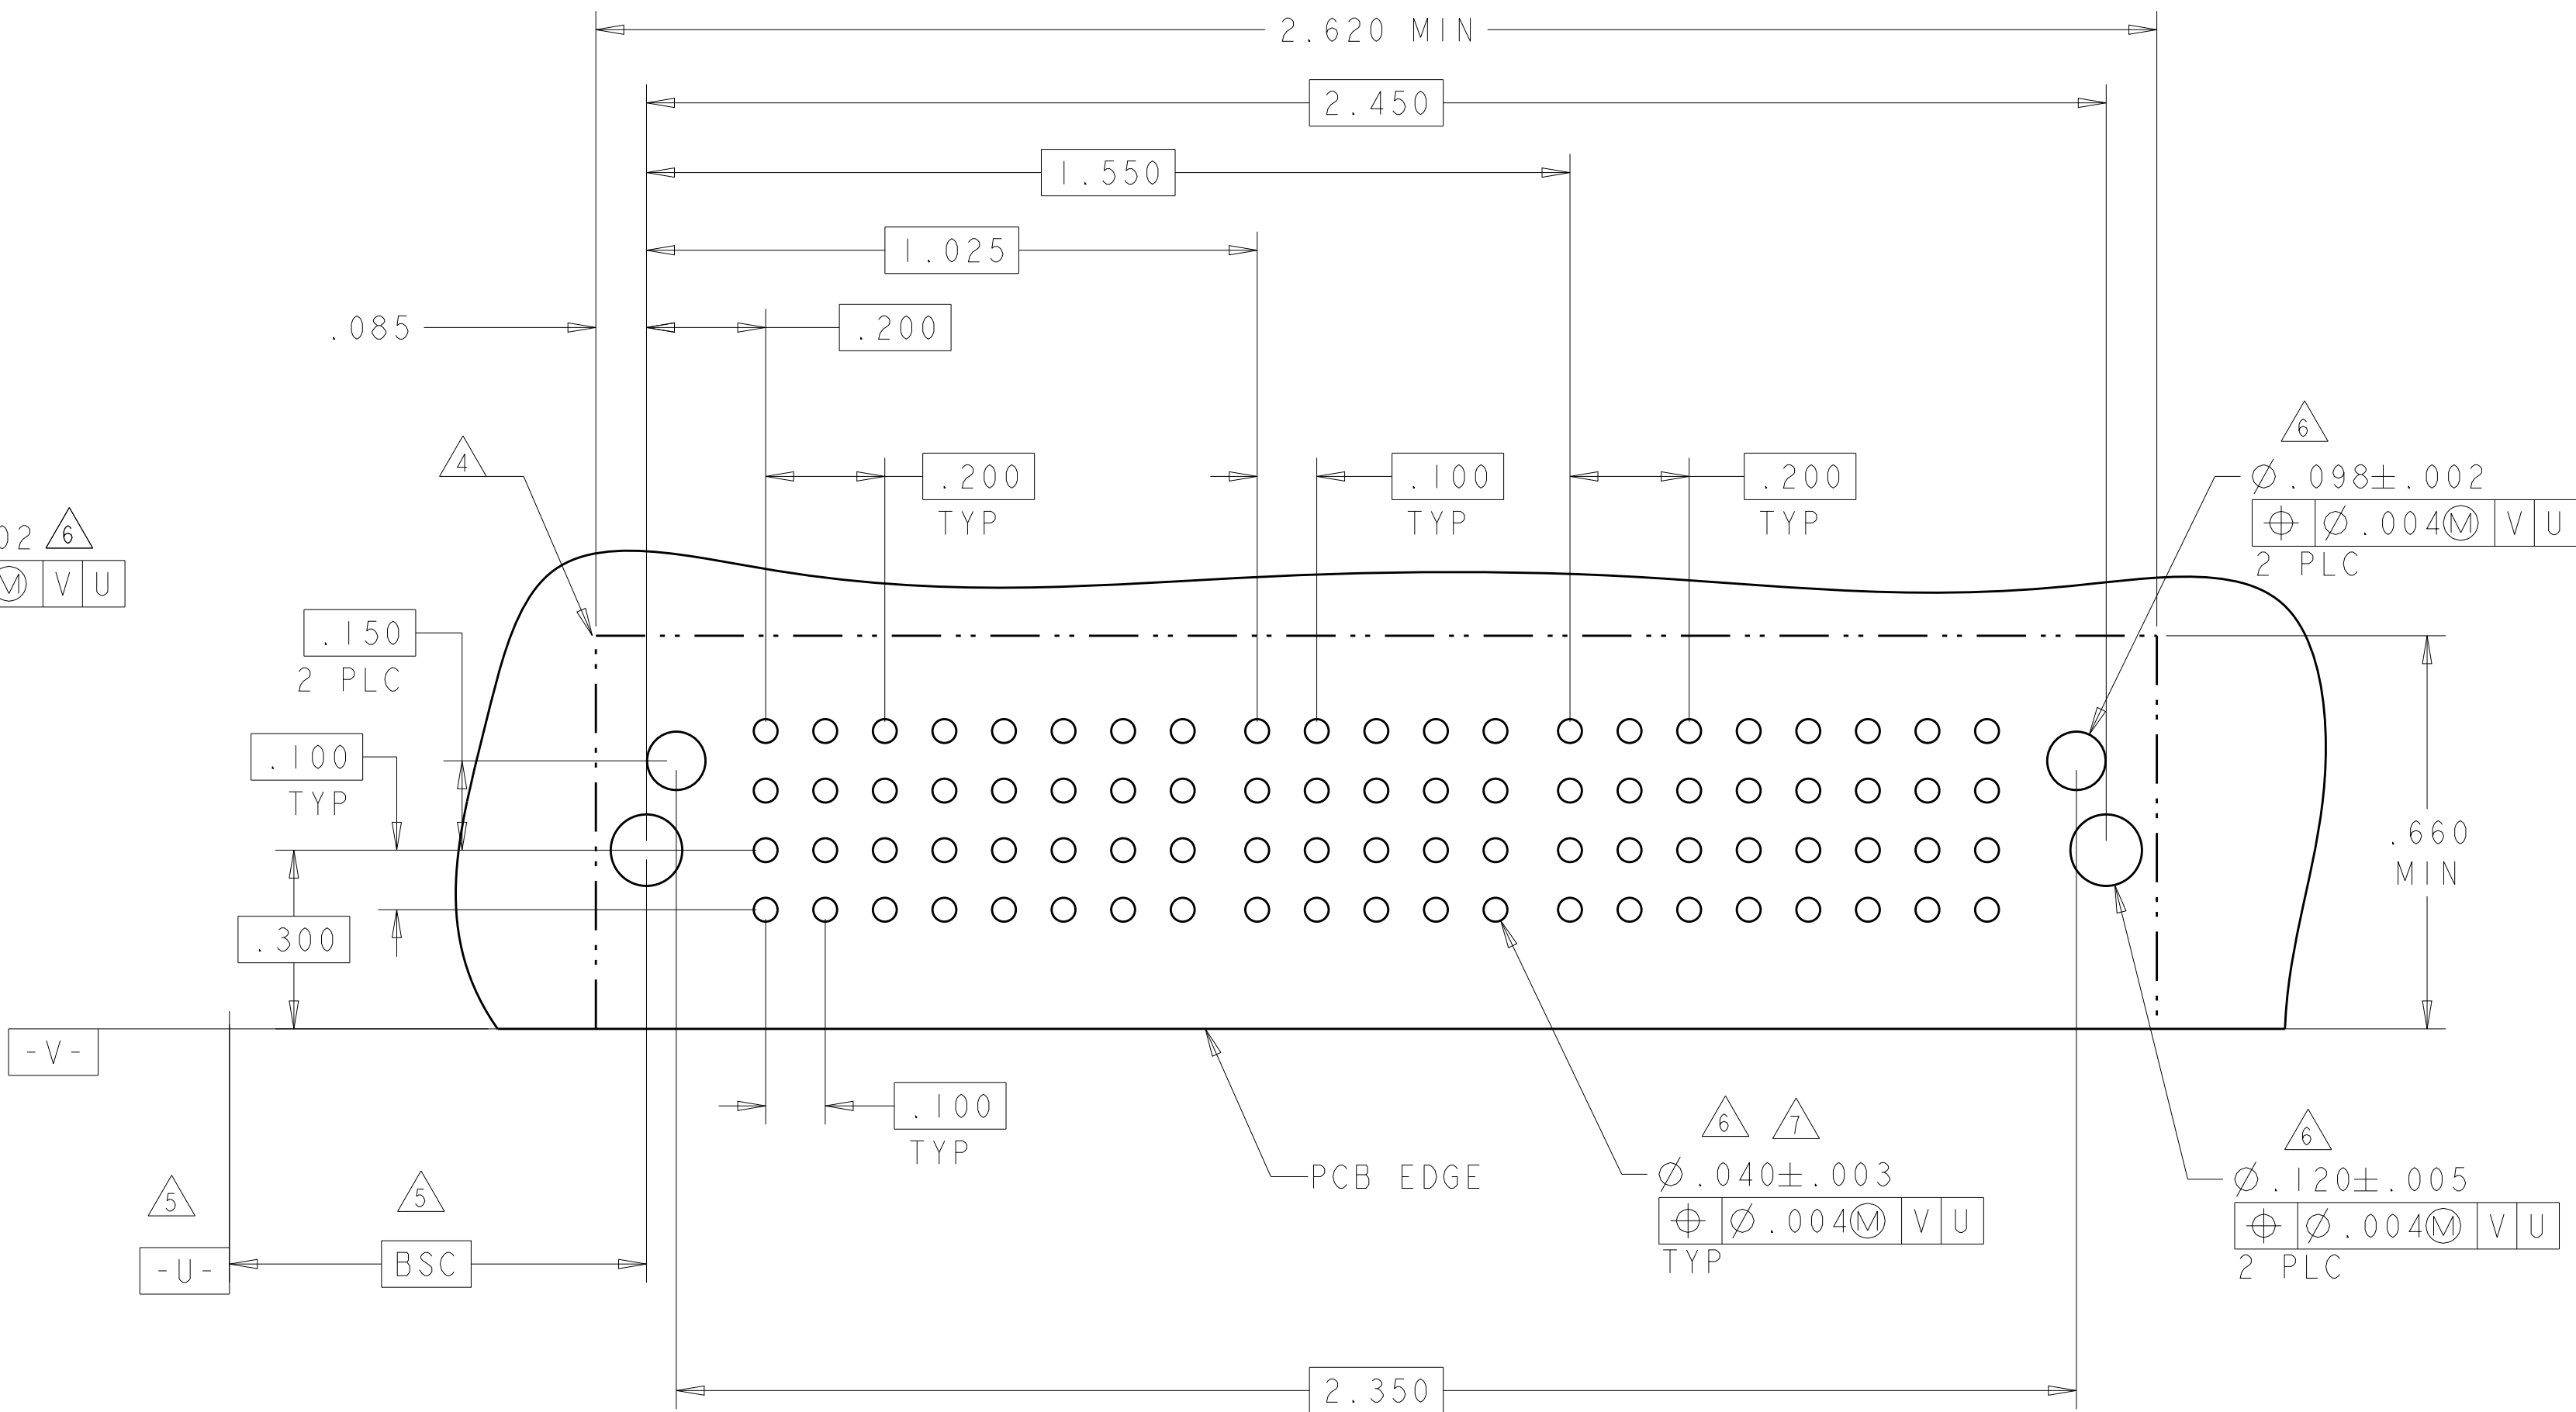[illegible]4805 (3/11)

PART NUMBER	ROWS		POWER		SIGNAL		POWER		
			P1	P2	I	2	P4	P5	
5-6450830-4	D		TM	TM	J	J	TM	TM	
	C				K	K			
	B				N	N			
	A	HD			S	S			



2P + 8S + 2P

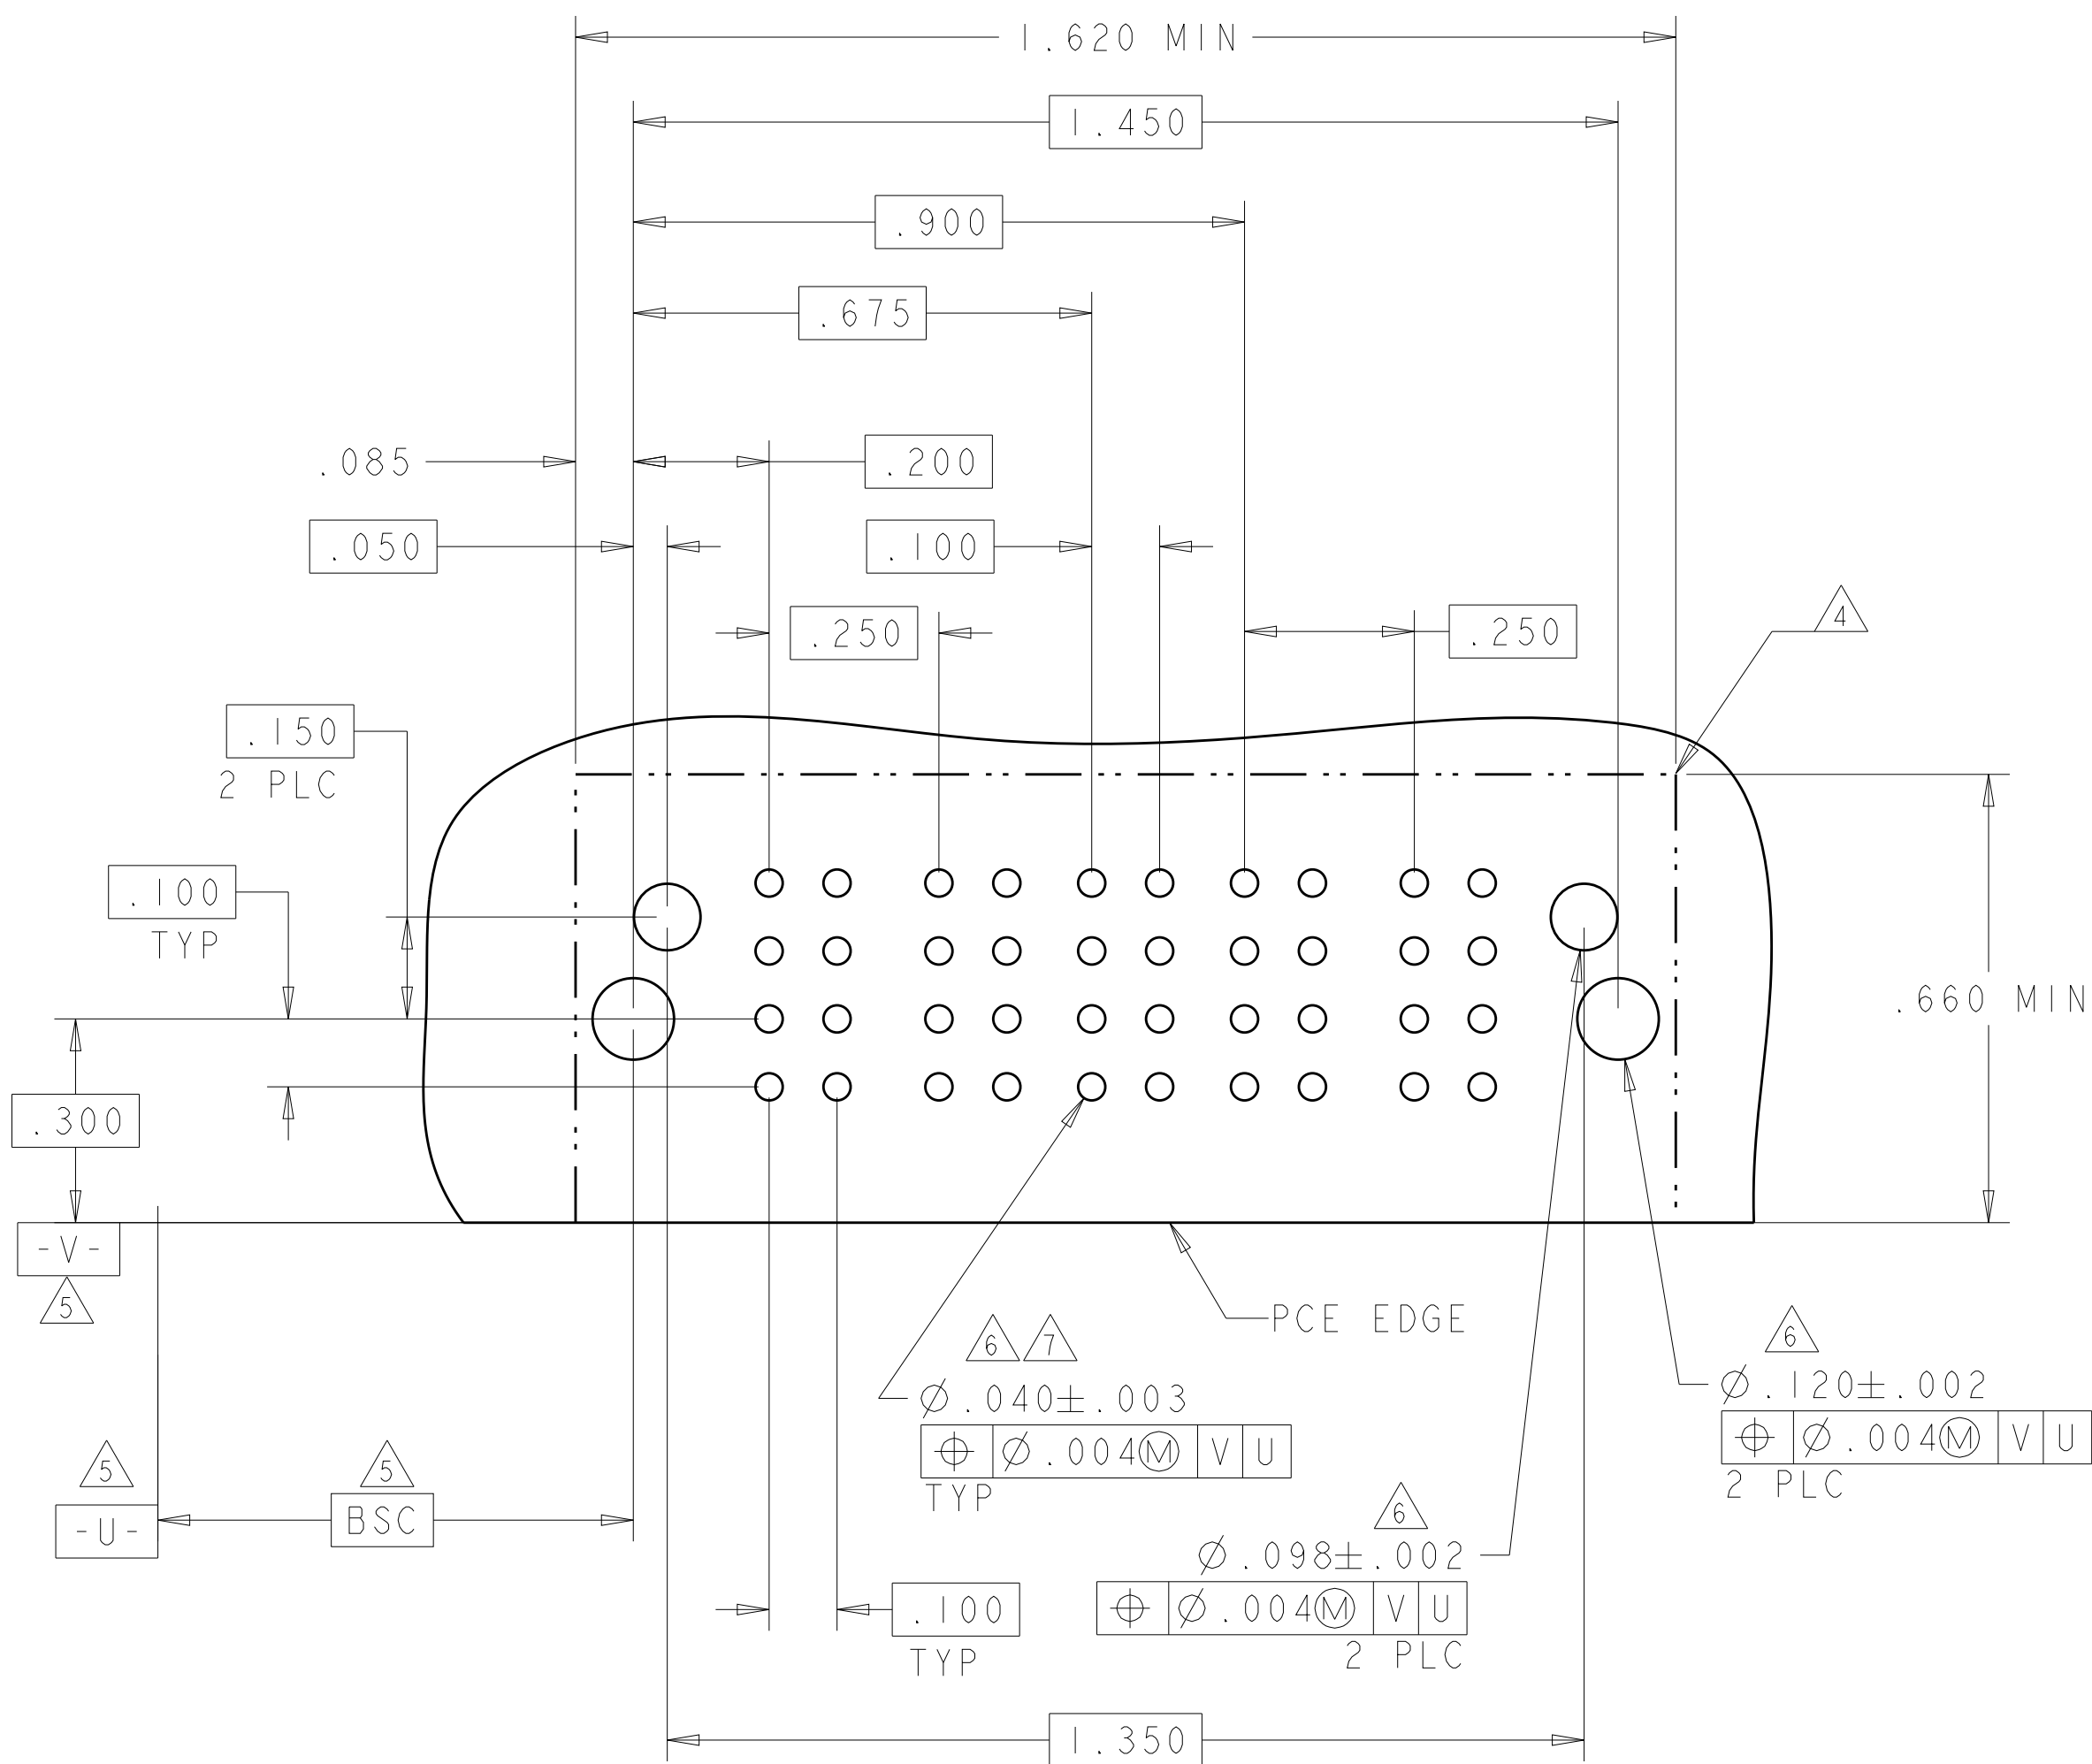4805 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER						SIGNAL			POWER		
			P1	P2	P3	P4	P5	P6	1	2	3	P7	P8	
5-6450830-5	D		TM	TM	TM	TM	TM	TM	J	J	J	LML	LML	
	C								K	K	K			
	B								N	N	N			
	A								S	S	H			
3ACP+3P+12S+2LP			8											

PART NUMBER	ROWS		POWER			SIGNAL				POWER					
			P1	P2	P3	1	2	3	4	P4	P5	P6	P7	P8	
5-6450830-6	D		TM	TM	TM	J	J	J	J	TM	TM	TM	TM	TM	
	C					K	K	K	K						
	B					N	N	N	N						
	A					S	S	S	S						
3ACP + 16S + 5P															HD

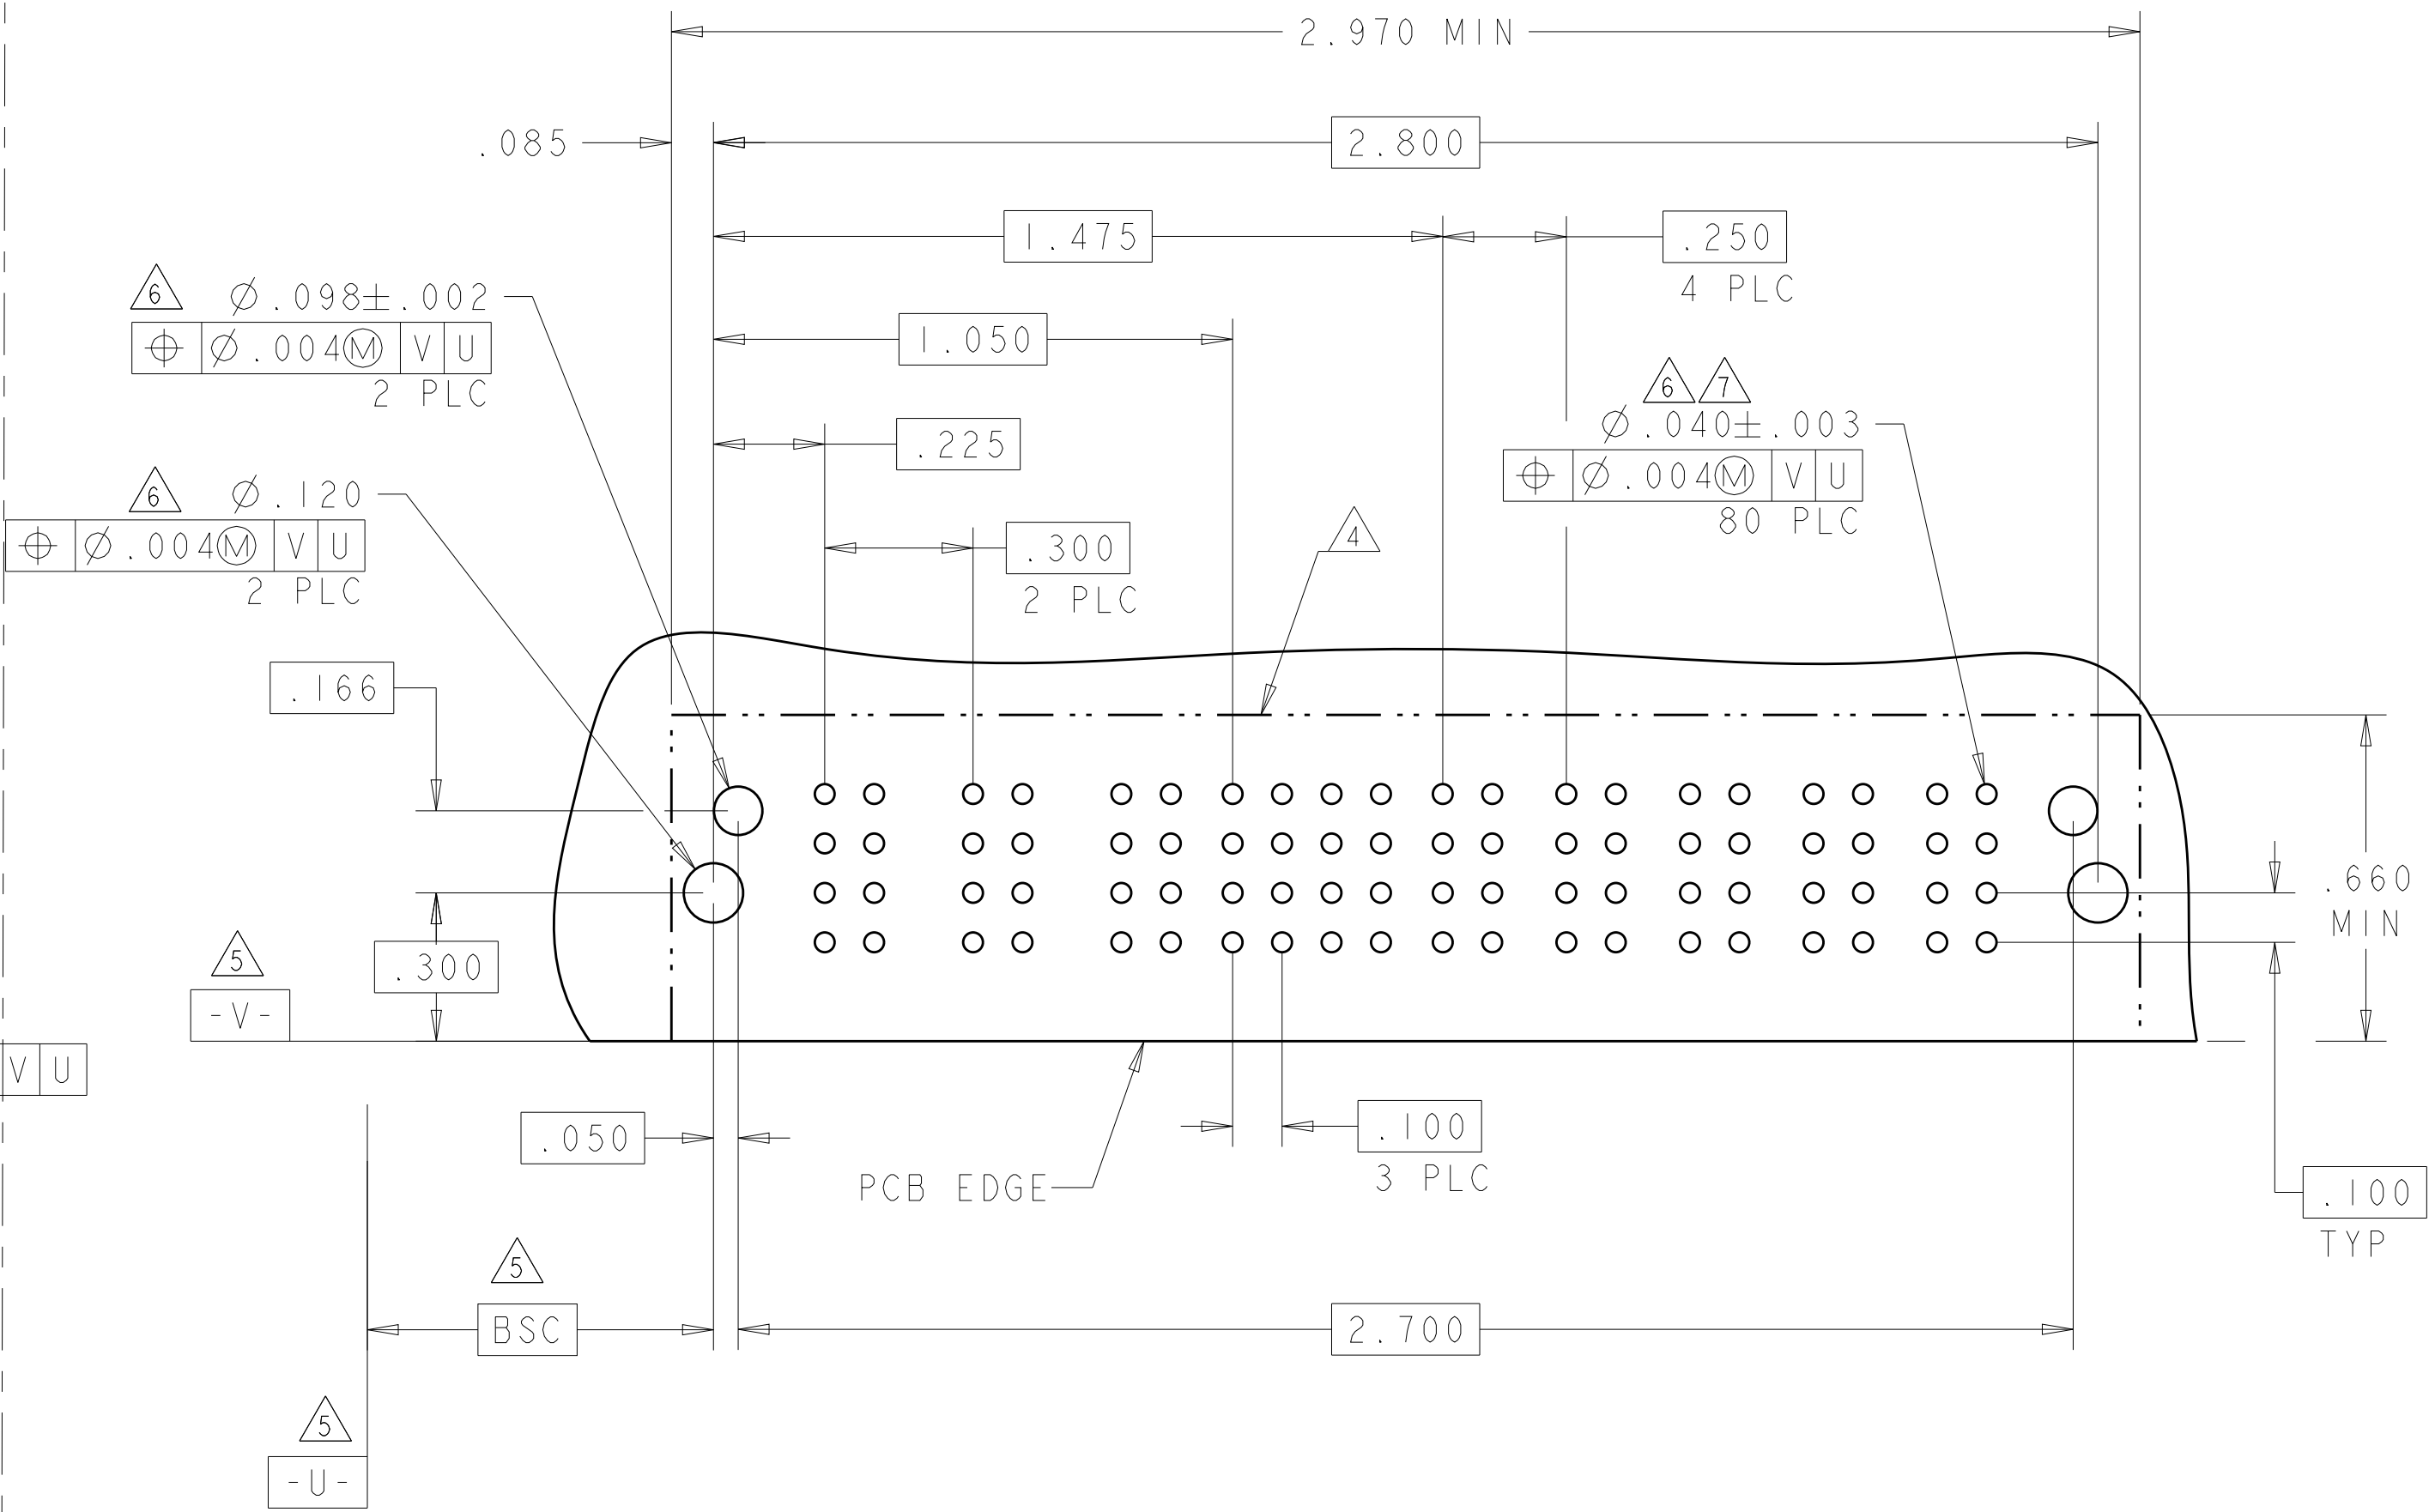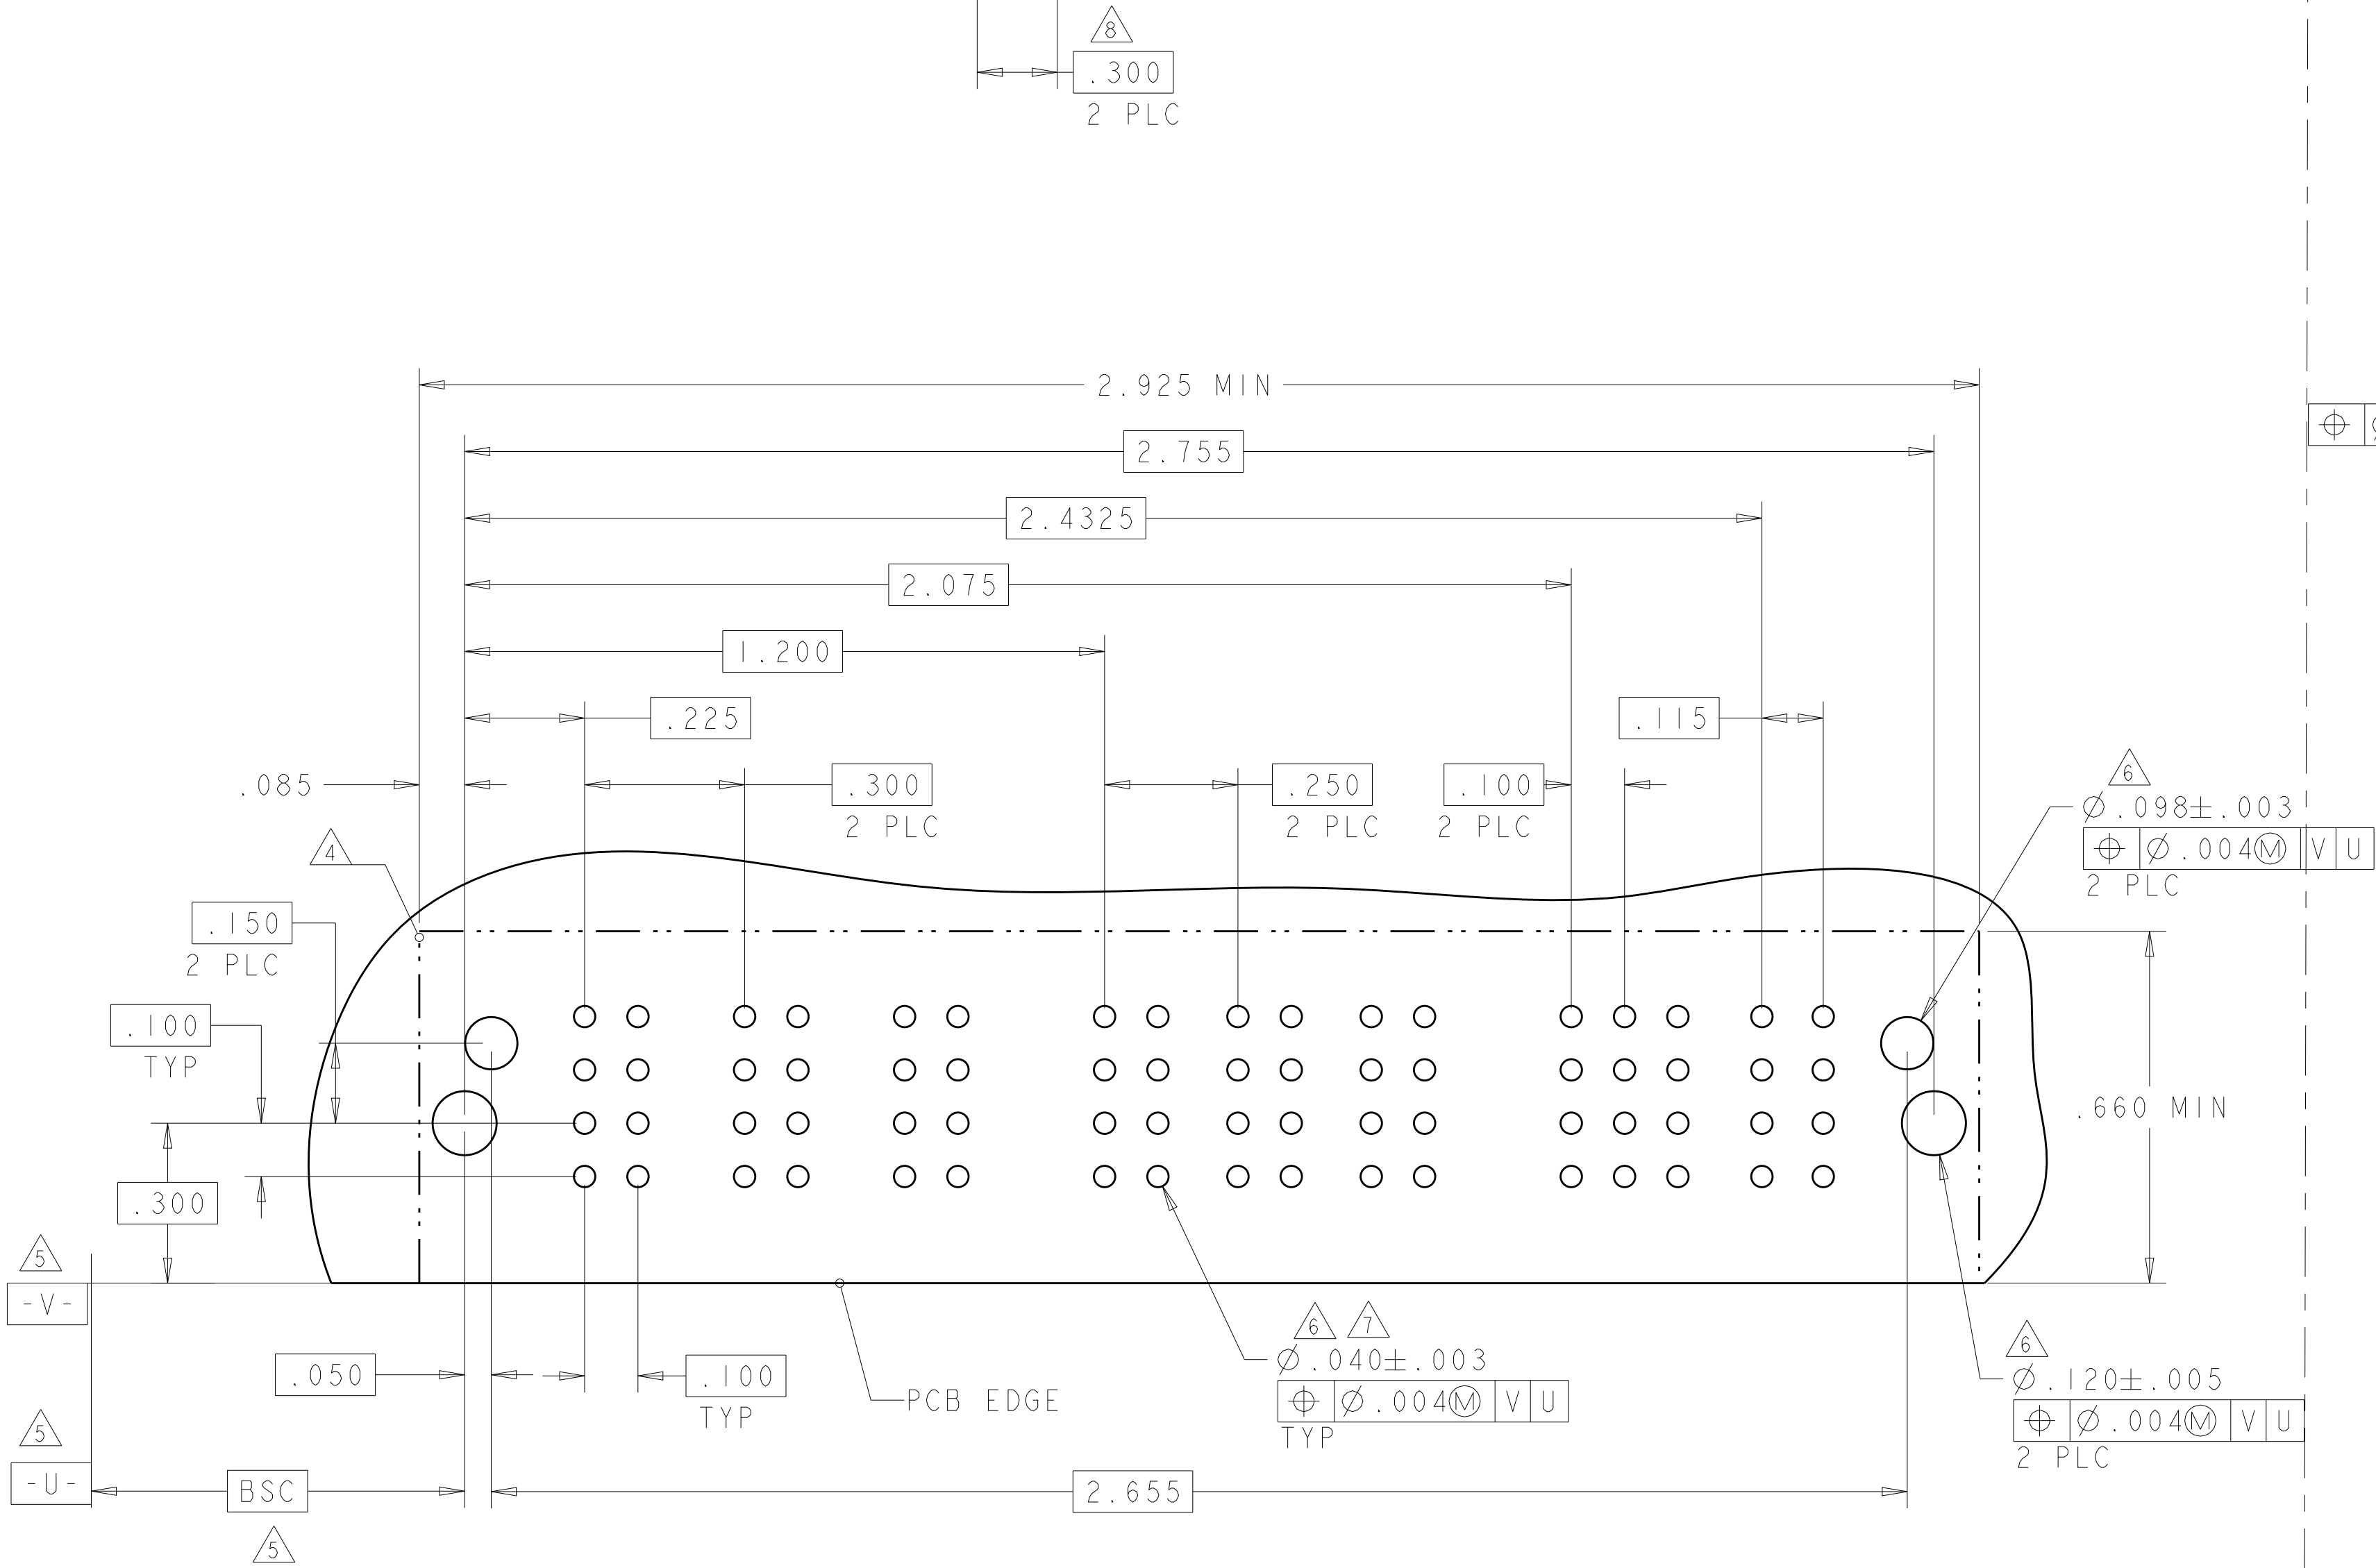


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	
5-6450830-7	D		TM	TM	TM	TM	J	J	J	J	J	J	TM	TM	TM	TM	
	C						K	K	K	K	K	K					
	B						N	N	N	N	N	N					
	A	HD					S	S	S	S	H	HD					
4P + 24S + 4P																	

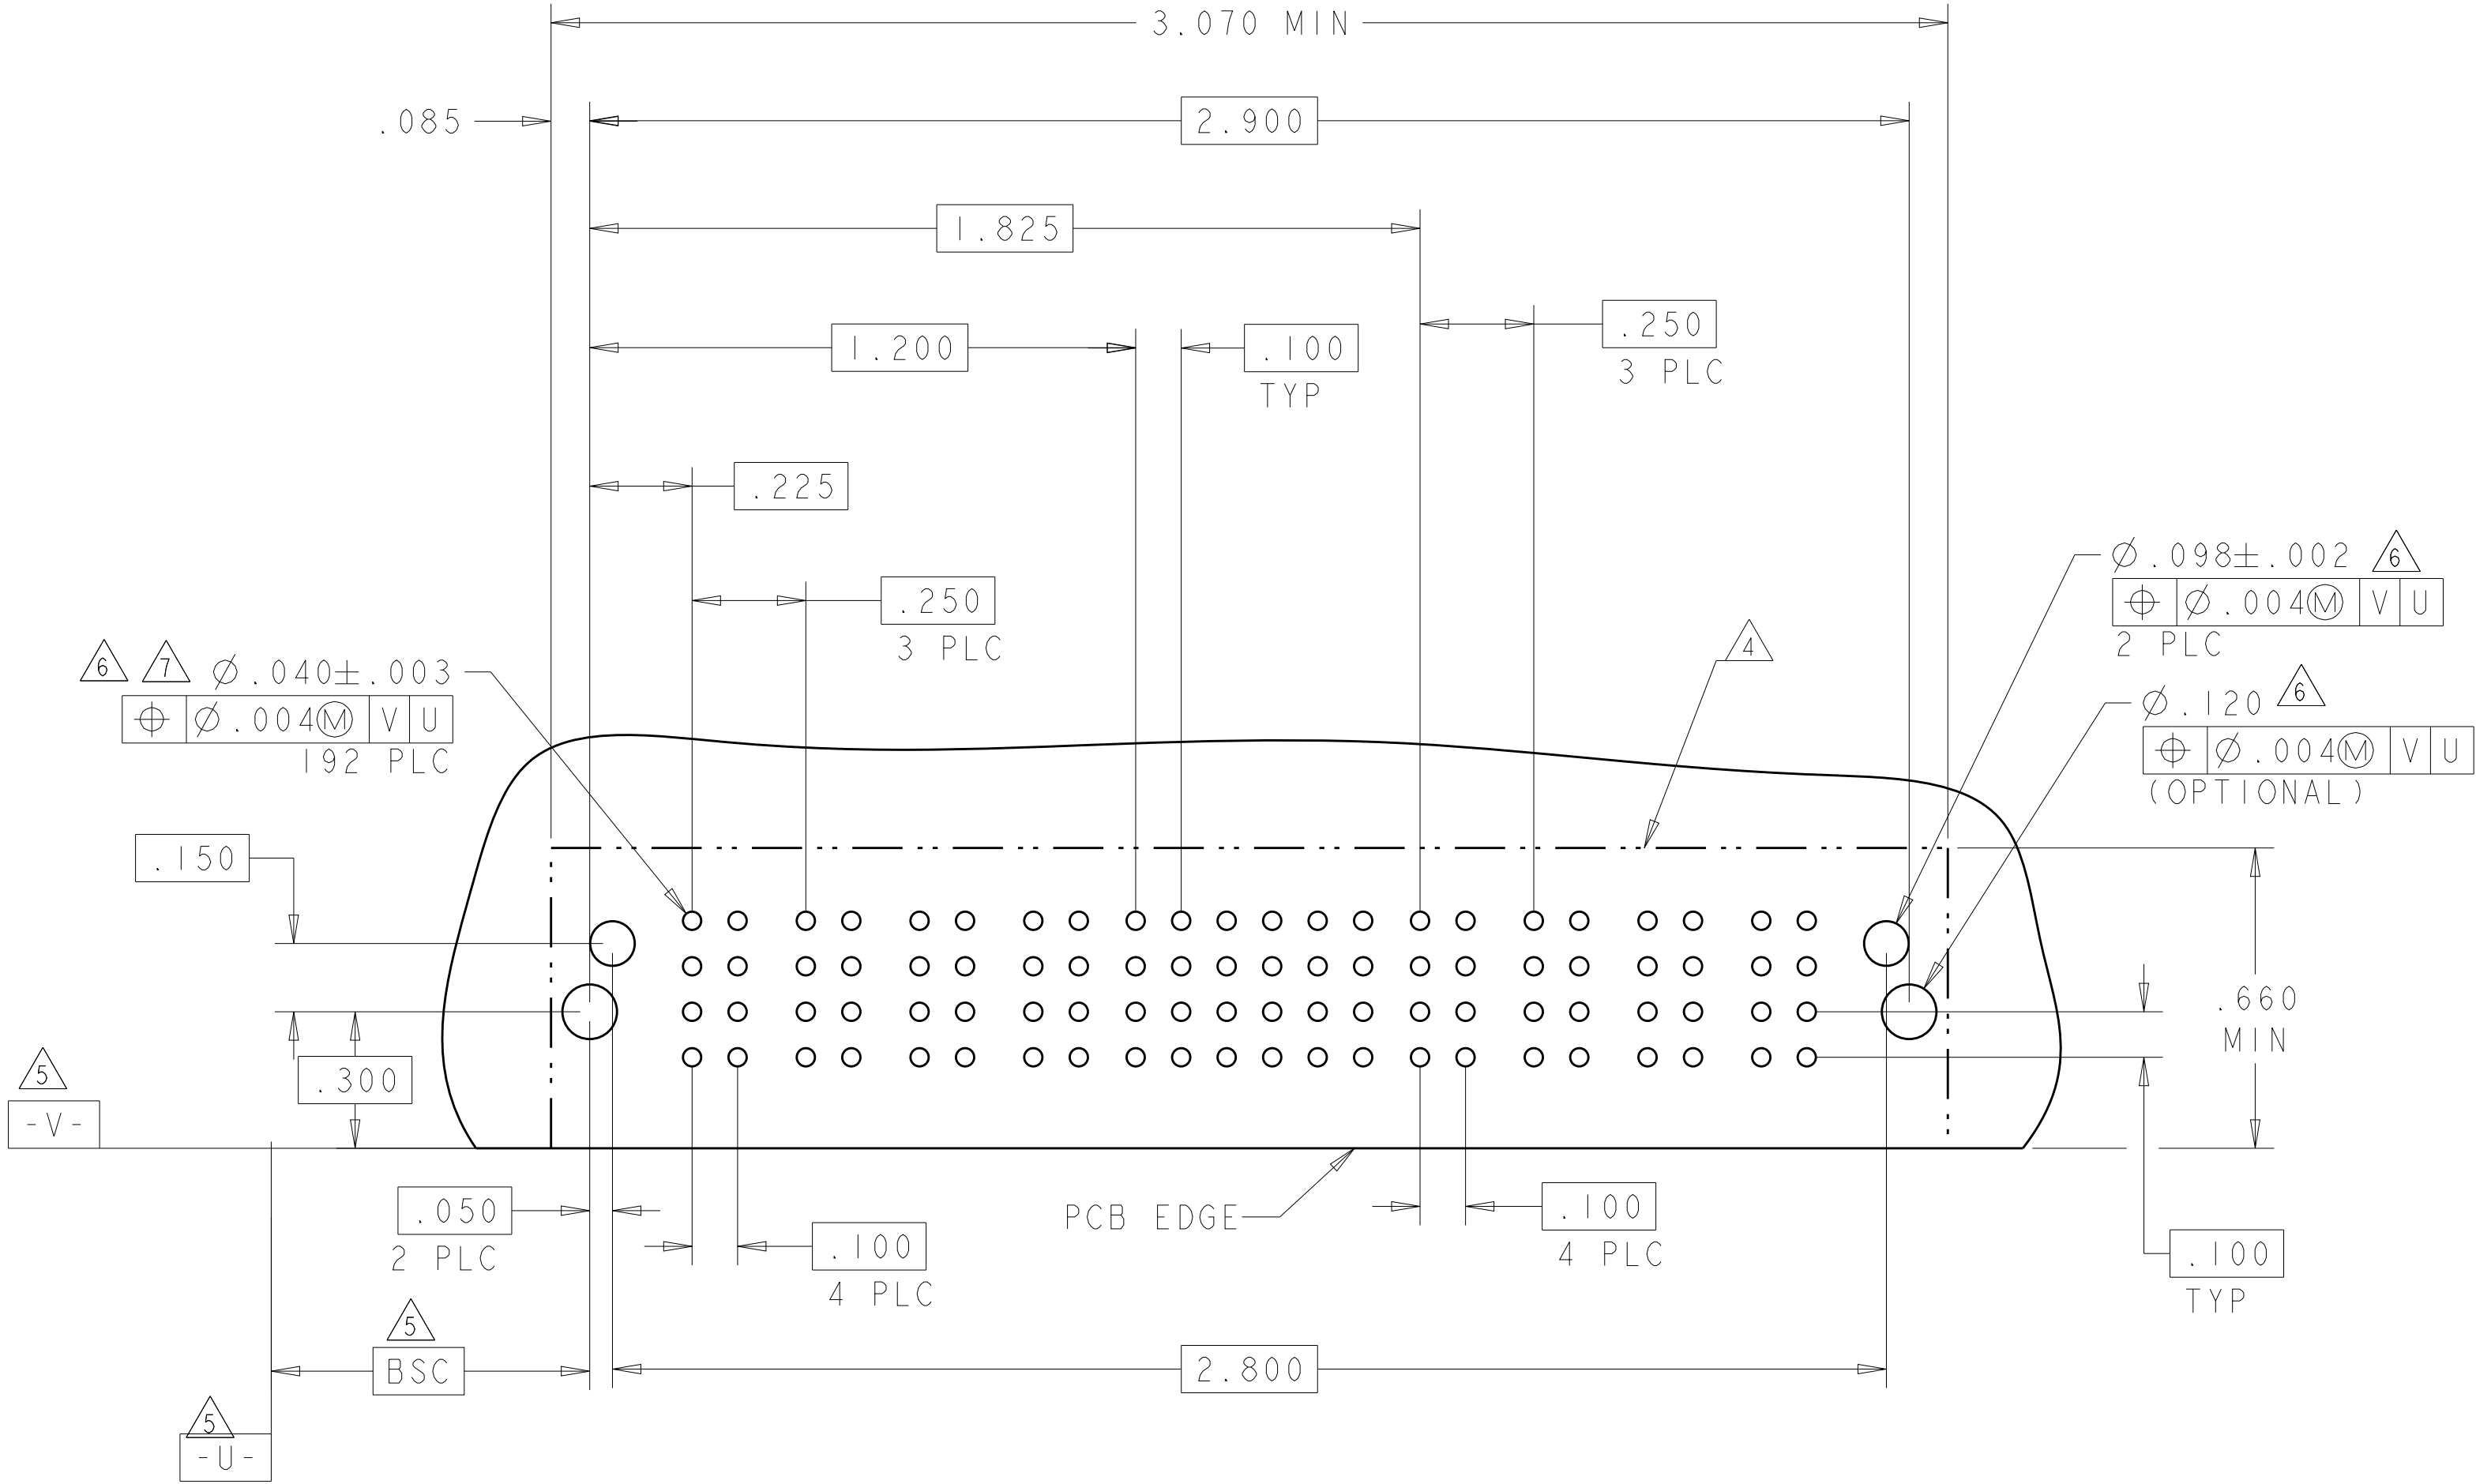

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO	10APR2007		
		CHK S. ZHAO	10APR2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±"		PRODUCT SPEC	
		1 PLC ±"		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
		3 PLC ±.005		114-13251	
		4 PLC ±.0020		WEIGHT	
		ANGLES ±2°		CUSTOMER DRAWING	
MATERIAL		FINISH		SCALE	
-		-		4:1	
				SHEET 29 OF 42	
				REV S2	



N6

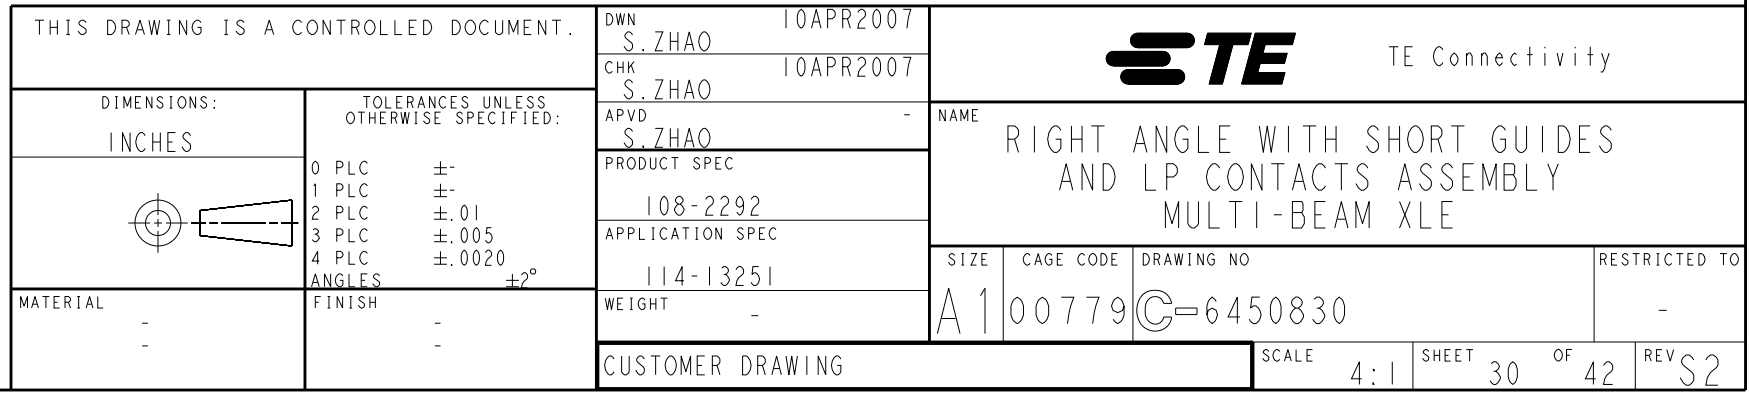


LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		-		SEE SHEET 1		-	-	-

PART NUMBER	ROWS		POWER					SIGNAL						POWER	LOW POWER							
			P1	P2	P3	P4	P5	1	2	3	4	5	6	P6	LP1	LP2	LP3	LP4	LP5	LP6	LP7	
6-6450830-2	D		TM	TM	TM	TM	J	J	J	J	J	J	TM			LM		LM		LM		
	C						K	K	K	K	K	K										
	B						N	N	N	N	N	N										
	A						S	S	S	S	S	S										
5HDP + 24S + 1P + 7LP																						

NO CONTACTS LOADED

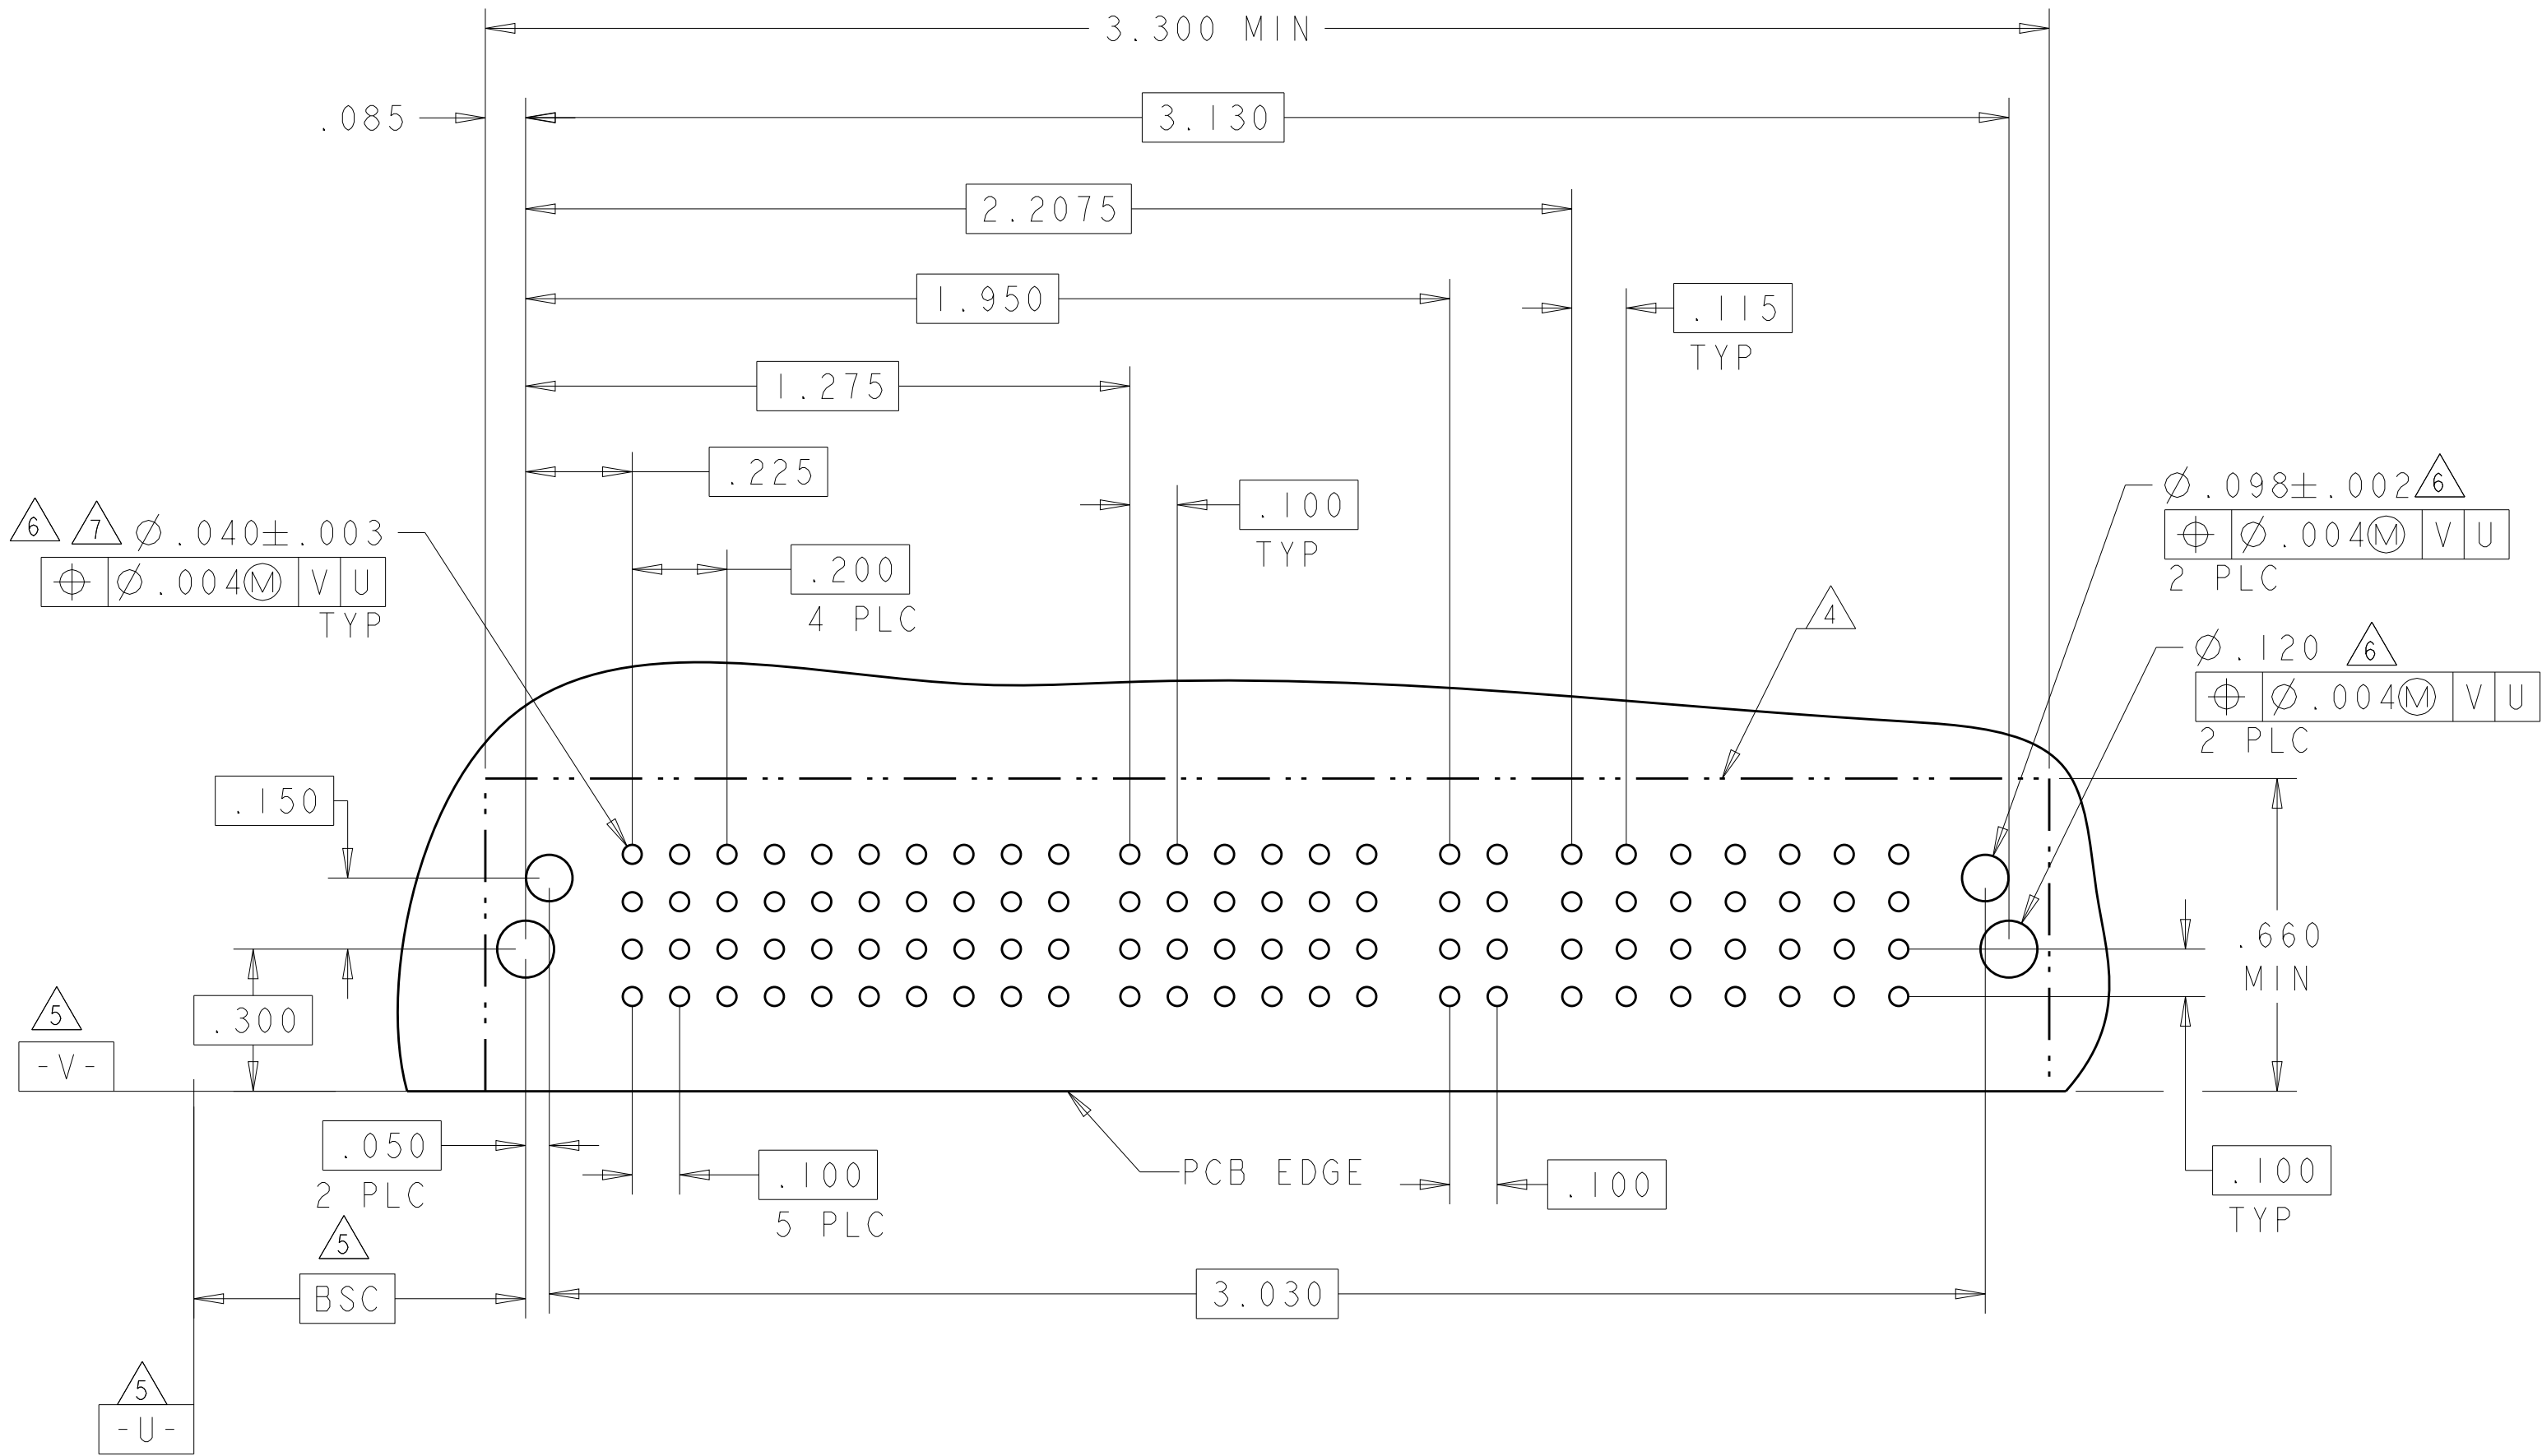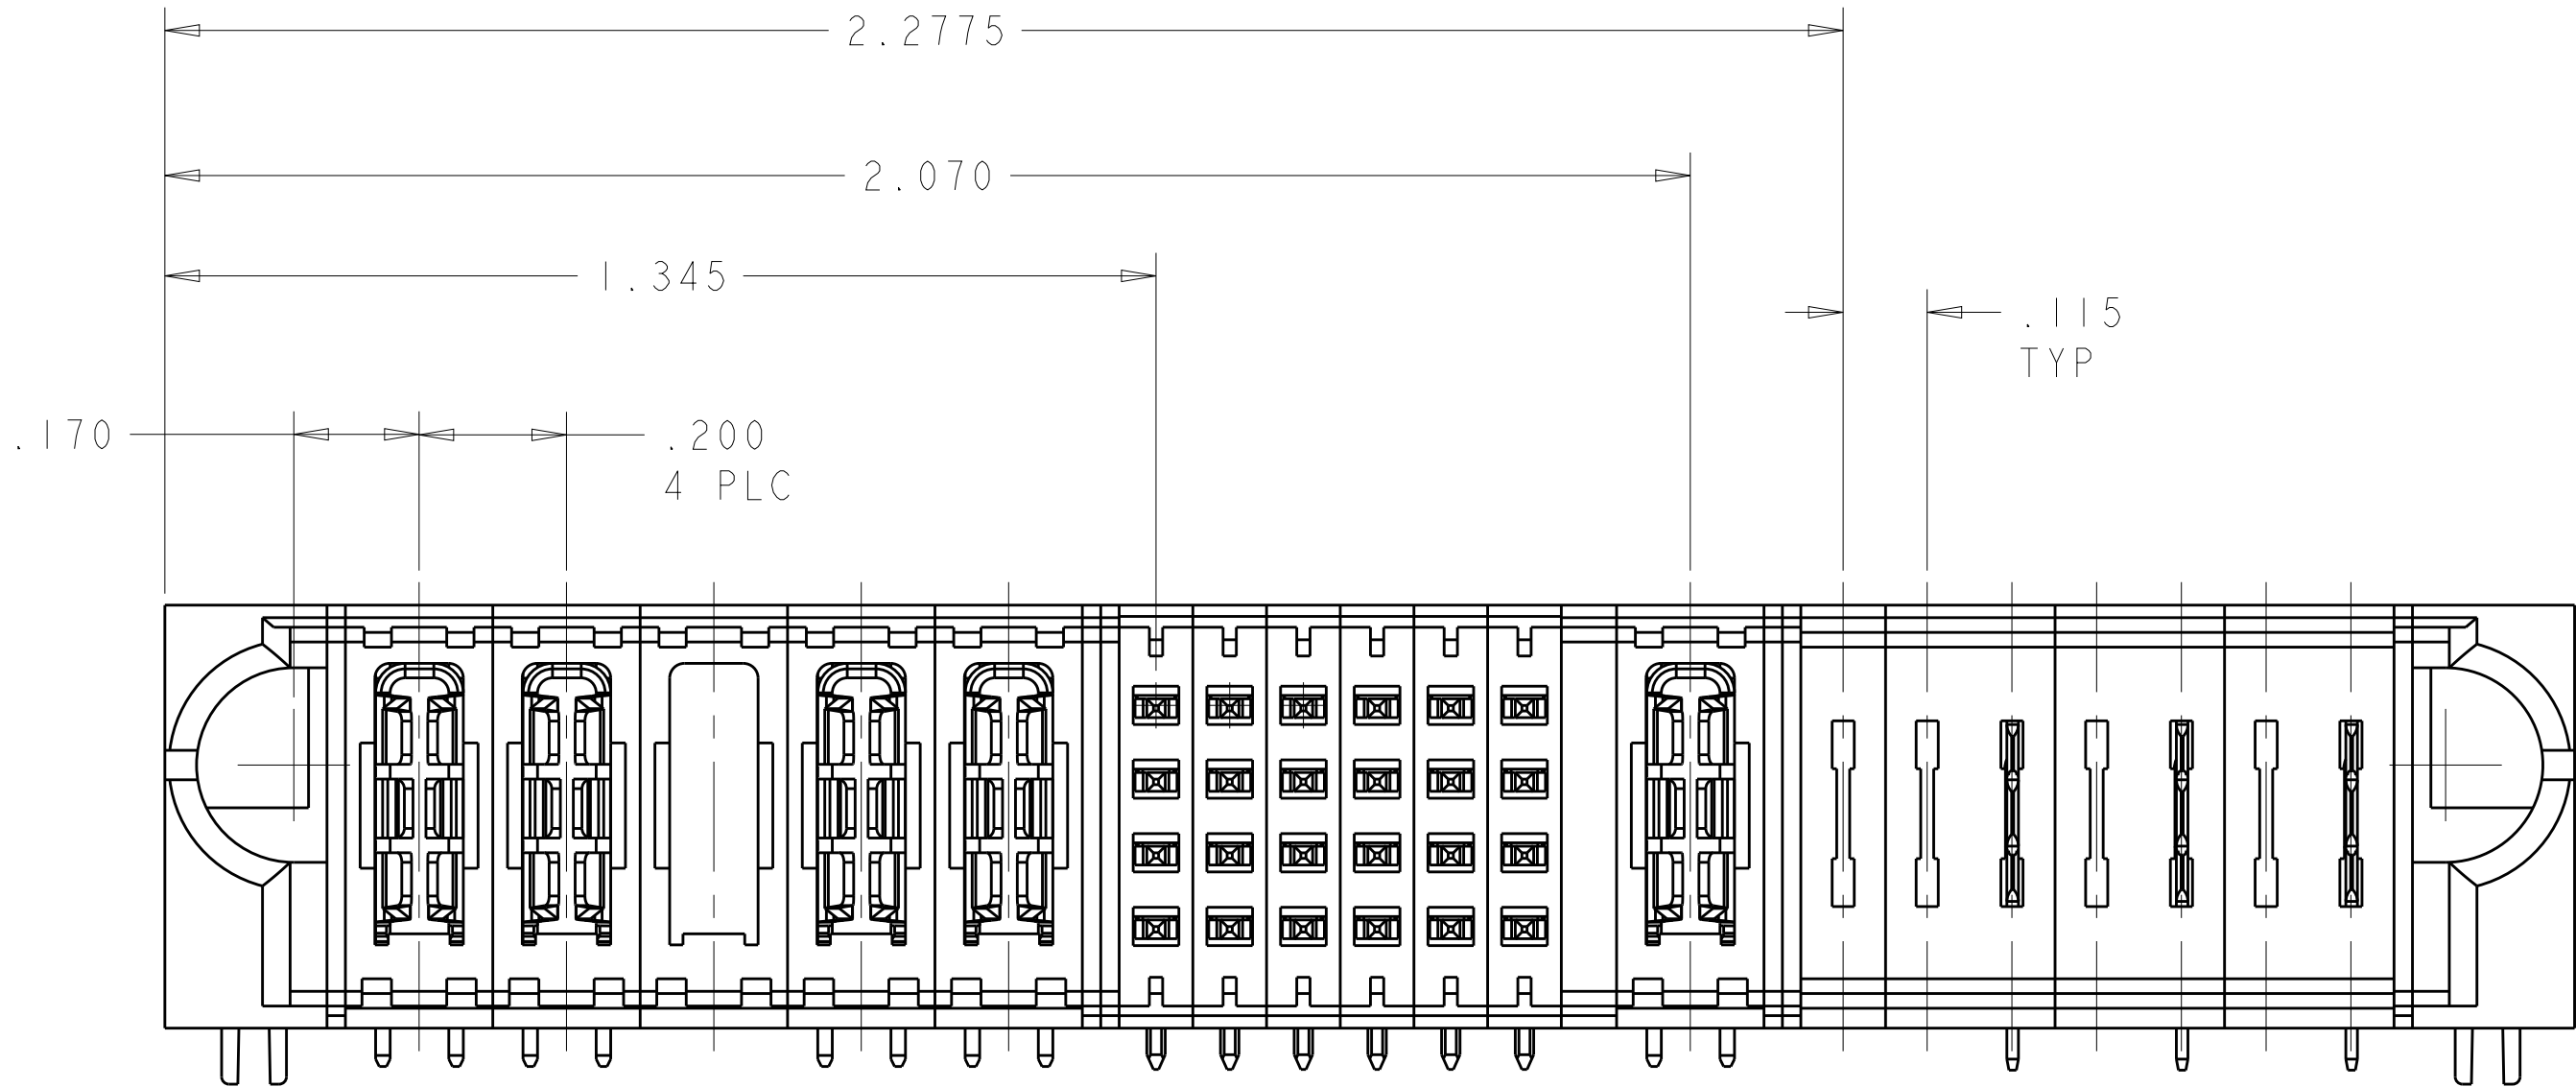


PART NUMBER	ROWS		POWER			SIGNAL					POWER			
			P1	P2	P3	1	2	3	4	5	P4	P5	P6	
6-6450830-4	D		TM	TM	TM	J	J	J	J	J	TM	TM	TM	
	C					K	K	K	K	K				
	B					N	N	N	N	N				
	A					HD	S	S	S	S				
3P + 20S + 3P														

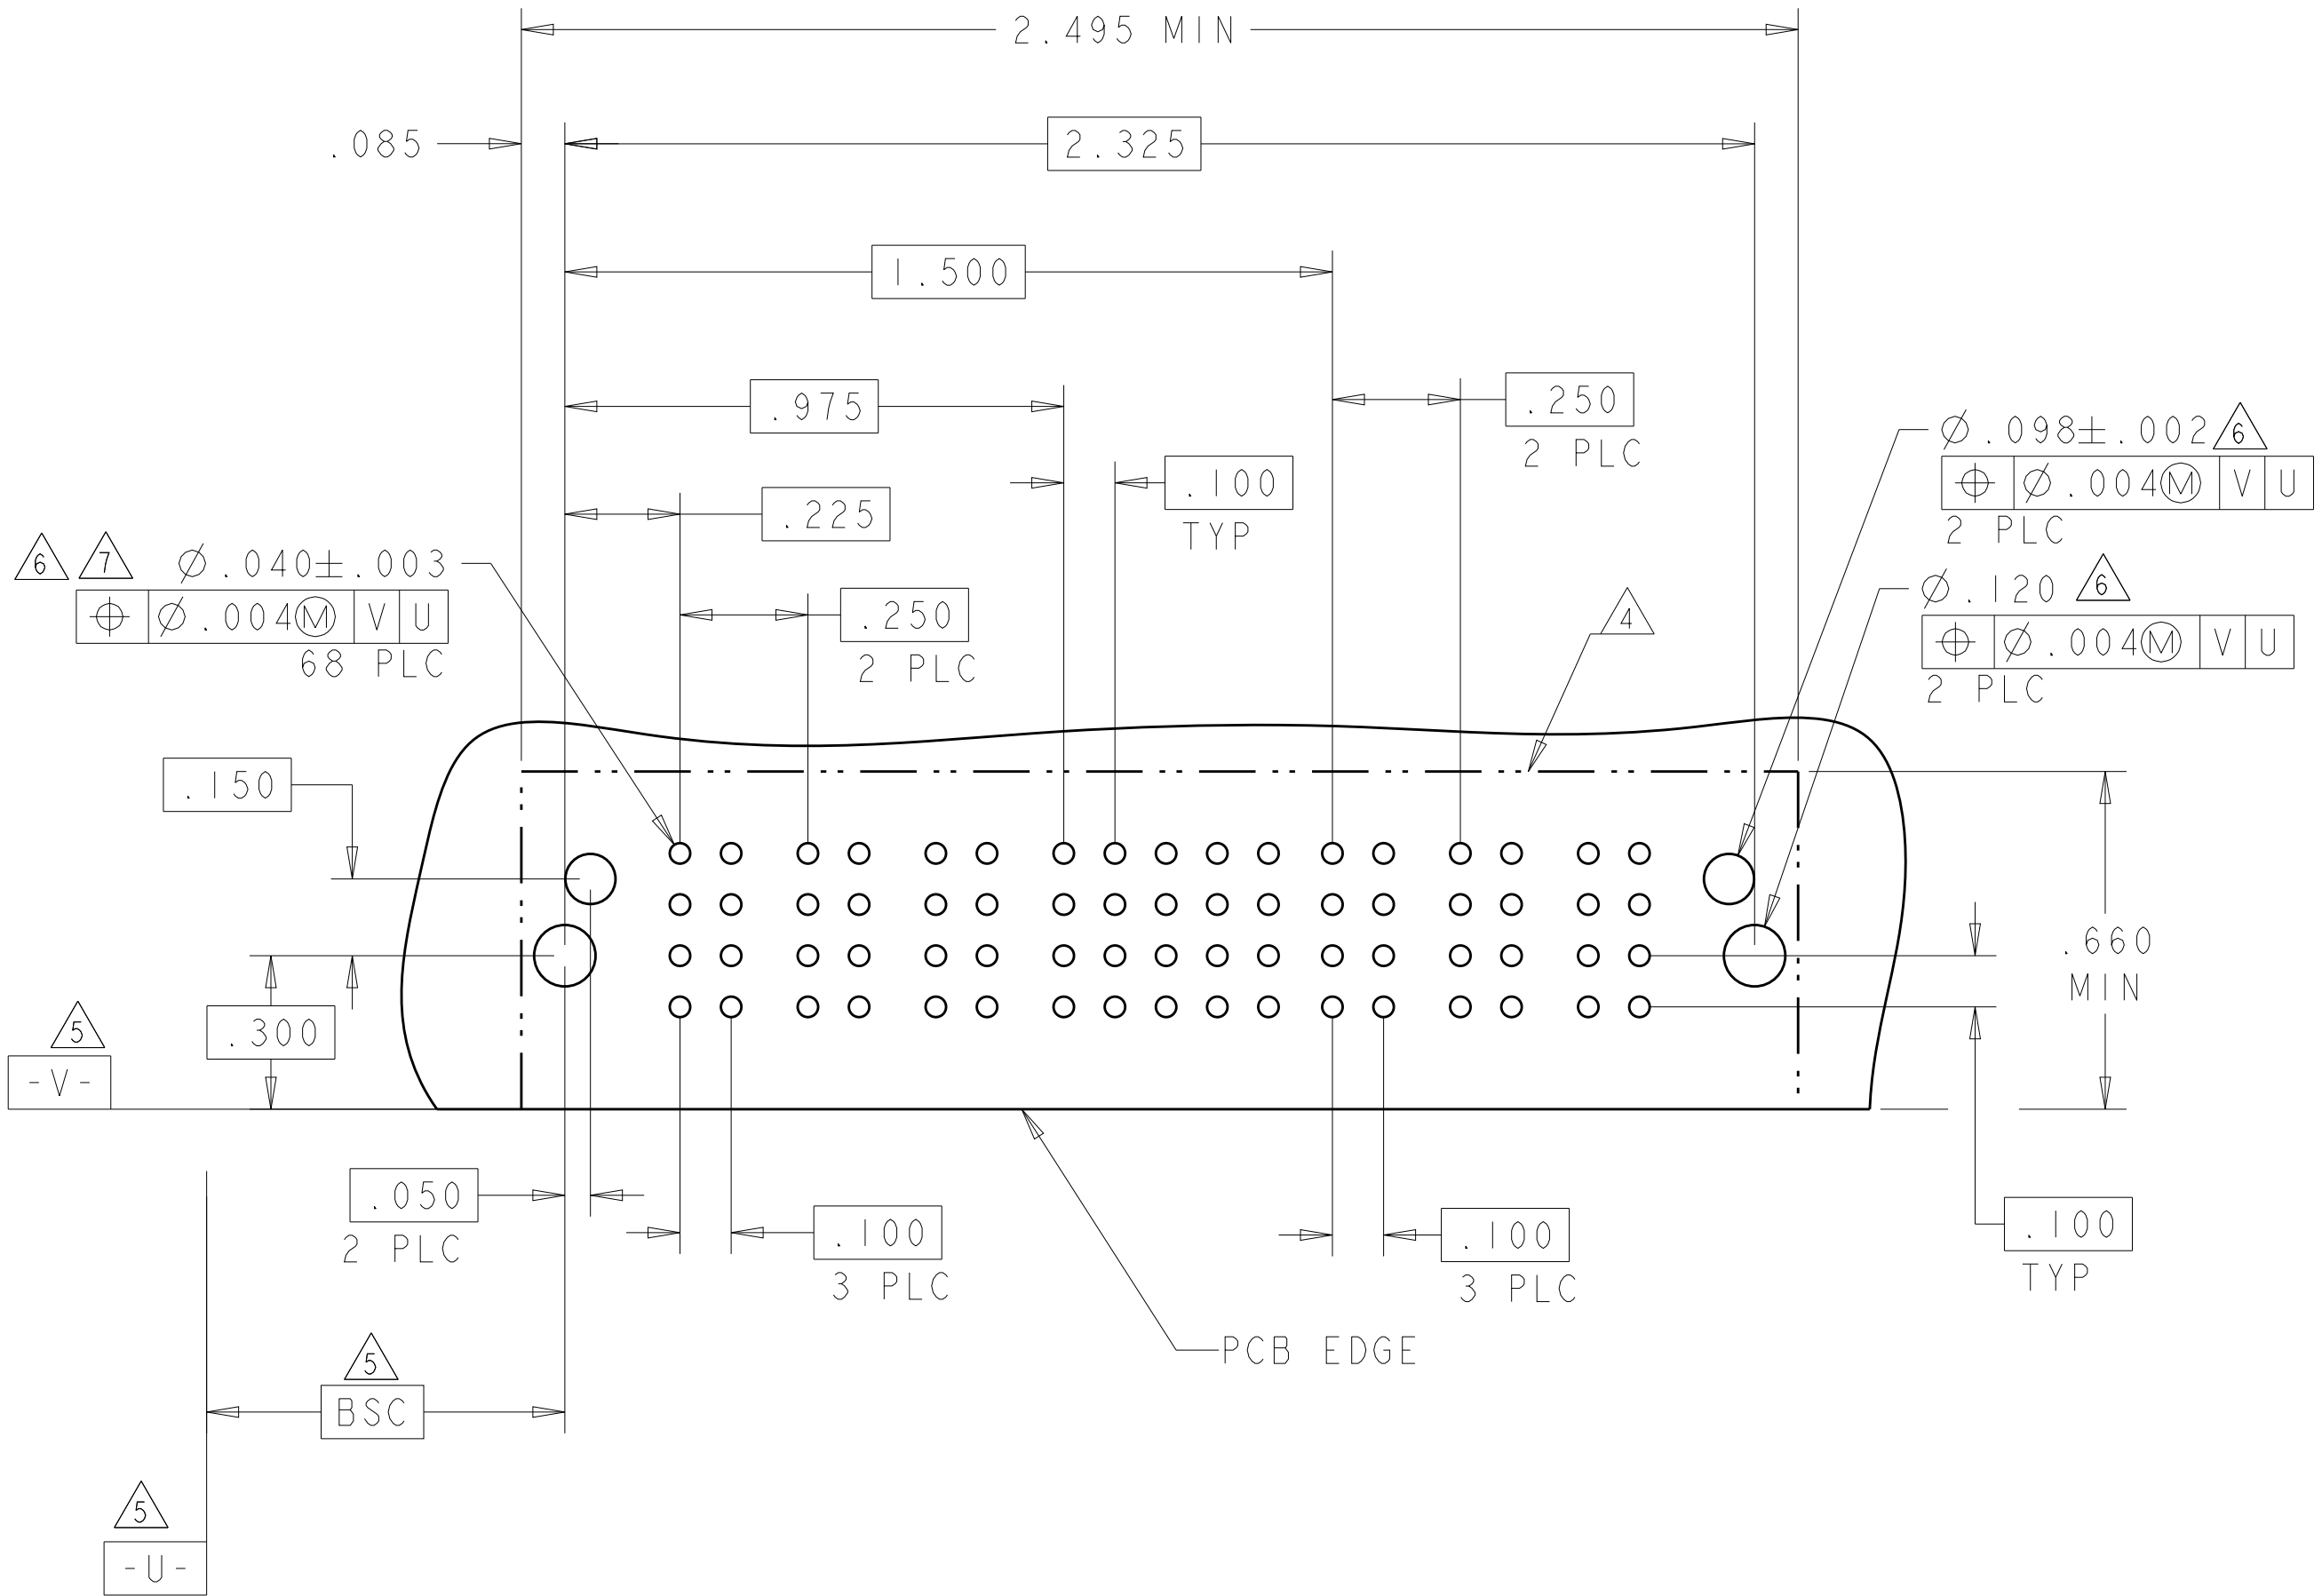


THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	S. ZHAO	10APR2007	 TE Connectivity										
				CHK	S. ZHAO	10APR2007											
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:				NAME		RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE									
INCHES						PRODUCT SPEC											
		0 P/LC ±.1				108-2292		SIZE									
		1 P/LC ±.1															
		2 P/LC ±.05				APPLICATION SPEC											
		3 P/LC ±.05															
		4 P/LC ±.0020															
ANGLES		±.2°				114-13251		RESTRICTED TO									
FINISH						WEIGHT											
MATERIAL						CUSTOMER DRAWING		SCALE		4:1		SHEET 31		OF 42		REV. S2	

PART NUMBER	ROWS		POWER					SIGNAL						POWER				
			P1	P2	P3	P4	P5	1	2	3	4	5	6	LP1	LP2	LP3	LP4	
6-6450830-6	D		TM	TM	TM	TM	TM	J	J	J	J	J	J	LMF	LM	LM		
	C							K	K	K	K	K	K					
	B							N	N	N	N	N	N					
	A							S	S	S	S	S	S					
5ACP + 24S + 4LP																		

NO CONTACTS LOADED

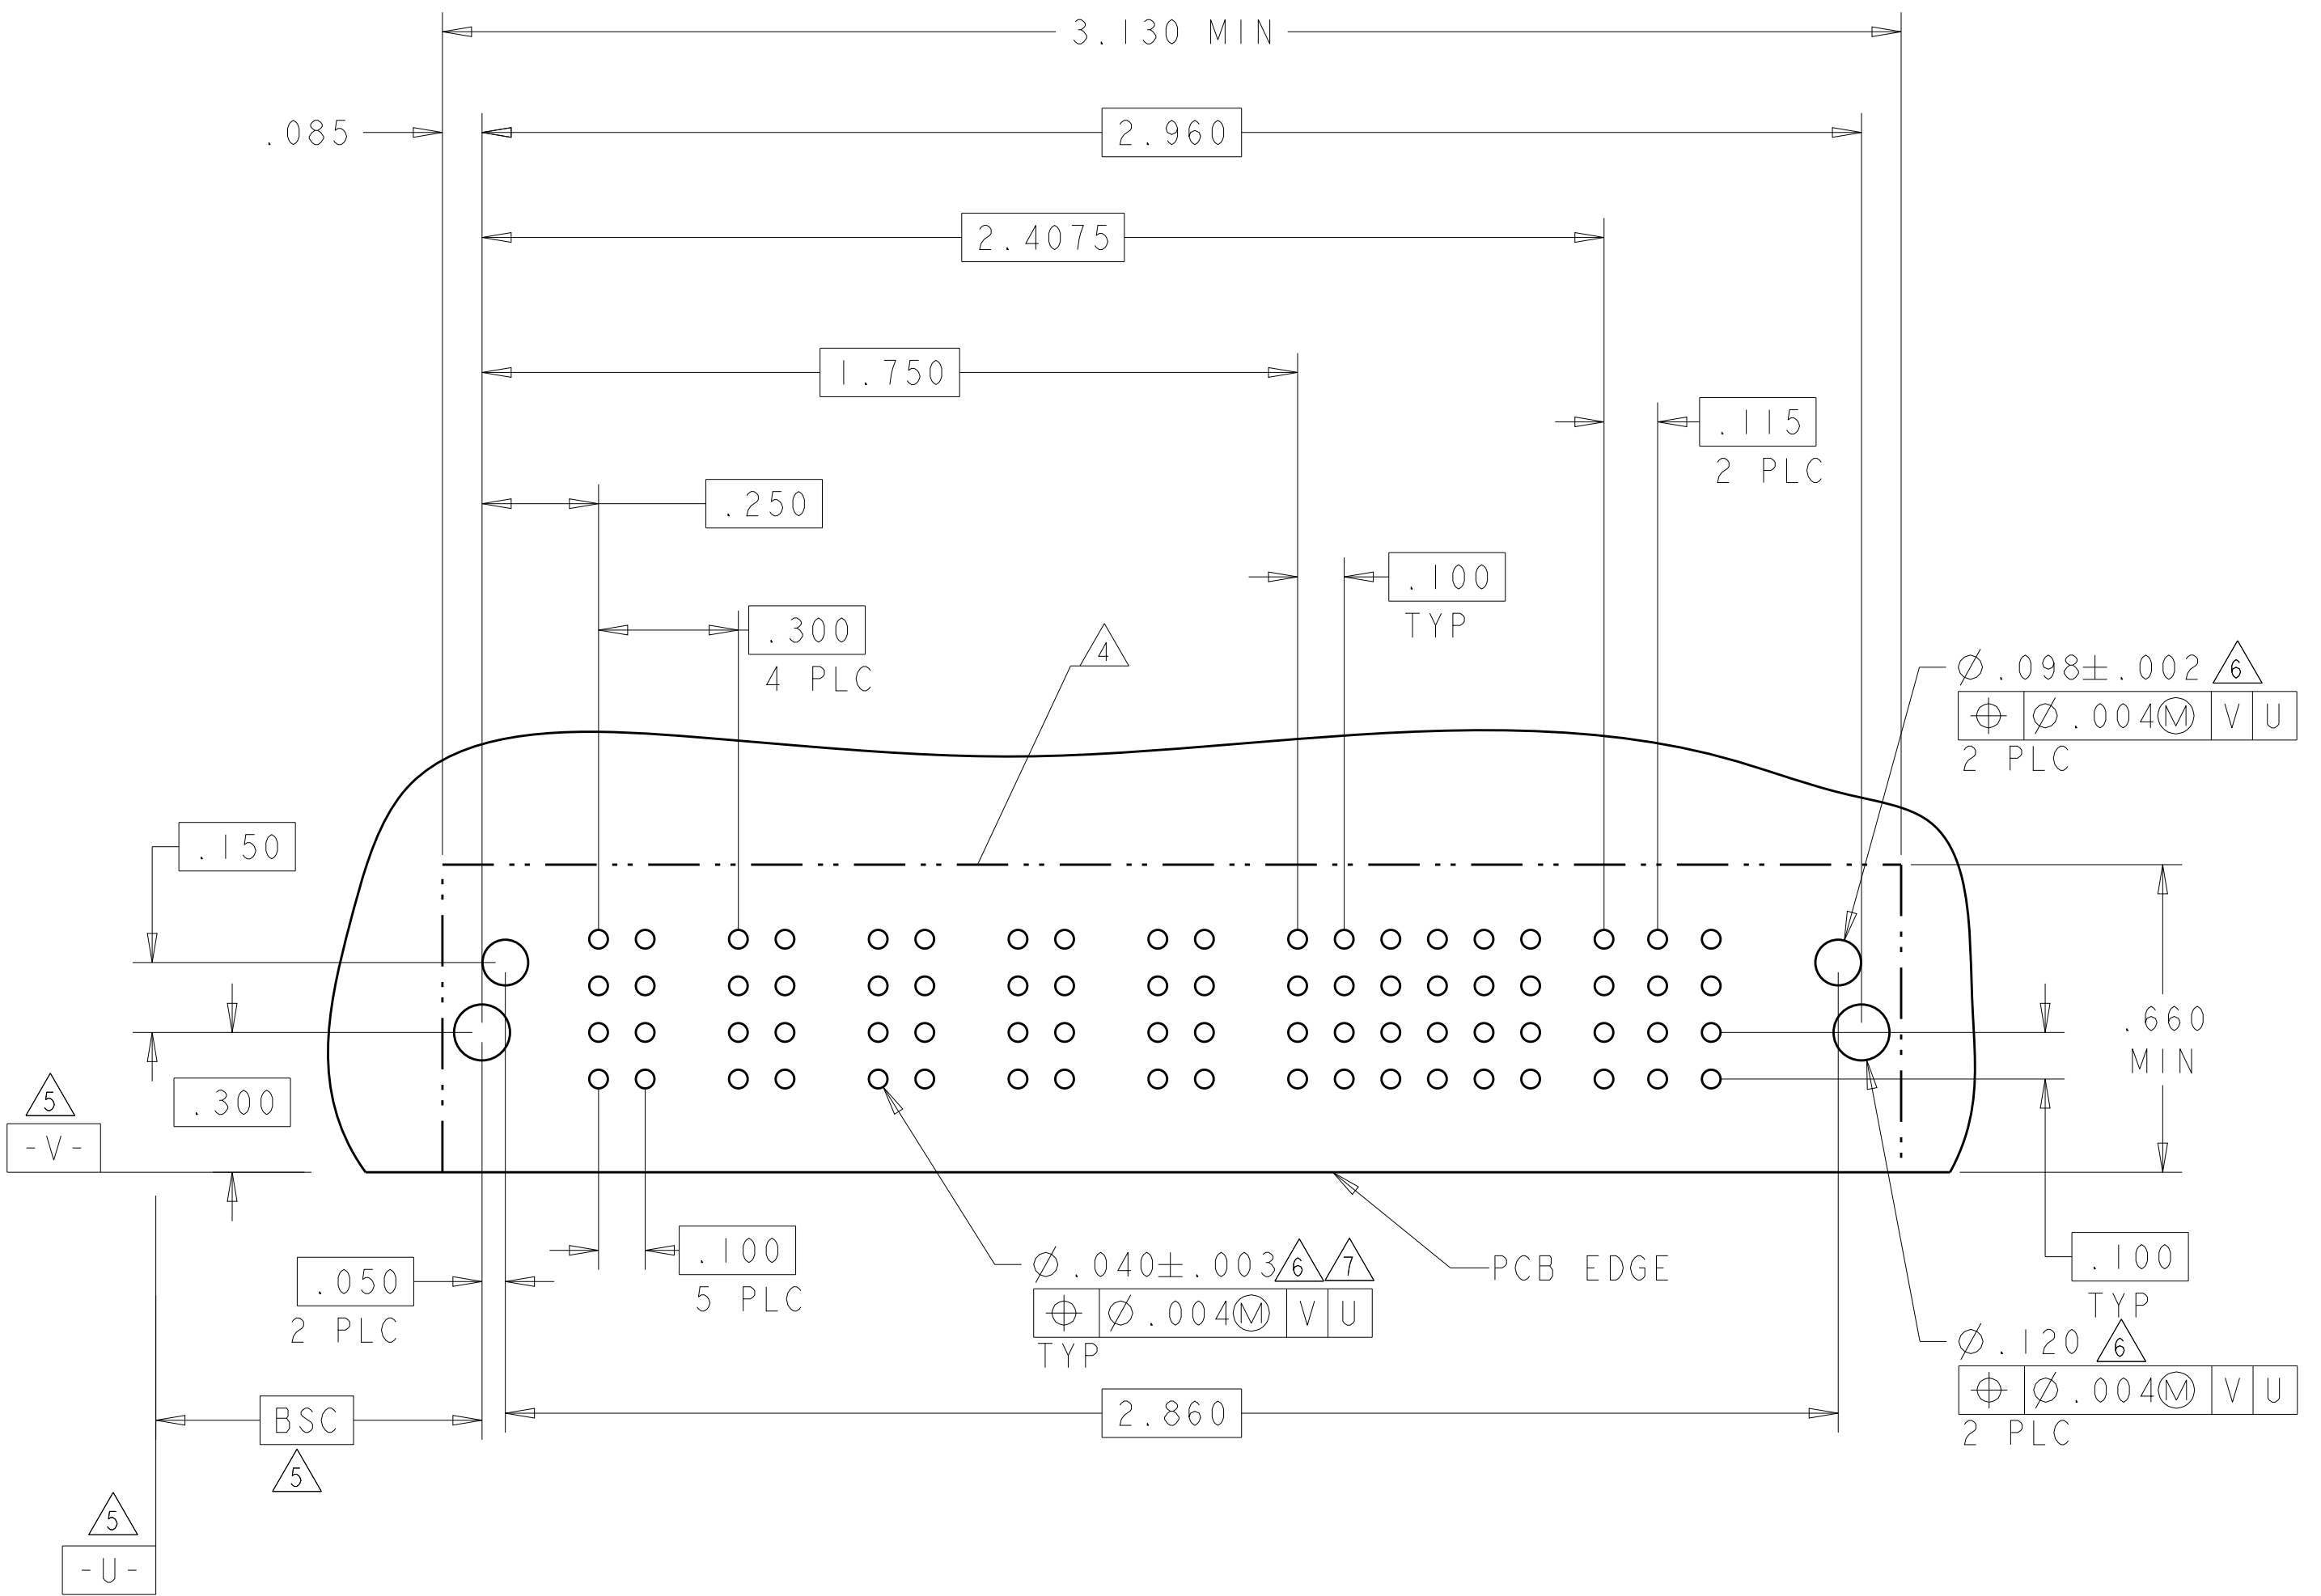4805 (3/11)

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	S_ZHAO	10APR2007			TE Connectivity					
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CMP	S_ZHAO		NAME	RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE						
INCHES				APP'D	S_ZHAO	-								
		0 P/LC ± .		PRODUCT SPEC										
		1 P/LC ± .		108-2292										
		2 P/LC ± .01		APPLICATION SPEC			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
		3 P/LC ± .005		114-13251										
		4 P/LC ± .0020		ANGLES			A1	00779	C=6450830	-				
		FINGER		± .002										
MATERIAL		-		CUSTOMER DRAWING			SCALE	4:1	SHEET	33	OF	42	REV'S	2

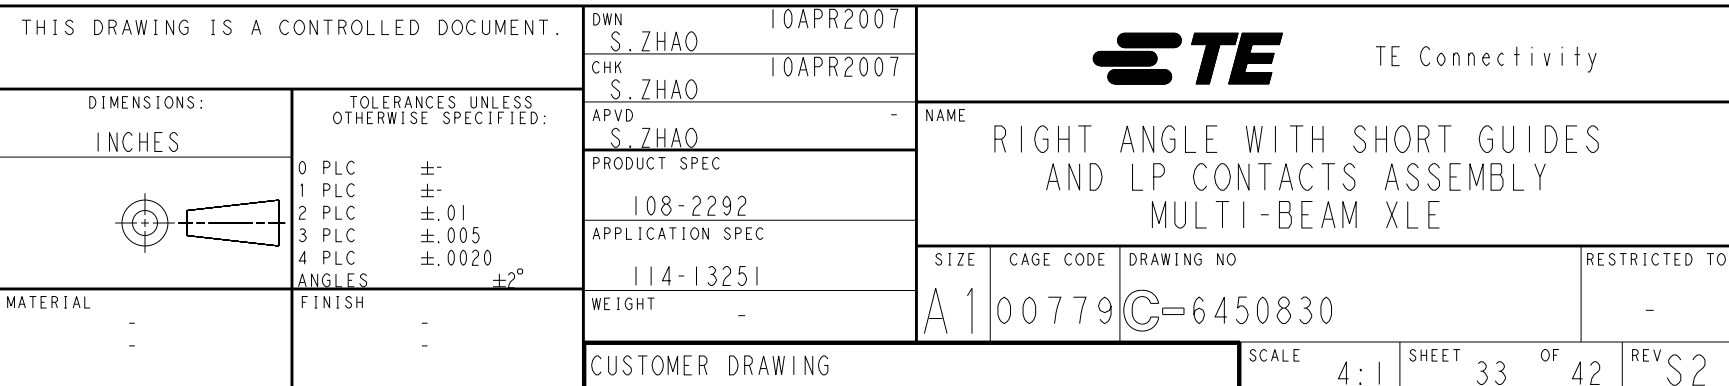

PART NUMBER	ROWS		LOW POWER						SIGNAL																								LOW POWER						
			LP1	LP2	LP3	LP4	LP5	LP6	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20	21	22	23	24	LP7	LP8	LP9	LP10				
6-6450830-9	D		LMF	LM	LM	LM	LMF	LM	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J				
	K								K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	N								N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
	A	HD							S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S
6LP + 96S + 4LP																																							


Technical drawing of a PCB layout showing dimensions, tolerances, and material specifications.

Overall dimensions and tolerances:


- Overall width: 4.120 MIN
- Overall height: $.660 \text{ MIN}$

Key features and dimensions:


- Top edge dimensions: $.085$, 3.950 , 3.3975 , $.115$ (3 PLC).
- Bottom edge dimensions: $.150$, $.300$, $.050$ (2 PLC), 3.850 , $.100$ (TYP), $.120$ (2 PLC).
- Internal dimensions: $.940$, $.100$ (TYP), $.2075$, $.115$ (5 PLC).
- Central feature: A large rectangular area with rounded corners, containing a grid of small circles (vias or holes).
- Material specifications: $\phi .098 \pm .002$ (2 PLC), $\phi .040 \pm .003$ (TYP), $\phi .004$ (M), V, U.
- Other labels: PCB EDGE, BSC, -V-, -U-.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S_ZHAO 10APR2007		 TE Connectivity			
DIMENSIONS: INCHES 		CHG S_ZHAO 10APR2007					
		APVD S_ZHAO -					
		NAME					
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±°		PRODUCT SPEC 108-2292		RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE			
		APPLICATION SPEC 114-13251					
		MATERIAL -		WEIGHT -		SIZE A	
		FINISH -		CAGE CODE 00779		DRAWING NO C-6450830	
		CUSTOMER DRAWING		SCALE 4:1			
				SHEET 34 OF 42			
				REV S2			

Timing diagram for the 4-bit parallel adder showing the propagation of a carry signal through four full adder stages. The carry signal starts at 0.300 (3 PLC) and propagates through stages 1, 2, 3, and 4, with delays of 0.350, 0.250, and 0.275 respectively. The final carry output is 0.275 (8 PLC).

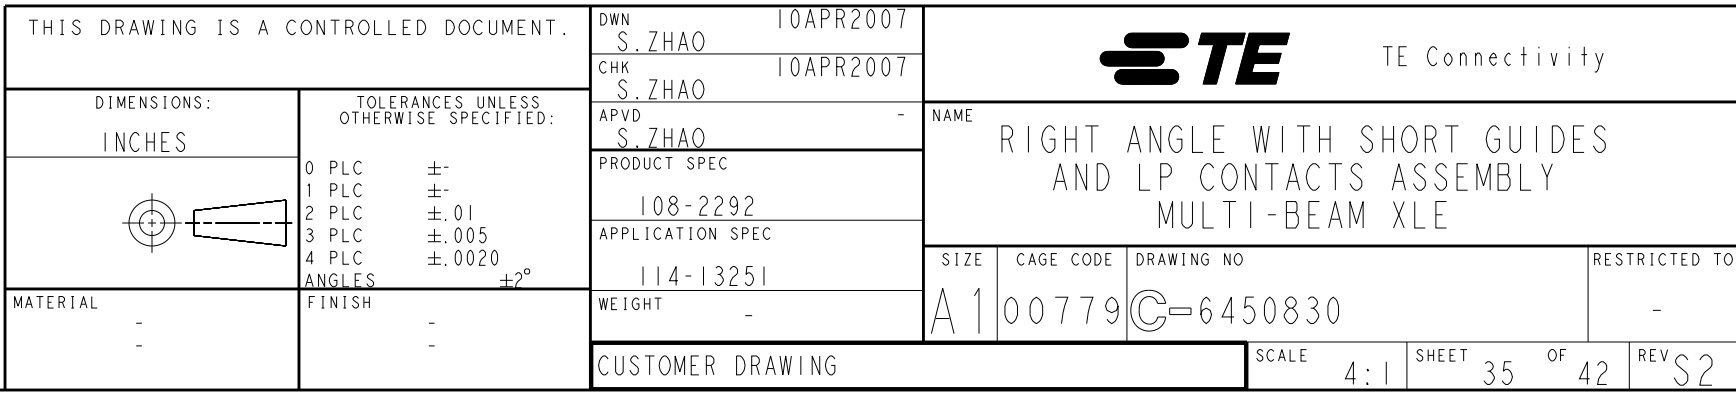

PART NUMBER	ROWS		POWER			SIGNAL				POWER			
			P1	P2	P3	1	2	3	4	P4	P5	P6	
7-6450830-3	D		TM	TM	TM	J	J	J	J	TM	TM	TM	
	K					K	K	K					
	N					N	N	N					
	S					H	H	S					
3P + 16S + 3P													


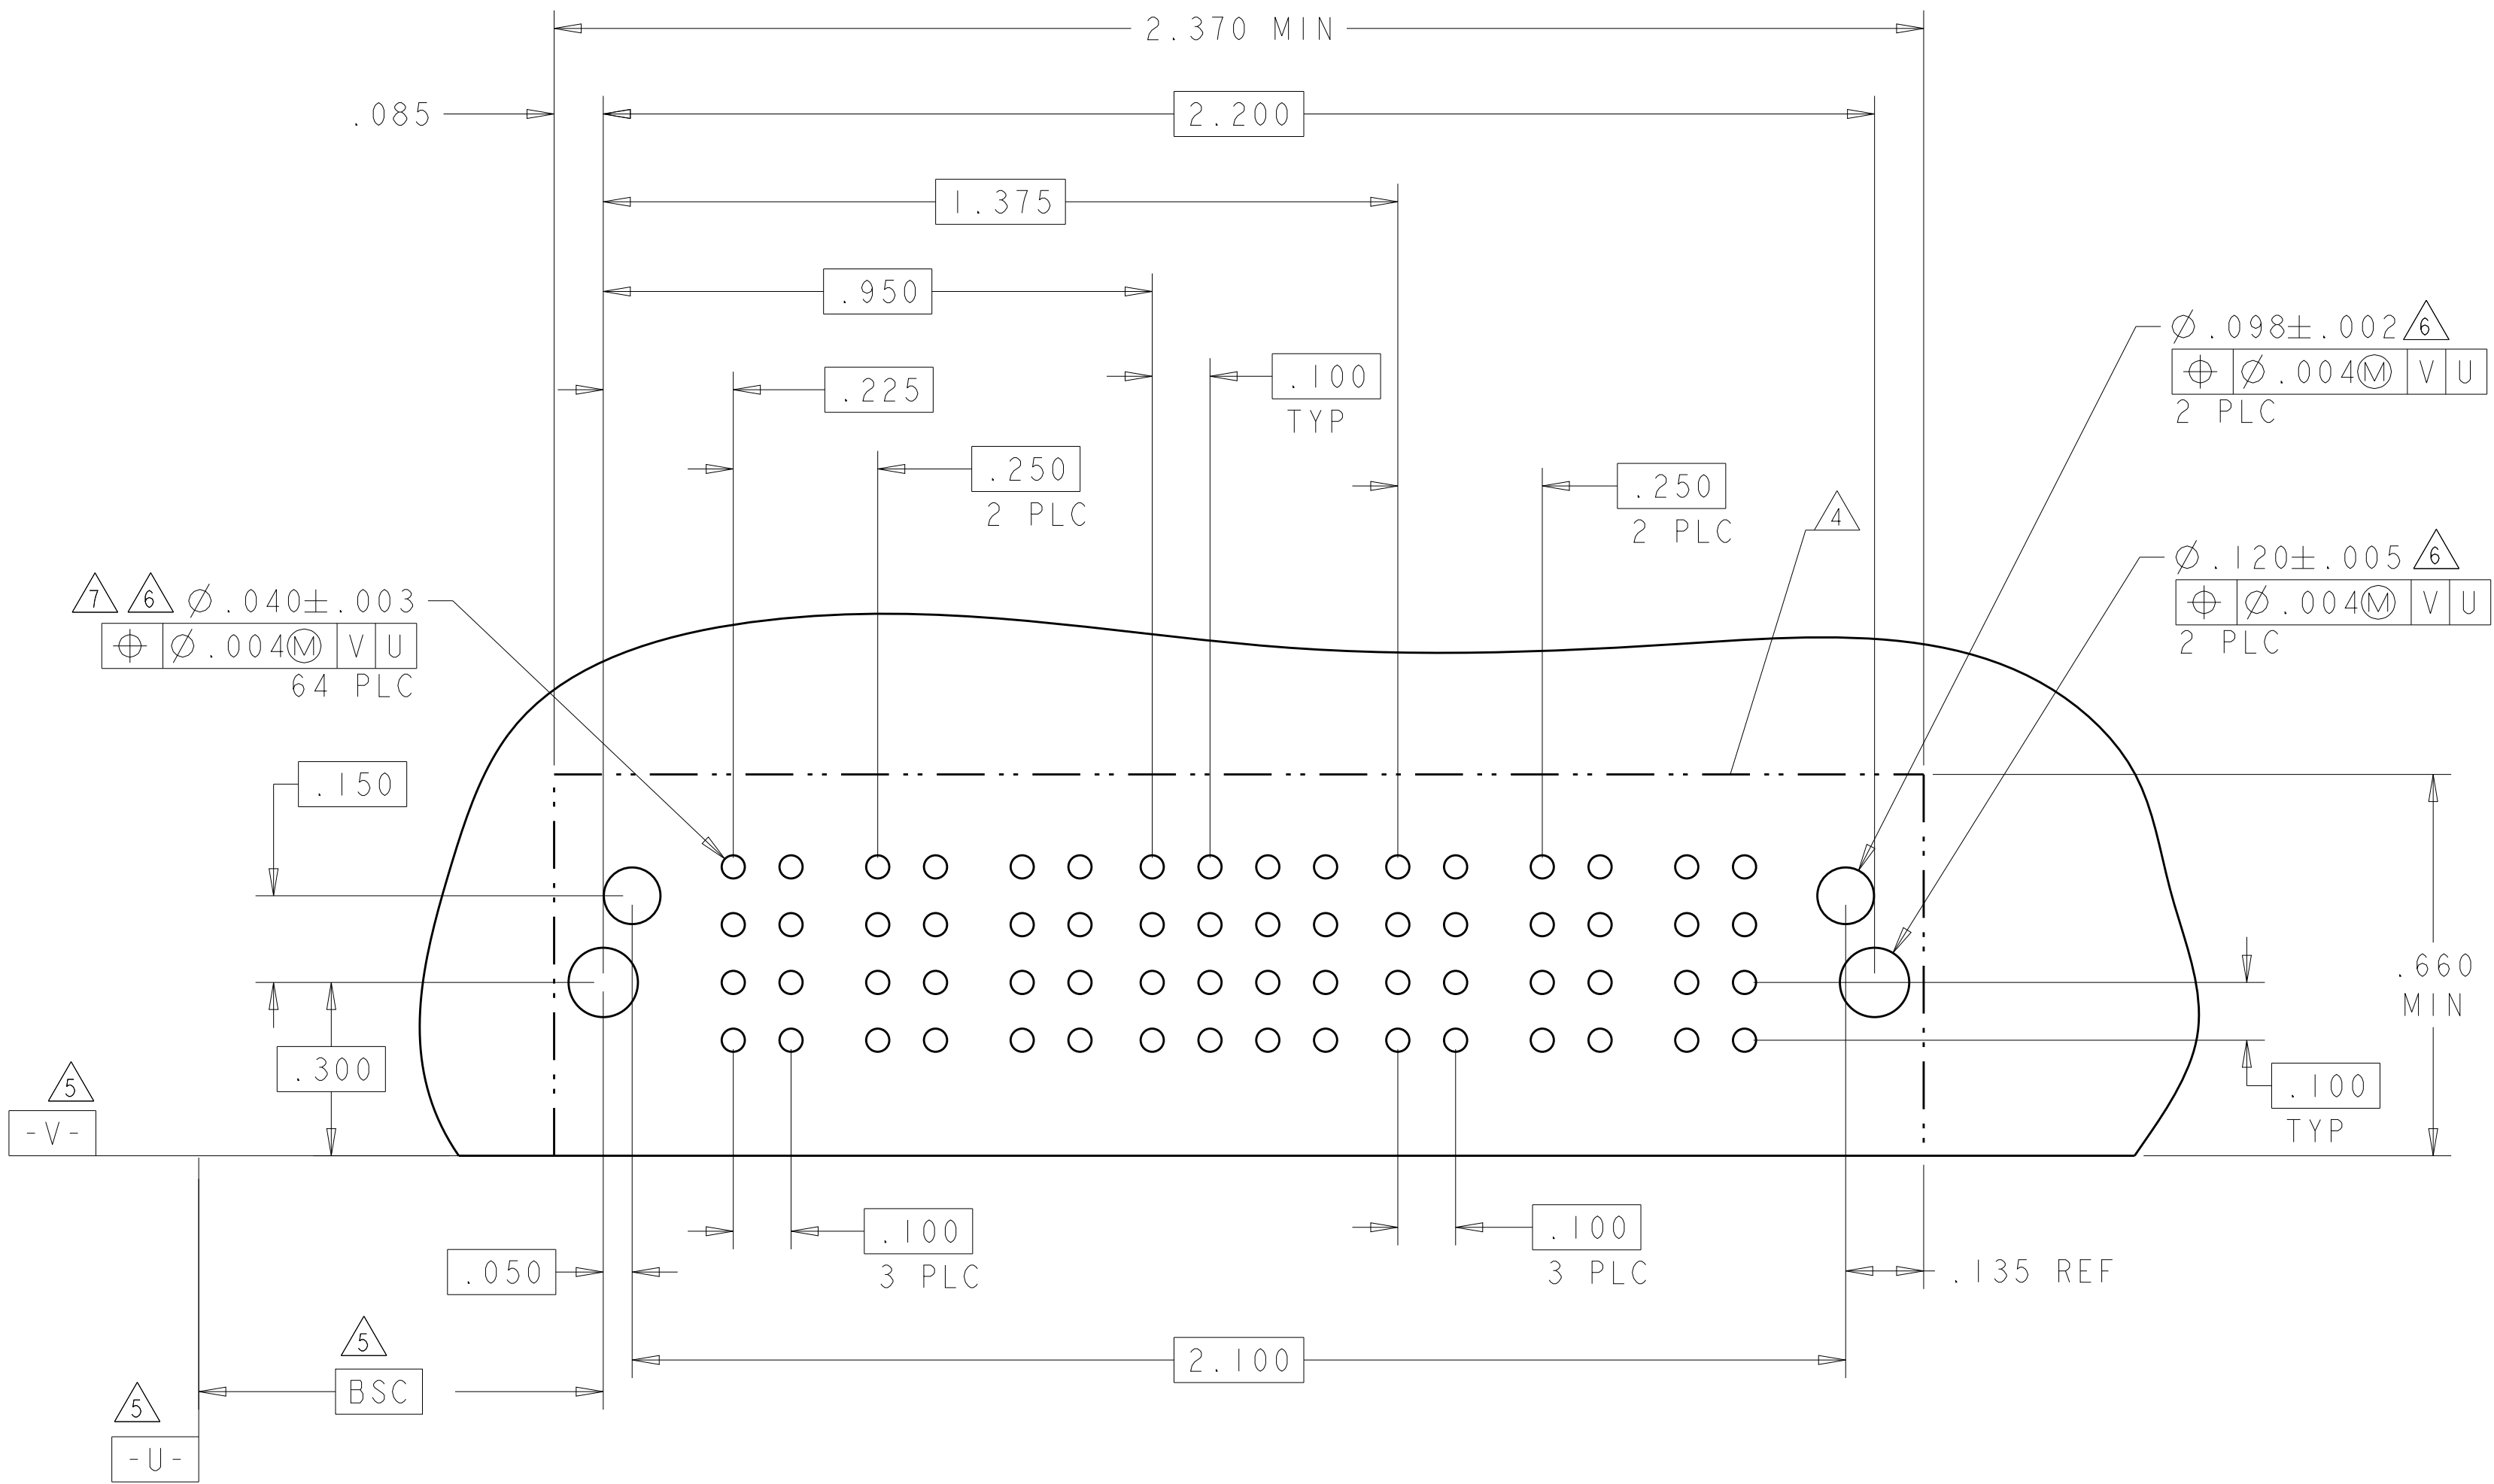
4805 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		LOW POWER			SIGNAL			LOW POWER				
			LP1	LP2	LP3	1	2	3	LP4	LP5	LP6	LP7	
7-6450830-6	D		LM	LM	LM	J	J	J	LM	LM	LM	LM	
	C					K	K	K					
	B					N	N	N					
	A					S	S	S					
3LP + 12S + 4LP													


PART NUMBER	ROWS		POWER				SIGNAL												POWER	
			P1	P2	P3	P4	1	2	3	4	5	6	7	8	9	10	11	12	P4	
7-6450830-7	D		TM	TM	TM	TM	E			E	J		J		J	E		E	TM	
	C						F	F	F	F		K		K		F		F		
	B						G		G		N		N		N	G		N		
	A						H	H	H	H	H		S		H		H			
4P + 48S + 1P																				

BLANK SIGNAL PINS ARE UNLOADED PINS

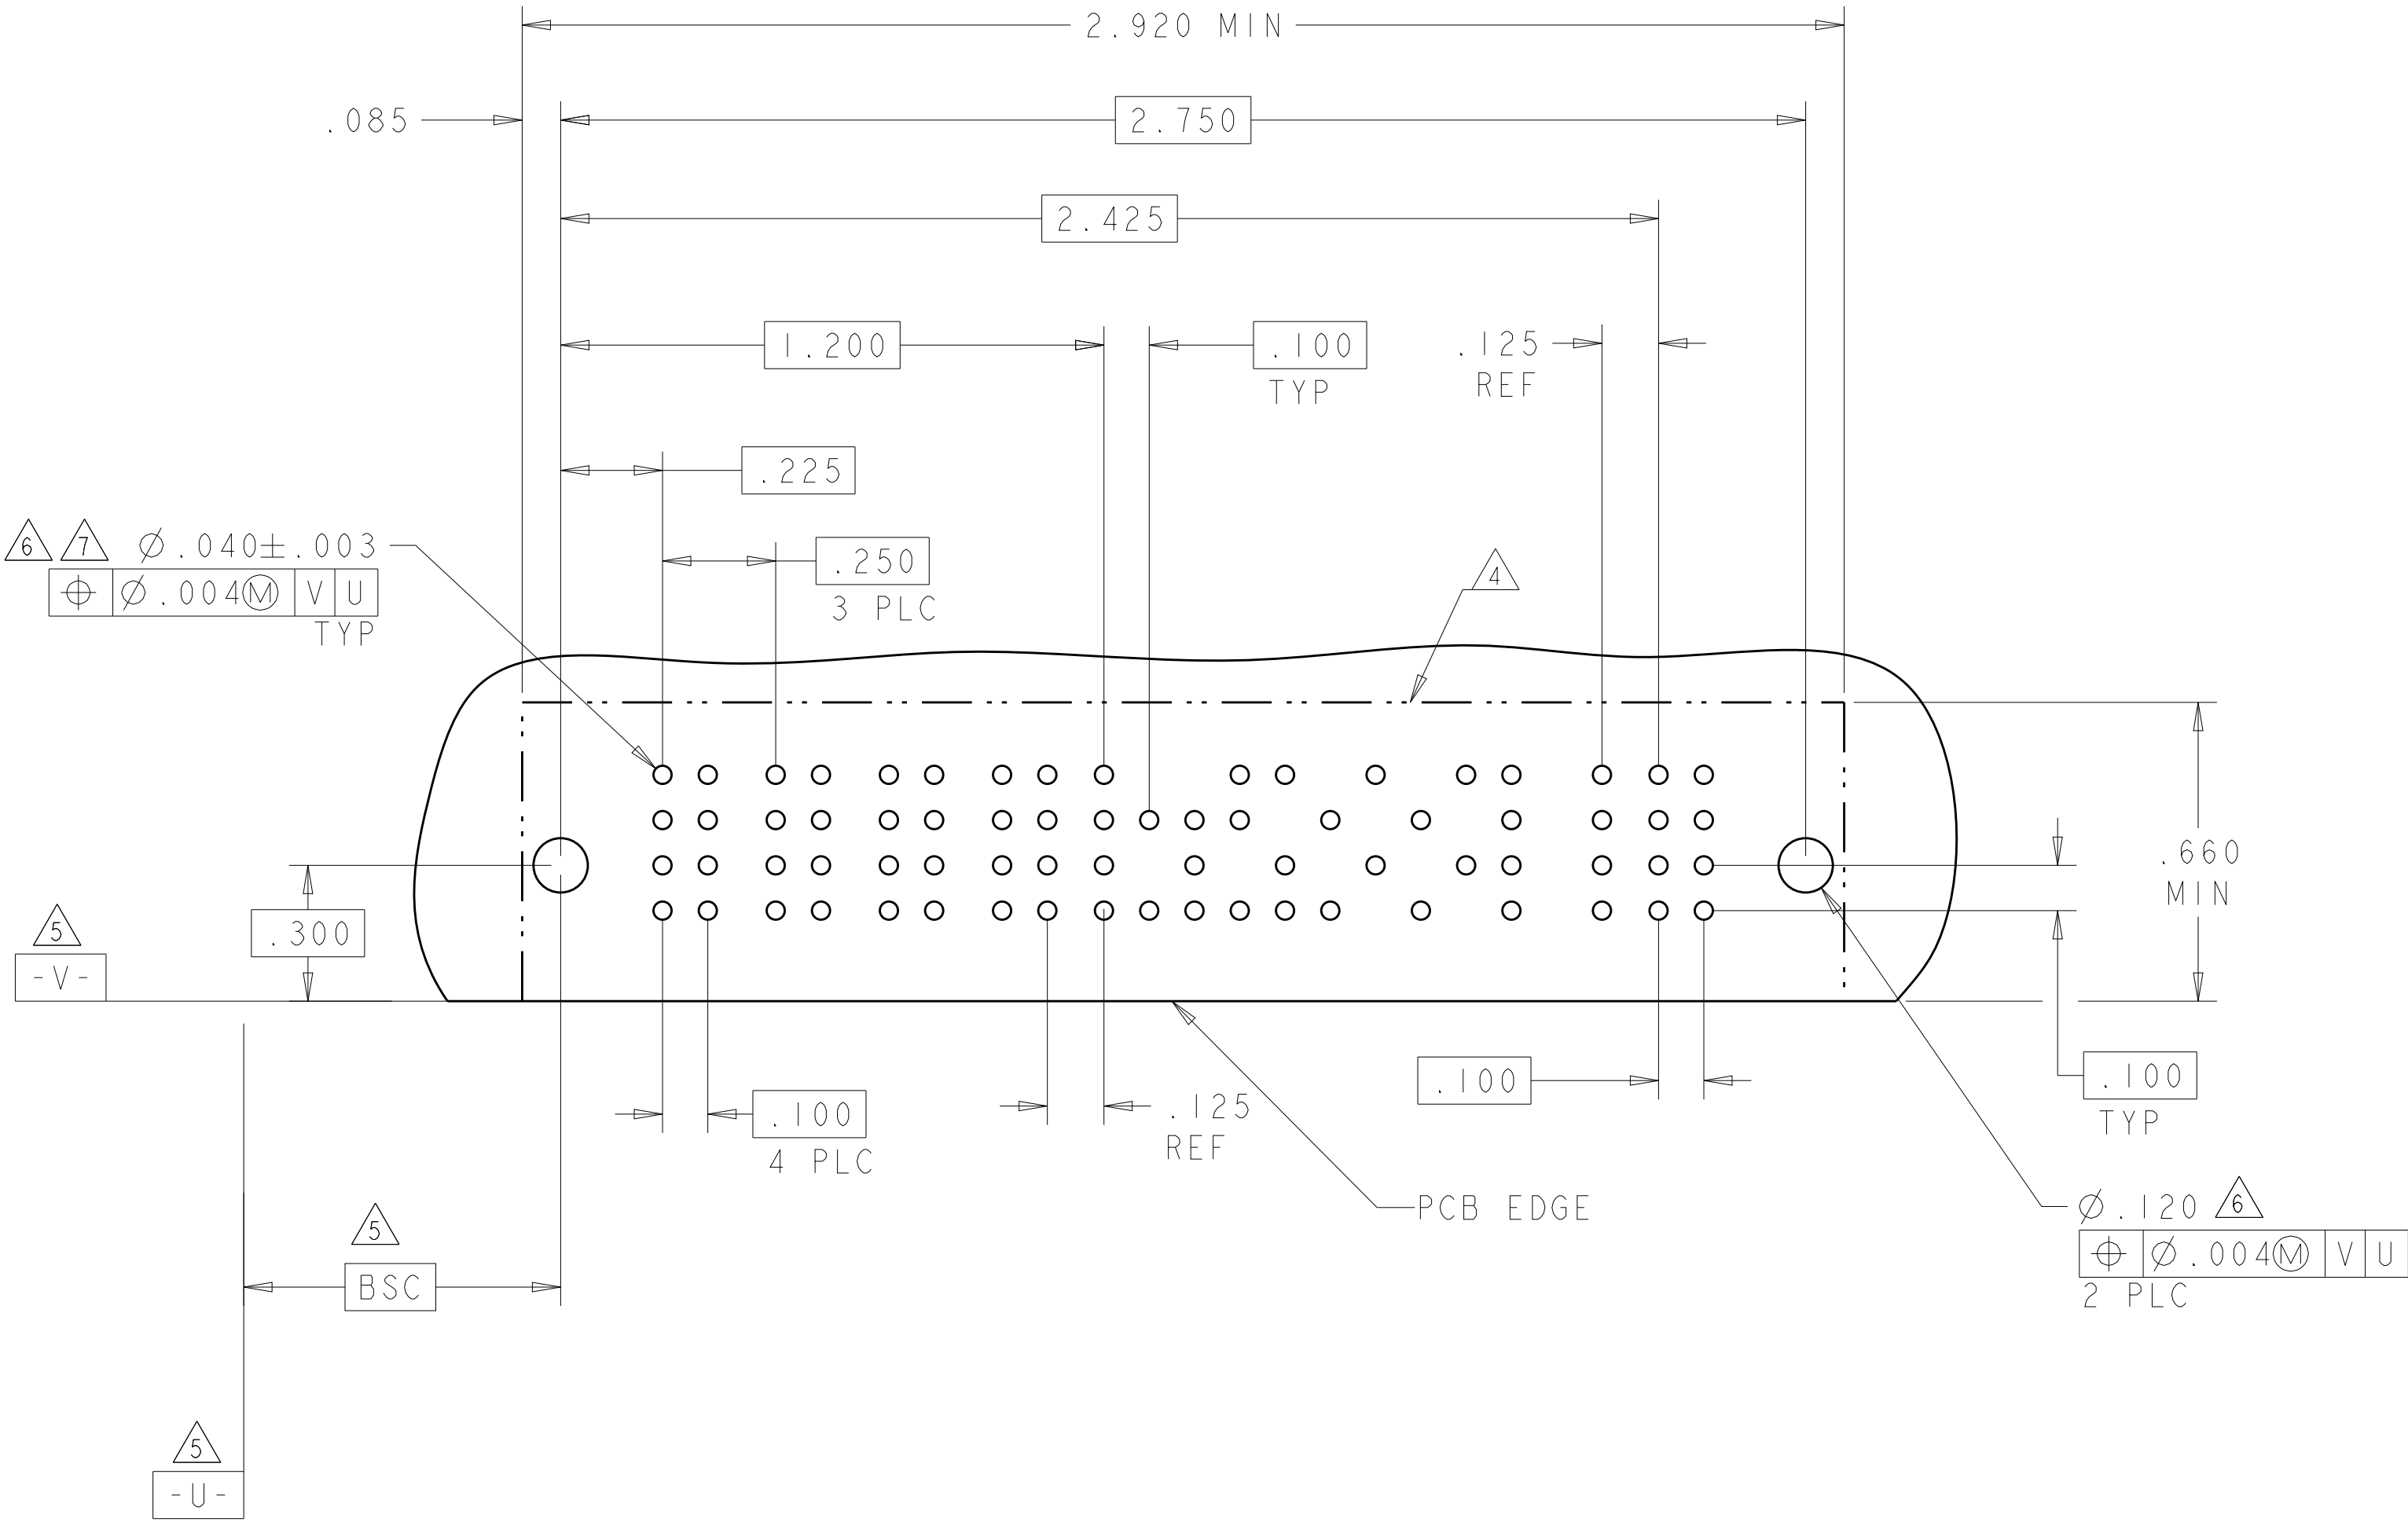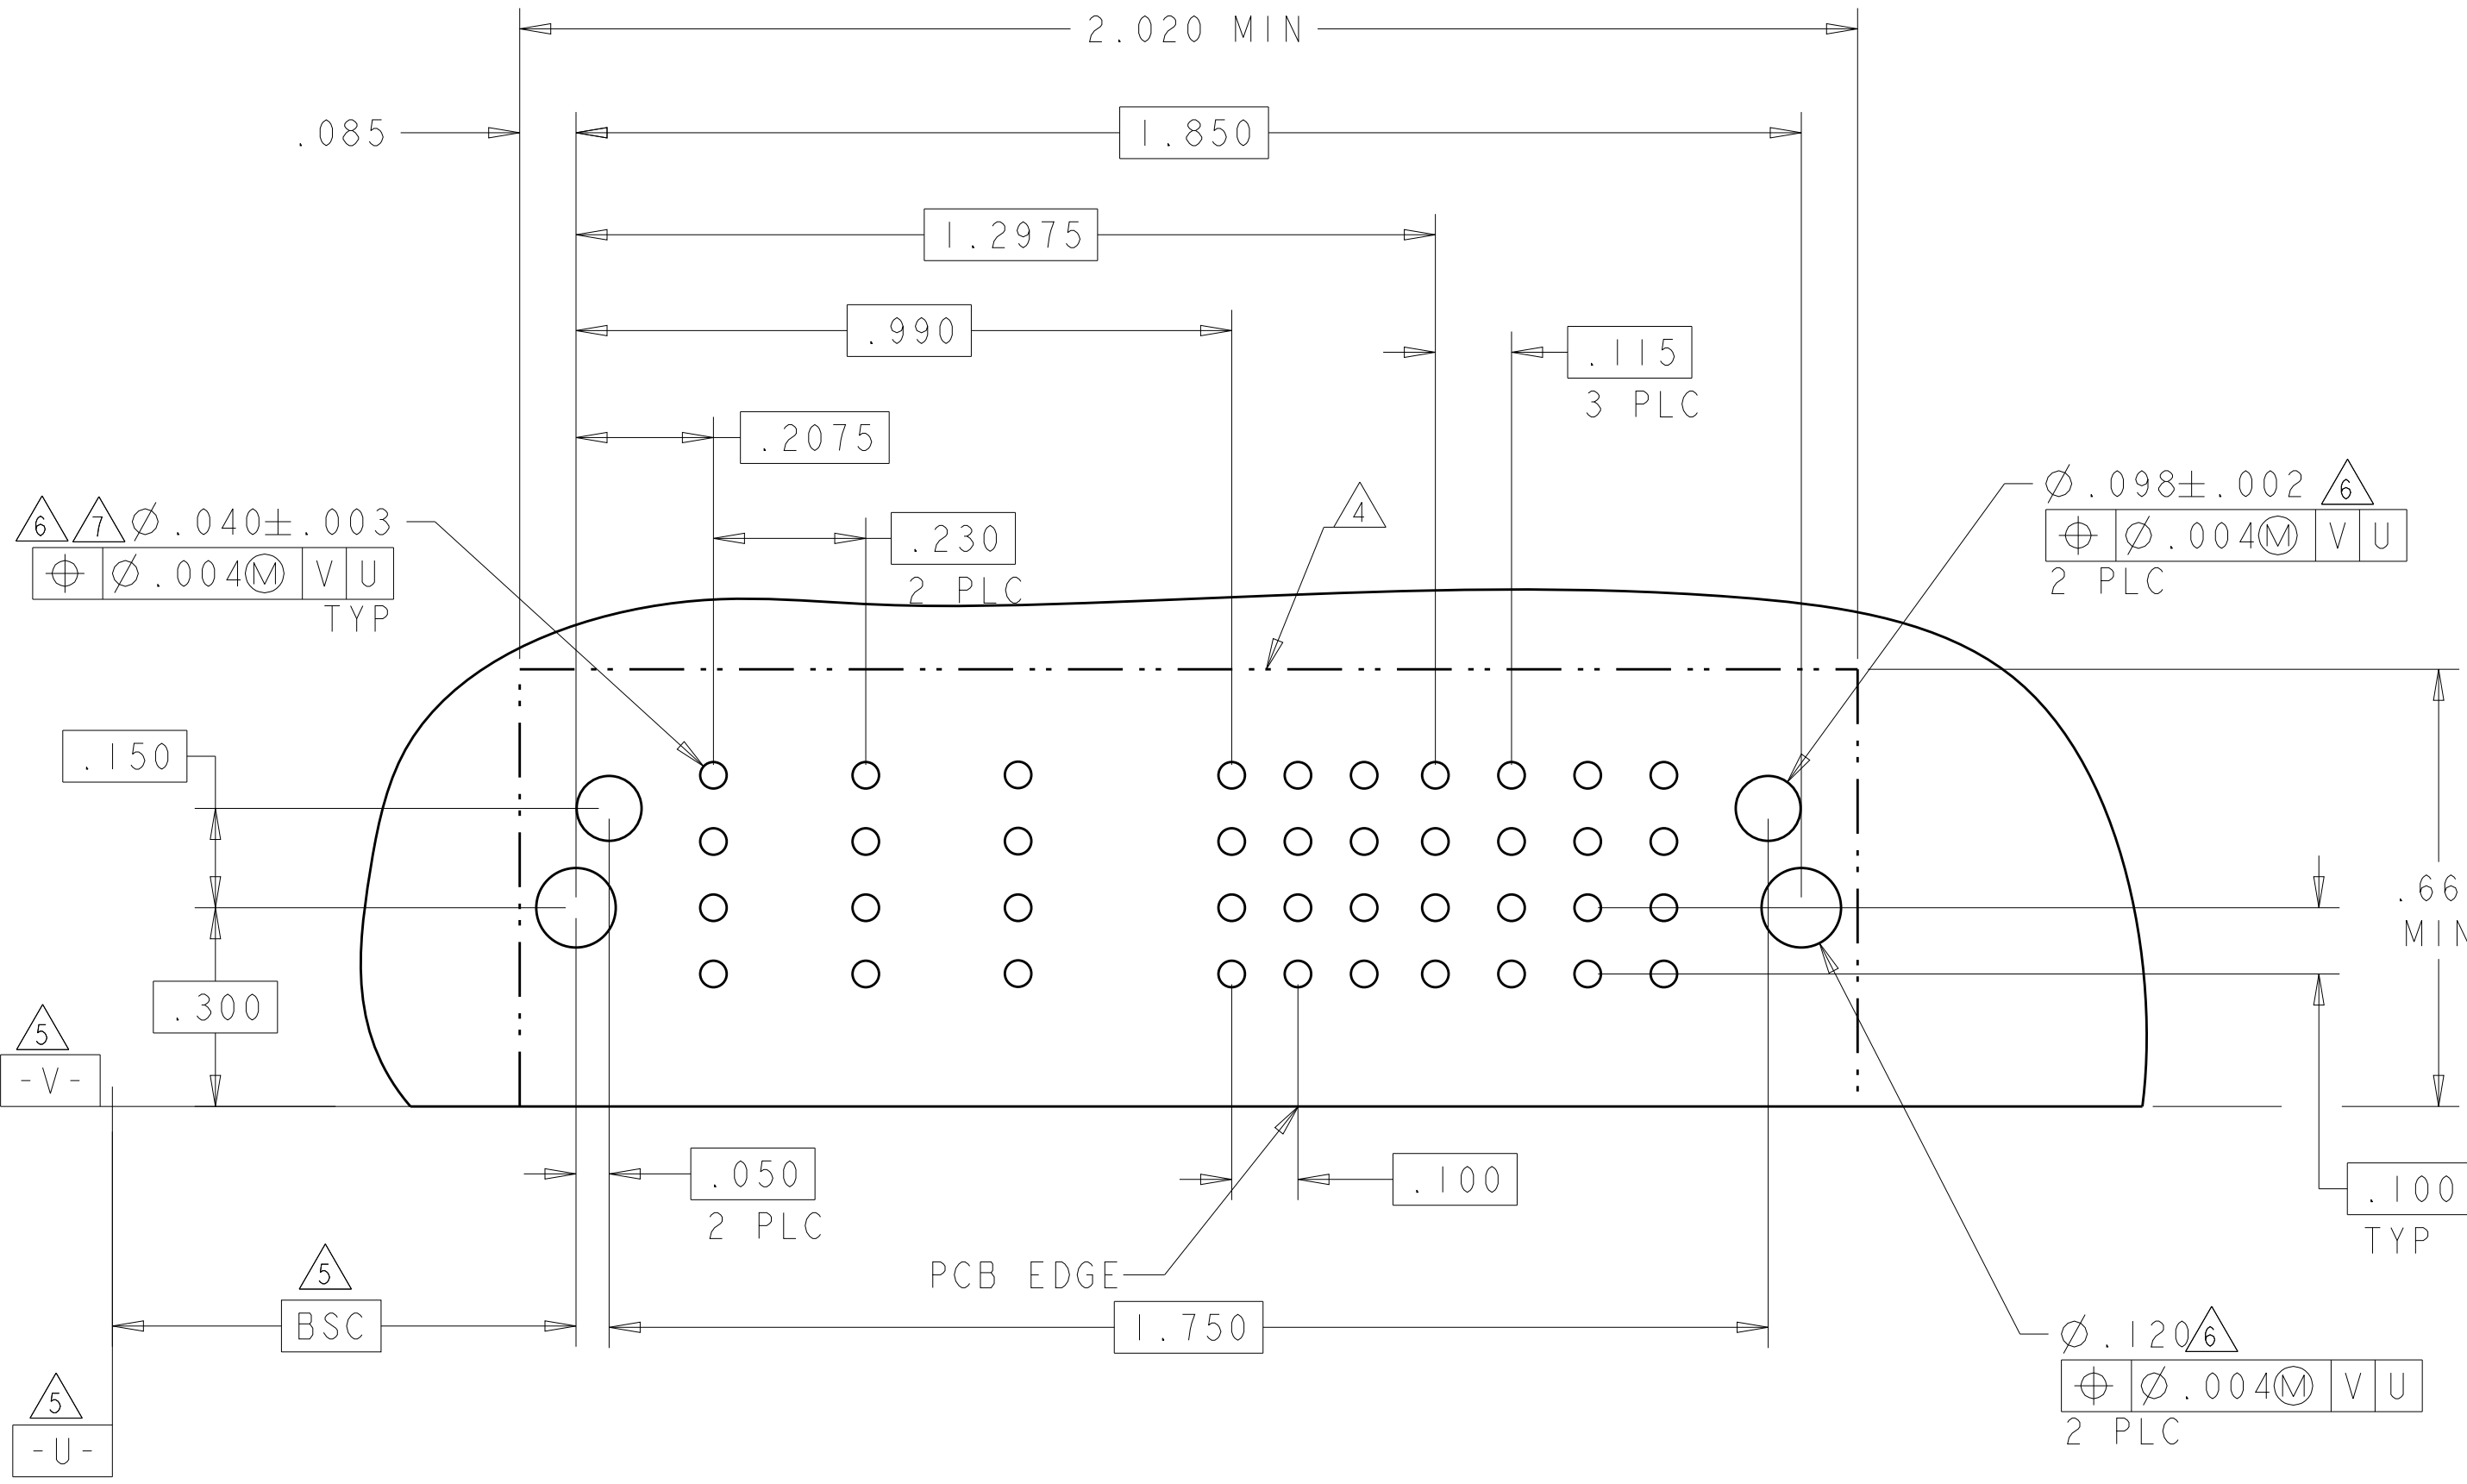

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		LOW POWER												SIGNAL															POWER				
			LP1	LP2	LP3	LP4	LP5	LP6	LP7	LP8	LP9	LP10	LP12	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	P1	P2	P3	P4		
7-6450830-8	D		LM	LM	LM	LM	LM	LM	LM	LM	LM	LM	LM	J	J	J	J	J	J	J	J	J	J	J	J	J	J	TM	TM	TM	TM			
	C													K	K	K	K	K	K	K	K	K	K	K	K	K	K						K	
	B													N	N	N	N	N	N	N	N	N	N	N	N	N	N						N	N
	A													S	S	S	S	S	S	S	S	S	S	S	S	S	S						S	S
12LP + 60S + 4P																																		

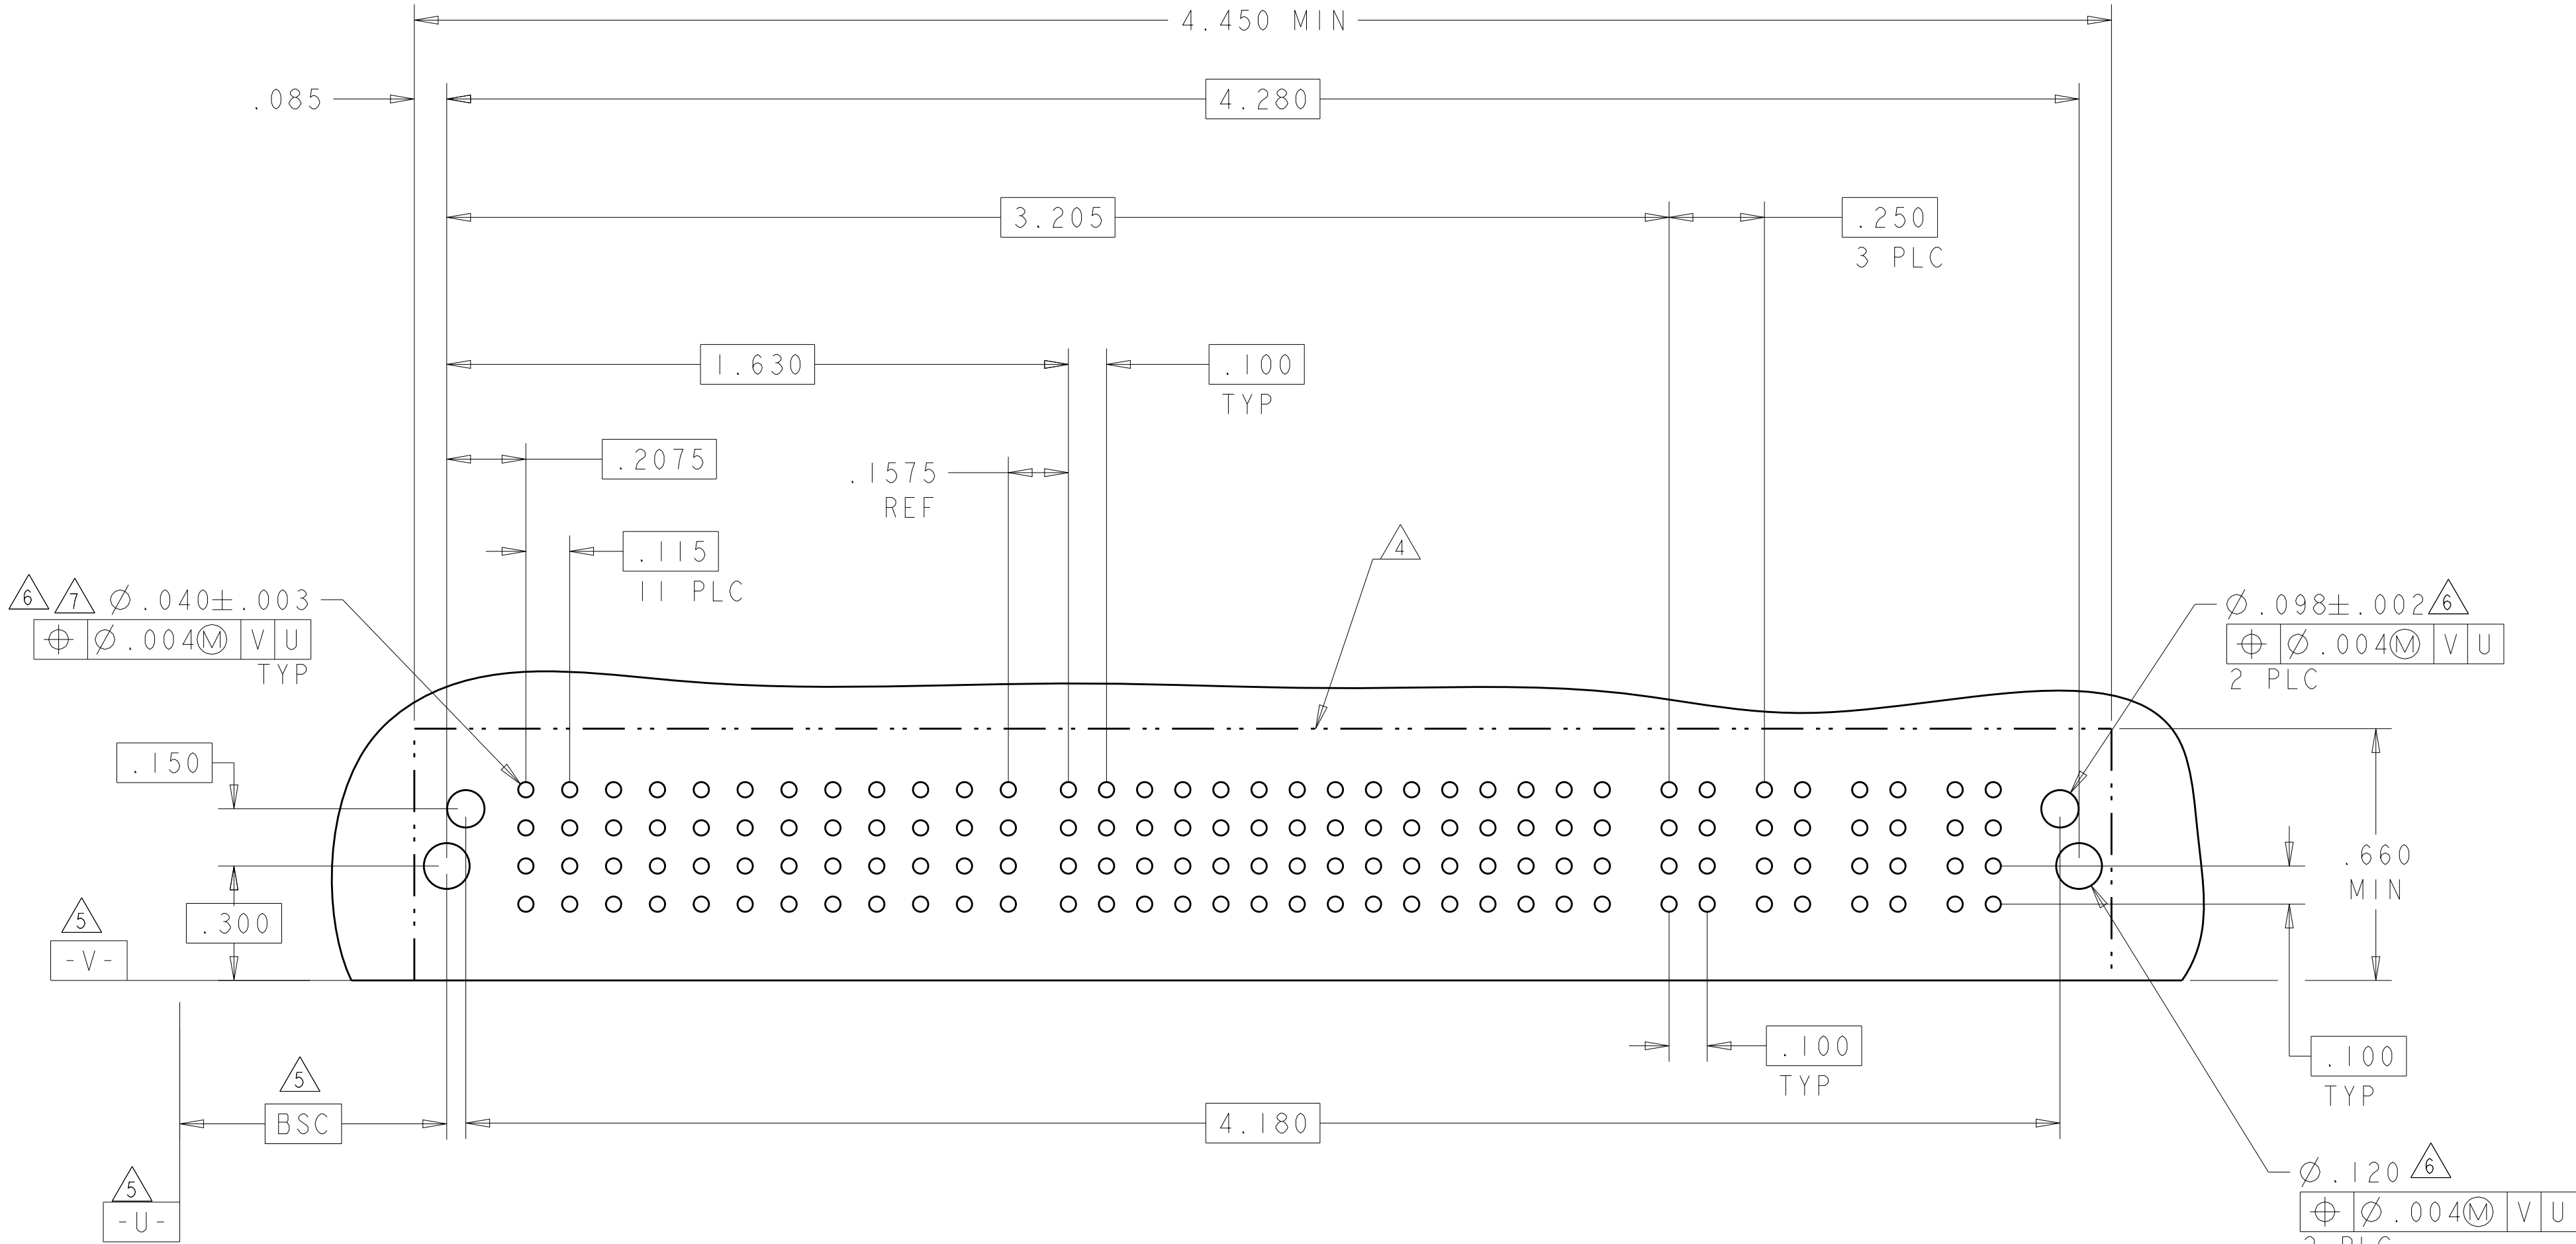

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.ZHAO CHK S.ZHAO APVD S.ZHAO	10APR2007 10APR2007 -
DIMENSIONS: INCHES		PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251	NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT -	RESTRICTED TO -
MATERIAL -		CUSTOMER DRAWING	SCALE 4:1
SHEET 38		OF 42	REV S2

Top view drawing of a PCB assembly. The drawing includes the following dimensions and features:


- Overall Dimensions:**
 - Top: 4.570 MIN
 - Bottom: 4.300
 - Left: .085
 - Right: .660 MIN
- Internal Dimensions and Tolerances:**
 - Top: 4.400, 2.575, 1.950, .225, .250 (6 PLC), .100 TYP
 - Bottom: .050 (2 PLC), .100 (7 PLC), .100 TYP
 - Left: .150, .300
 - Right: .100 TYP
- Features and Callouts:**
 - Top Left:** $\phi .040 \pm .003$ (6), $\phi .004$ (M) (V) (U) TYP
 - Top Right:** $\phi .098 \pm .002$ (6), $\phi .004$ (M) (V) (U) 2 PLC
 - Bottom Left:** $\phi .120$ (6), $\phi .004$ (M) (V) (U) 2 PLC
 - Bottom Center:** PCB EDGE
 - Bottom Right:** BSC, -U-
 - Left Edge:** -V-
 - Right Edge:** .660 MIN

4805 (3/11)

NO CONTACT LOADED


NO CONTACTS LOADED

NO CONTACTS LOADED

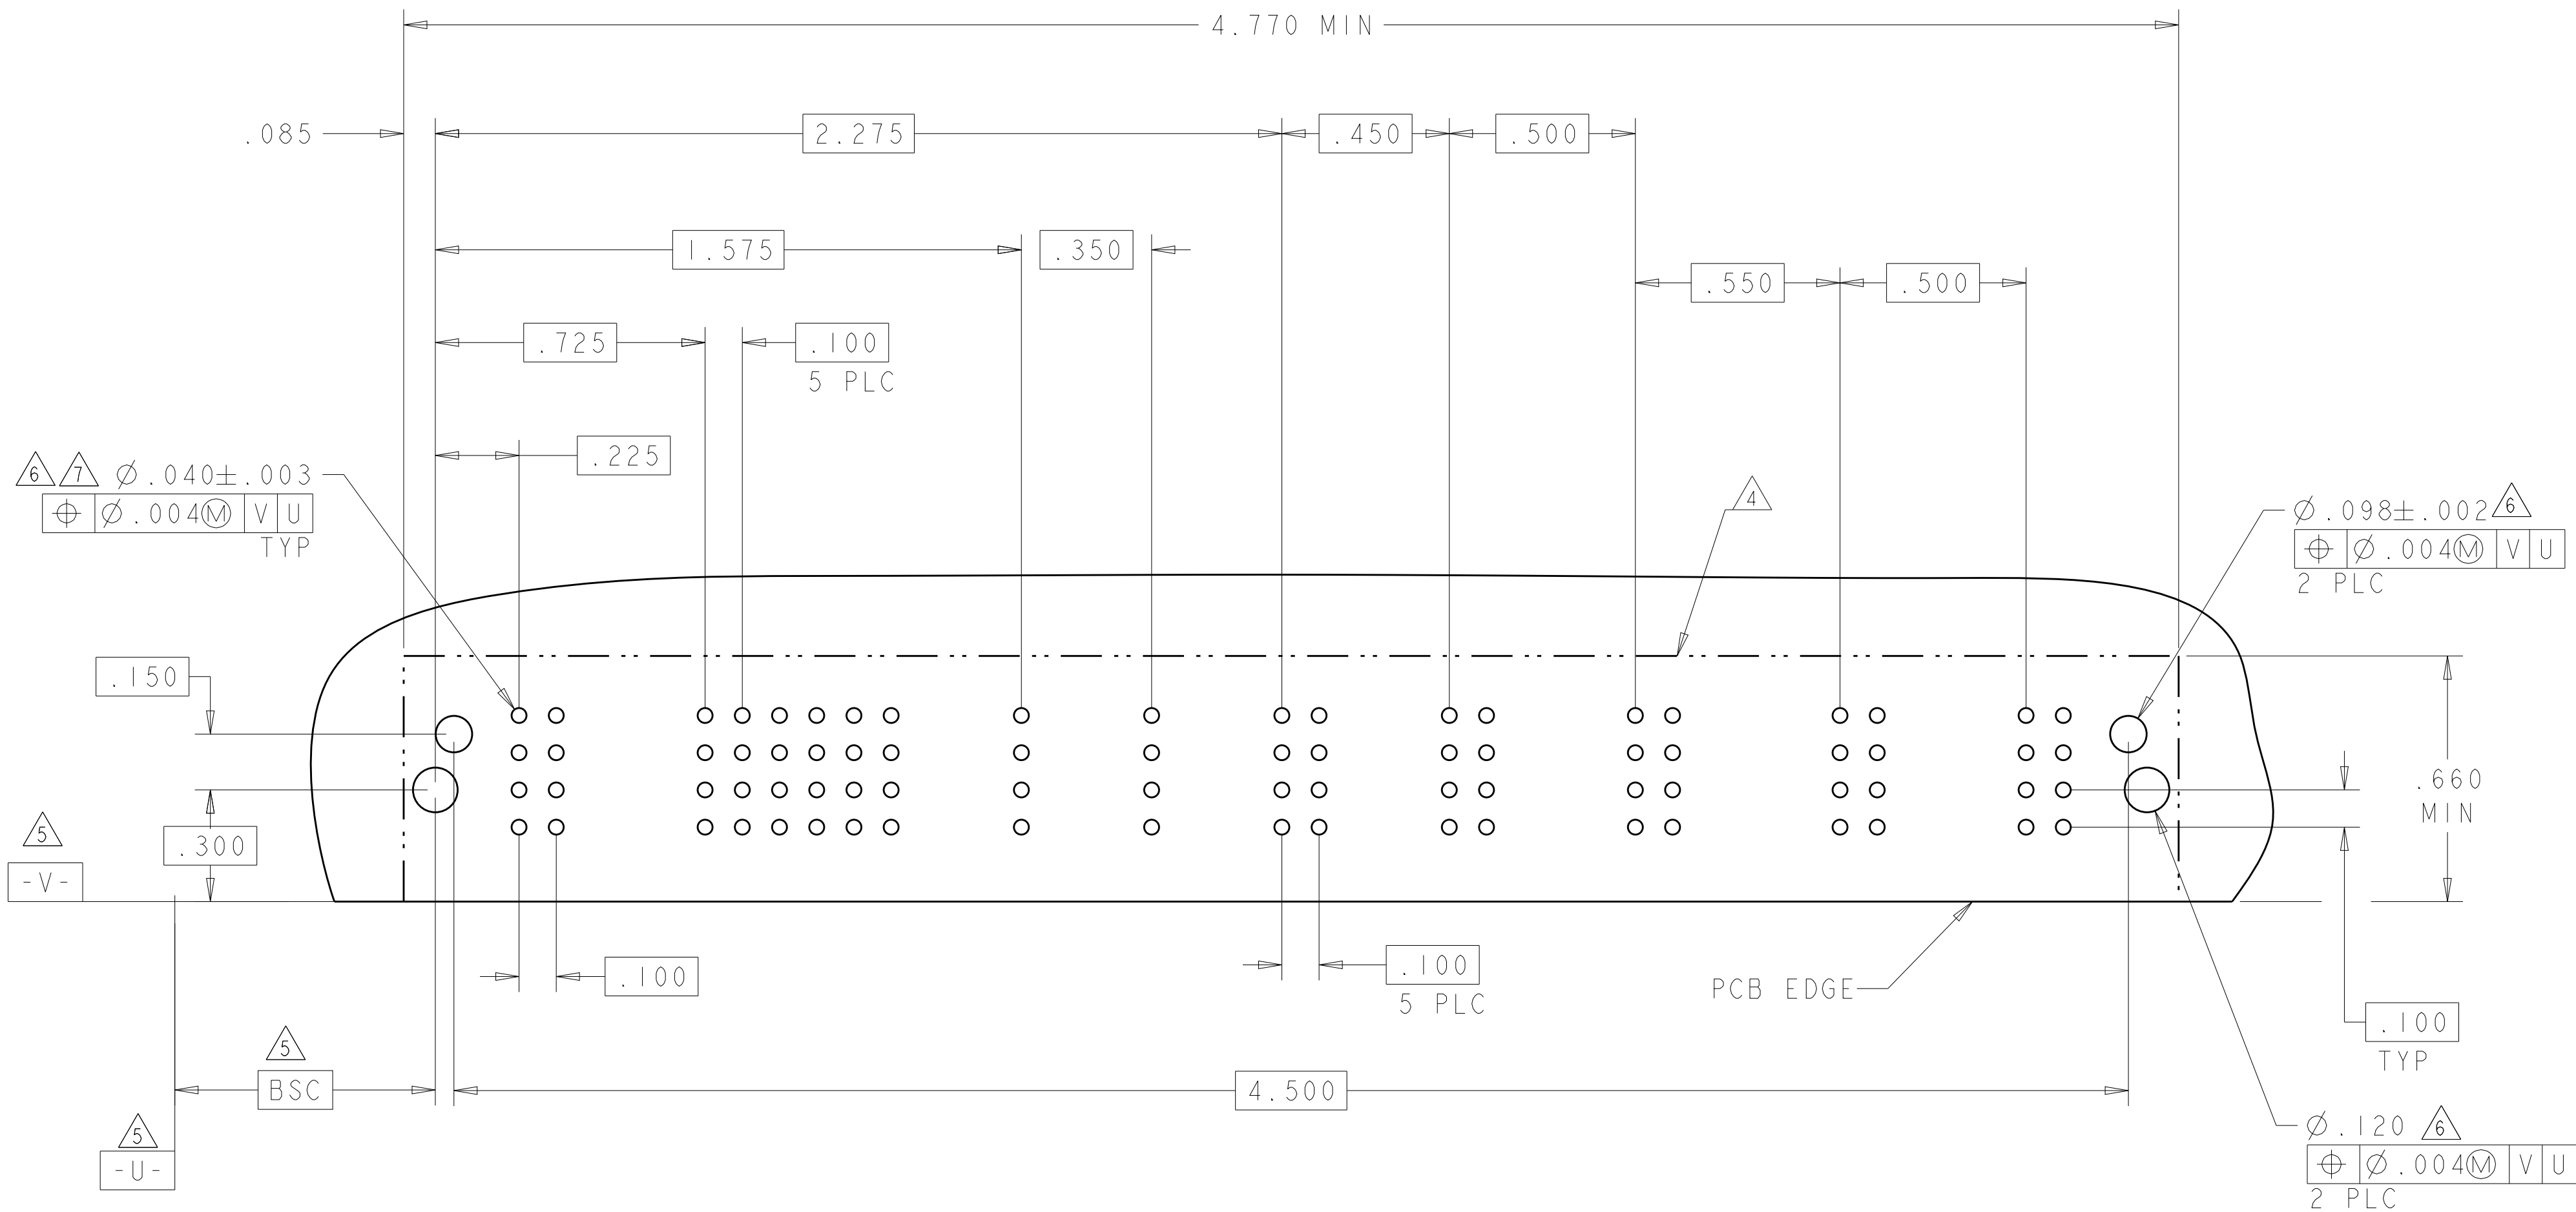4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER			SIGNAL				POWER			
			P1	P2	P3	1	2	3	4	P4	P5	P6	
8-6450830-0	D		TM	TM	TM	J	J	J	J	TM	TM	TM	
	K					K	K	K					
	N					N	N	N					
	S					S	S	S					
3ACP + 16S + 3P													

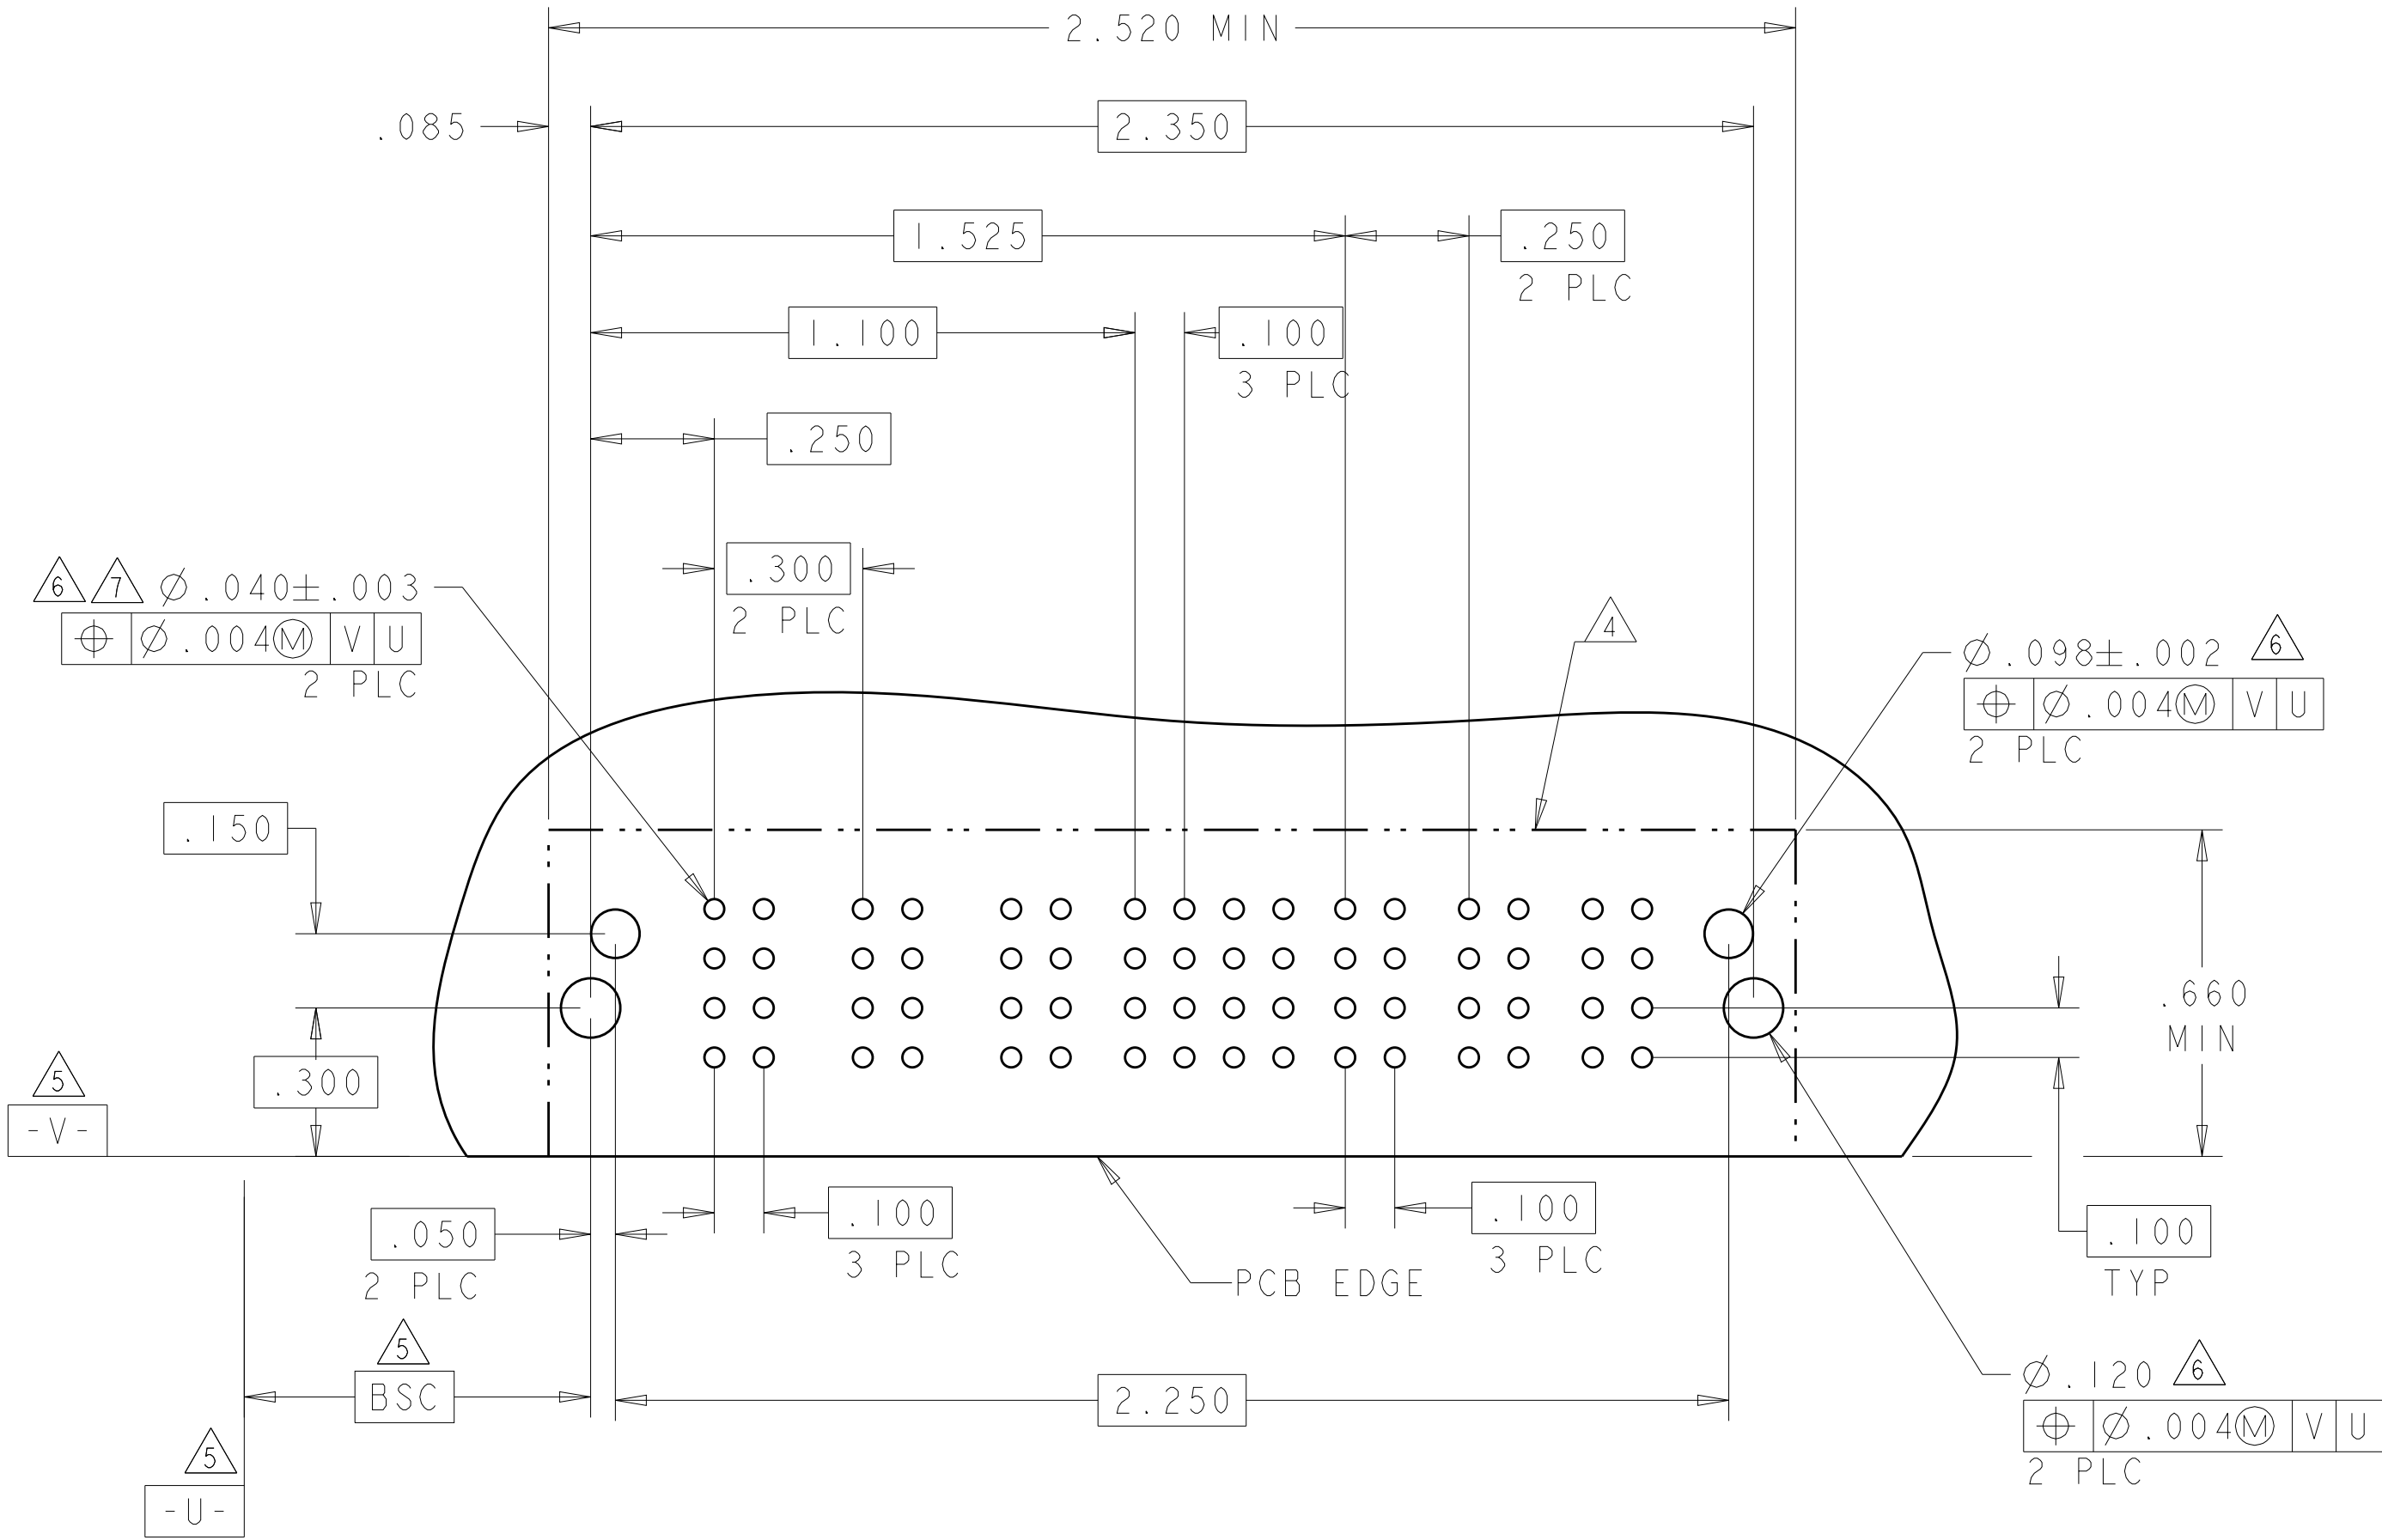

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO	10APR2007	 TE Connectivity				
		CHK S. ZHAO	10APR2007					
DIMENSIONS: INCHES		APVD S. ZHAO	-	NAME	RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE			
		PRODUCT SPEC		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
		108-2292						
		APPLICATION SPEC						
		114-13251						
MATERIAL		WEIGHT		A100779		C=6450830		-
FINISH		CUSTOMER DRAWING		SCALE		4:1		SHEET
								41
								OF
								42
								REV
								S2

- NO CONTACTS LOADED

