

10A Avg.

200 Volts


FRED

TCU10A20

■最大定格 Maximum Ratings

| Item | Symbol | Conditions | | | Unit |
|--|-------------------|---|---|----|------------------|
| くり返しピーク逆電圧 Repetitive Peak Reverse Voltage | V_{RRM} | 200 | | | V |
| 平均整流電流 Average Rectified Forward Current | I_O | 50Hz、正弦全波通電抵抗負荷 50Hz Full Sine Wave Resistive Load | $T_c=116^\circ\text{C}$ | 10 | A |
| 実効順電流 R.M.S. Forward Current | $I_F(\text{RMS})$ | 11.1 | | | A |
| サージ順電流 Surge Forward Current | I_{FSM} | 100 | 50Hz正弦全波、1サイクル、非くり返し 50Hz Full Sine Wave, 1cycle, Non-repetitive | | A |
| 動作接合温度範囲 Operating Junction Temperature Range | T_{jw} | -40~+150 | | | $^\circ\text{C}$ |
| 保存温度範囲 Storage Temperature Range | T_{stg} | -40~+150 | | | $^\circ\text{C}$ |

■OUTLINE DRAWING(mm)

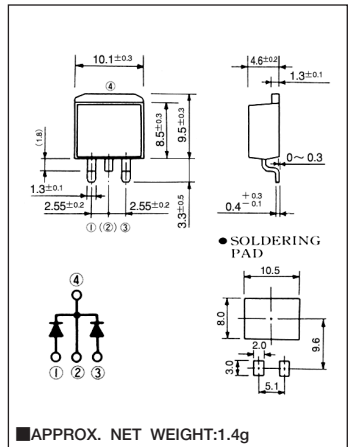

■電氣的・熱的特性 Electrical/Thermal Characteristics

| Item | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------|---------------|---|------|------|------|---------------------------|
| ピーク逆電流 Peak Reverse Current | I_{RM} | $T_j=25^\circ\text{C}$, $V_{RM}=V_{RRM}$, 一素子あたり Per Diode | — | — | 20 | μA |
| ピーク順電圧 Peak Forward Voltage | V_{FM} | $T_j=25^\circ\text{C}$, $I_{FM}=5\text{A}$, 一素子あたり Per Diode | — | 0.91 | 1.10 | V |
| 逆回復時間 Reverse Recovery Time | t_{rr} | $I_{FM}=5\text{A}$, $-di/dt=50\text{A}/\mu\text{s}$, $T_j=25^\circ\text{C}$ | — | 18 | 27 | ns |
| 熱抵抗 Thermal Resistance | $R_{th(j-c)}$ | 接合部・ケース間 Junction to Case | — | — | 3 | $^\circ\text{C}/\text{W}$ |

■定格・特性曲線

