
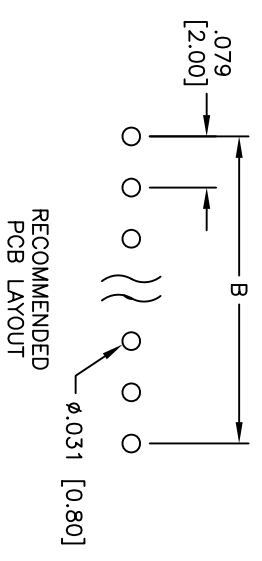
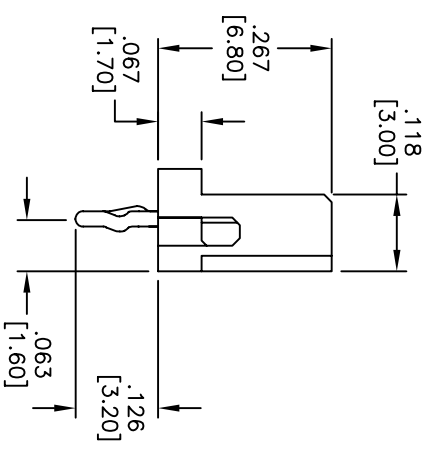
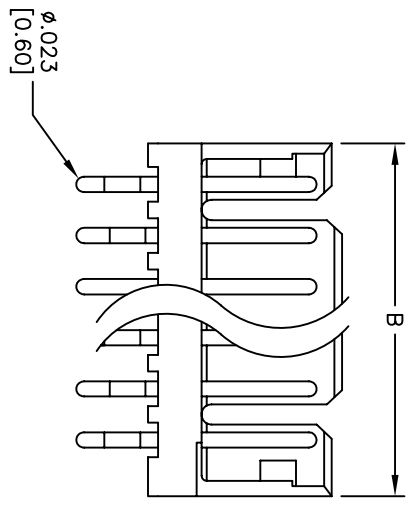


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/17/08	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

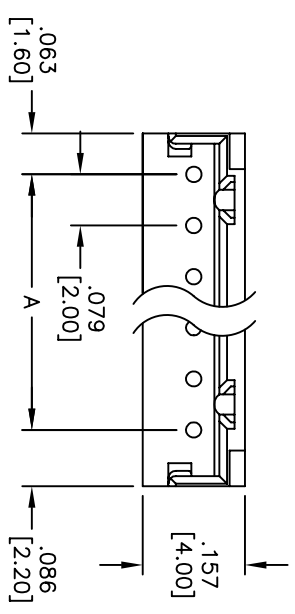

**SPECIFICATIONS:**  
 Material: Nylon 66, rated UL 94V-0  
 Insulator color: Natural  
 Contacts: Brass  
 Plating: Tin over Copper underplate overall

**Electrical:**  
 Operating voltage: 100 VAC max  
 Current rating: 2 Amps max  
 Contact resistance: 10 mohms max  
 Insulation resistance: 1,000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
**Temperature Rating:**  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant  
 Recommended soldering temp: 235°C for 5 seconds



Positions: 2 thru 15  
 A = .079 [2.00] x No. of Positions - 1  
 B = .079 [2.00] x No. of Positions + .079 [2.00]

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS	[MM]
.X ± .10	ØXX	±.10
.XX ± .020	ØXXX	±.015
.XXX ± .015	ØXXXX	±.010

APPROVALS

DATE	DATE

DRAWN	SS	3/17/08
CHECKED		
APPROVED		

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] SHRROUDED HEADER  
 RIGHT ANGLE, PCB

SIZE	PART NO.	SCALE	SHEET	REV.
X	2SH-D-XX-TS	NTS	1 OF 1	

6 5 4 3 2 1