

ISSUE 1; May 2016

Description

- Not recommended for new designs, please see model CXOMK 3.3V
Intended for applications requiring shock survivability to 10,000G (and higher), the surface-mount CXO3MHG oscillator is a high-shock version of the CXO3M oscillator. These oscillators consist of a miniature quartz crystal and a hybrid circuit in a low-profile ceramic package with an extremely small footprint.
- SM1 SM1 (Gold Plated, RoHS compliant)
- SM5 SM5 (Solder Dipped, RoHS compliant)
- Please note that all data is only valid at 25°C unless otherwise stated.

Frequency Parameters

- Frequency 200.0kHz to 220.0MHz
- Frequency Tolerance $\pm 100.00\text{ppm}$ to $\pm 10,000.00\text{ppm}$
- Tolerance Condition @ 25°C
- Frequency Stability $\pm 50.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Ageing $\pm 10\text{ppm}$ max in 1st year

Electrical Parameters

- Supply Voltage 3.3V $\pm 10\%$
- Supply Voltage (absolute maximum rating): -0.5V to 7.0V

Operating Temperature Ranges

- 10 to 70°C
- 40 to 85°C
- 55 to 125°C

Output Details

- Output Compatibility CMOS
- Drive Capability 15pF


Output Control

- Start Up Tme: 5ms max
- Enable/Disable (EN):
Logic 1 to pad 1, output enabled
Logic 0 to pad 1, output disabled, output goes to high impedance state, current consumption very low. Internal oscillator stops.
Output recovery is delayed.
- No Connection (NC): Pad 1 No Connection
- Tri State (TS):
Logic 1 to pad 1, output enabled
Logic 0 to pad 1, output disabled, output goes to high impedance state, current consumption low. Internal oscillator continues to function.
Output recovery is immediate.

Environmental Parameters

- Shock: 10000G, 0.3ms, 1/2 sine
- Vibration: MIL-STD-202G, Method 204D, Condition D: 20G, 10Hz-2000Hz swept sine
- Storage Temperature Range: -55 to 125°C

Outline (mm) -SM1 = SM1 (Gold Plated, RoHS compliant)

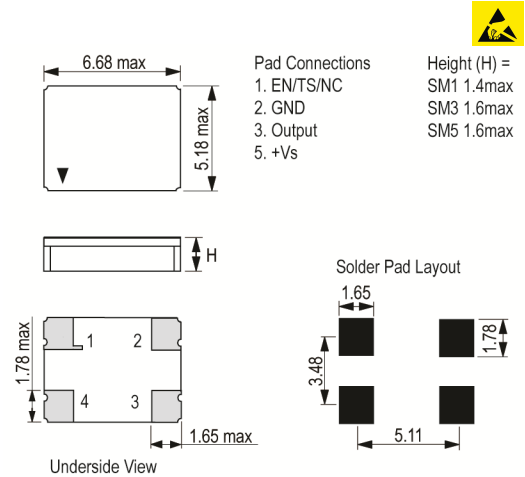

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Manufacturing Details

- Features:
 - High shock resistance
 - Designed for surface mount applications using infrared, vapour phase or epoxy mount techniques
 - CMOS and TTL compatible
 - Low power consumption
 - Optional Output Enable/Disable with Tri-State
 - Low EMI emission
 - Full military testing available
- Applications:
 - Military & Aerospace -
 - Smart munitions
 - Projectile electronics
 - Industrial -
 - Engine control
 - Down-hole drilling
- Maximum Process Temperature: 260°C, 20 seconds

Ordering Information

- Frequency*
 - Model*
 - Termination Variant*
 - Output
 - Frequency Tolerance (@ 25°C)*
 - Frequency Stability*
 - Operating Temperature Range*
 - Pad 1 Function*
 - (*minimum required)
- Termination Variants:
 - SM1 = Gold Plated / SM5 = Solder Dipped
 - (Note: Non-RoHS compliant terminations also available - SM3 = Solder Dipped)
- Example
 - 10.0MHz CXO3MHG SM1
 - CMOS ±100ppm ±100ppm -40 to 85 TS

Compliance

- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Tray Tray
Pack Size: 1
- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 1,000

Electrical Specification - maximum limiting values 3.3V ±10%

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
200.0kHz	220.0MHz	-10 to 70	±50.0	-	6	40/60%
		-40 to 85	±100.0	-	6	40/60%
		-55 to 125	±100.0	-	6	40/60%

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com