


**P-Channel Enhancement Mode MOSFET**

**Feature**

- -20V/-3A,  $R_{DS(ON)} = 120m\Omega(MAX) @V_{GS} = -4.5V$ .  
 $R_{DS(ON)} = 150m\Omega(MAX) @V_{GS} = -2.5V$ .
- Super High dense cell design for extremely low  $R_{DS(ON)}$
- Reliable and Rugged
- SOT-23 for Surface Mount Package



**Applications**

- Power Management  
Portable Equipment and Battery Powered Systems.

**Absolute Maximum Ratings**  $T_A=25^{\circ}C$  Unless Otherwise noted

Parameter	Symbol	Limit	Units
Drain-Source Voltage	$V_{DS}$	-20	V
Gate-Source Voltage	$V_{GS}$	$\pm 10$	V
Drain Current-Continuous	$I_D$	-3	A

**Electrical Characteristics**  $T_A=25^{\circ}C$  Unless Otherwise noted

Parameter	Symbol	Test Conditions	Min	Typ.	Max	Units
<b>Off Characteristics</b>						
Drain to Source Breakdown Voltage	BVDSS	$V_{GS}=0V, I_D=-250\mu A$	-20	-	-	V
Zero-Gate Voltage Drain Current	IDSS	$V_{DS}=-20V, V_{GS}=0V$	-	-	-1	$\mu A$
Gate Body Leakage Current, Forward	IGSSF	$V_{GS}=10V, V_{DS}=0V$	-	-	100	nA
Gate Body Leakage Current, Reverse	IGSSR	$V_{GS}=-10V, V_{DS}=0V$	-	-	-100	nA
<b>On Characteristics</b>						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{GS}=V_{DS}, I_D=-250\mu A$	-0.4	-	-1.0	V
Static Drain-source On-Resistance	RDS(ON)	$V_{GS}=-4.5V, I_D=-3.0A$	-	--	120	$m\Omega$
		$V_{GS}=-2.5V, I_D=-2.0A$	-	--	150	$m\Omega$
<b>Drain-Source Diode Characteristics and Maximum Ratings</b>						
Drain-Source Diode Forward Voltage	VSD	$V_{GS}=0V, I_S=-1.25A$			-1.2	V

### Typical Characteristics

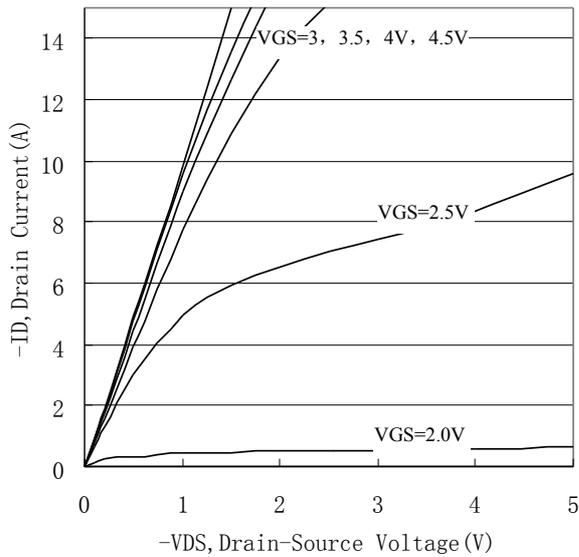


Figure 1. Output Characteristics

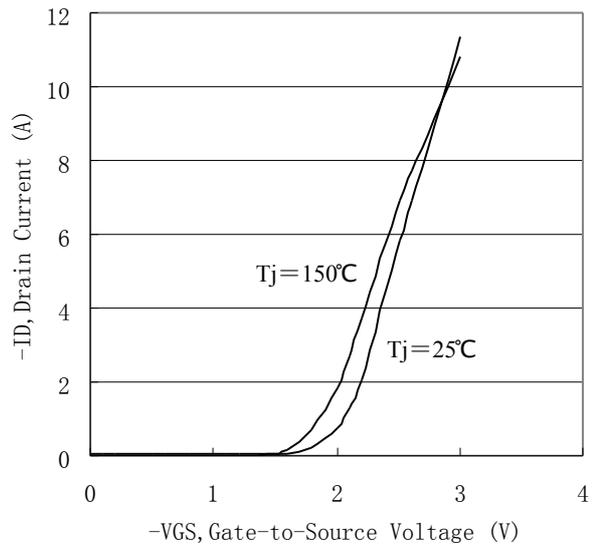


Figure 2. Transfer Characteristics

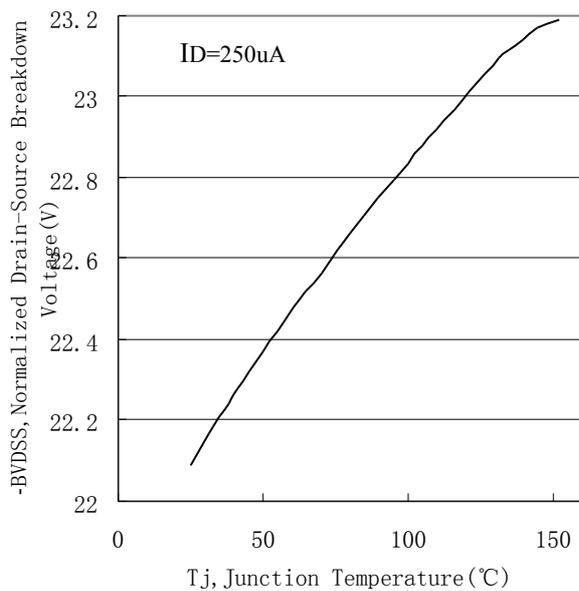


Figure 3. Breakdown Voltage Variation with Temperature



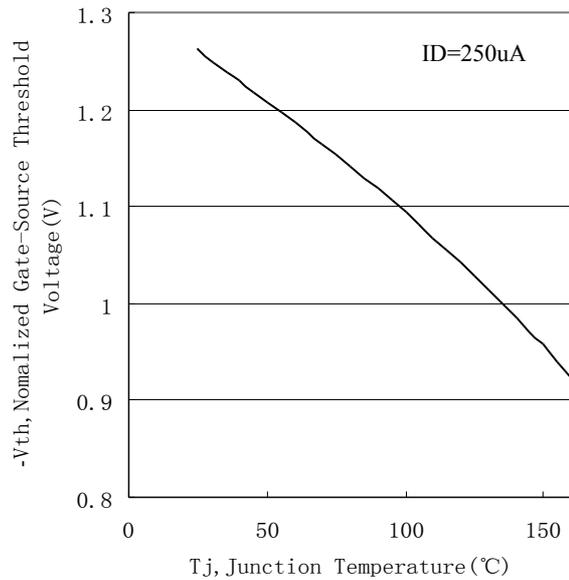


Figure 4. Gate Threshold Variation with Temperature


### Typical Characteristics

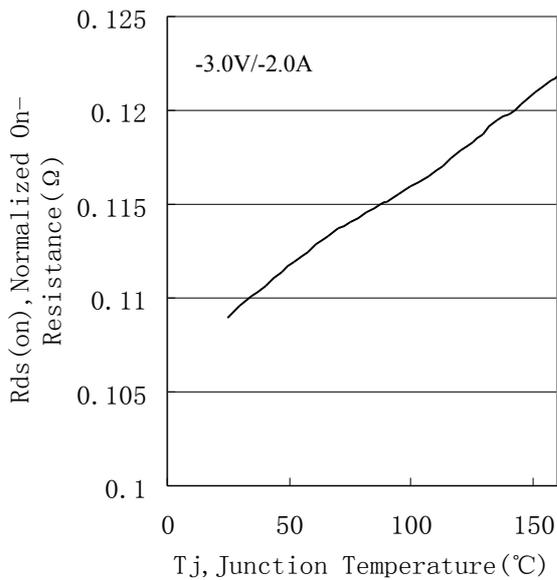


**Figure 5. On-Resistance Variation with Temperature**

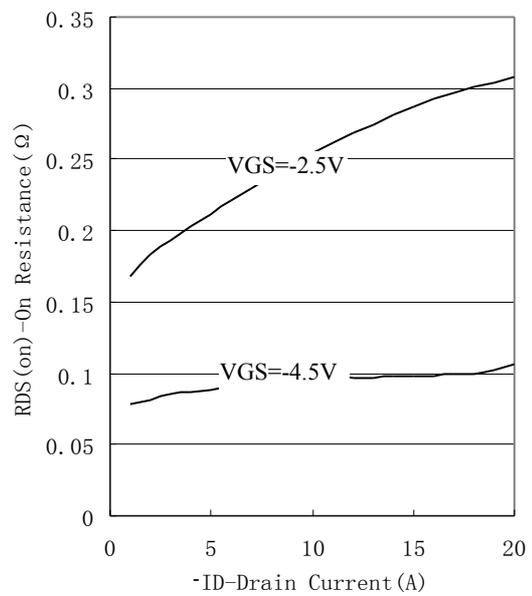

**Figure 6. On-Resistance vs. Drain Current**

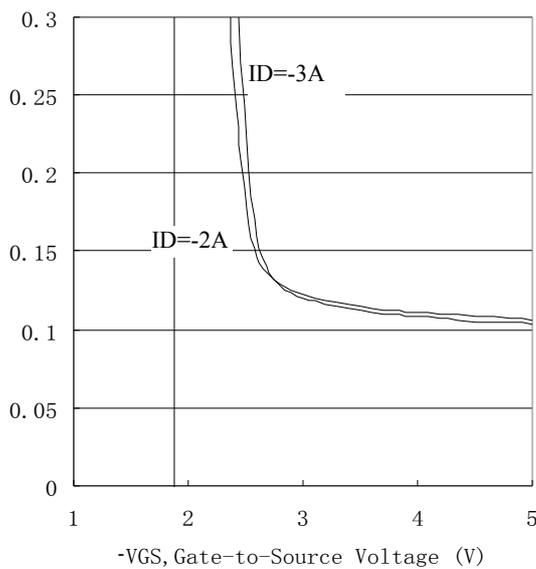


**Figure 7. On-Resistance vs. Gate-to-Source Voltage**

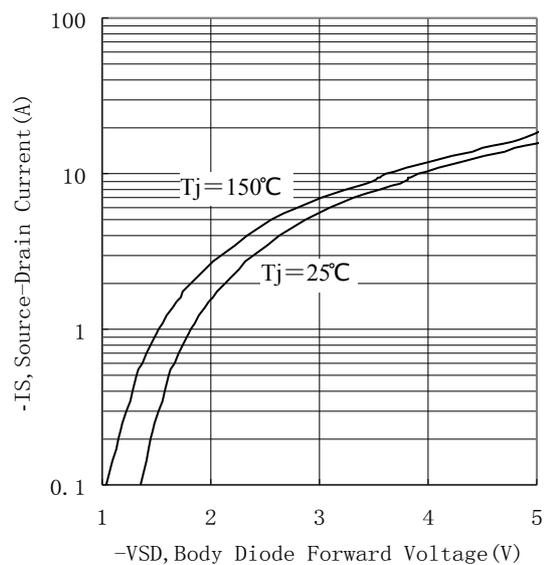



**Figure 8. Source-Drain Diode Forward**

**Package Outline Dimensions (UNIT: mm)**

**SOT-23**

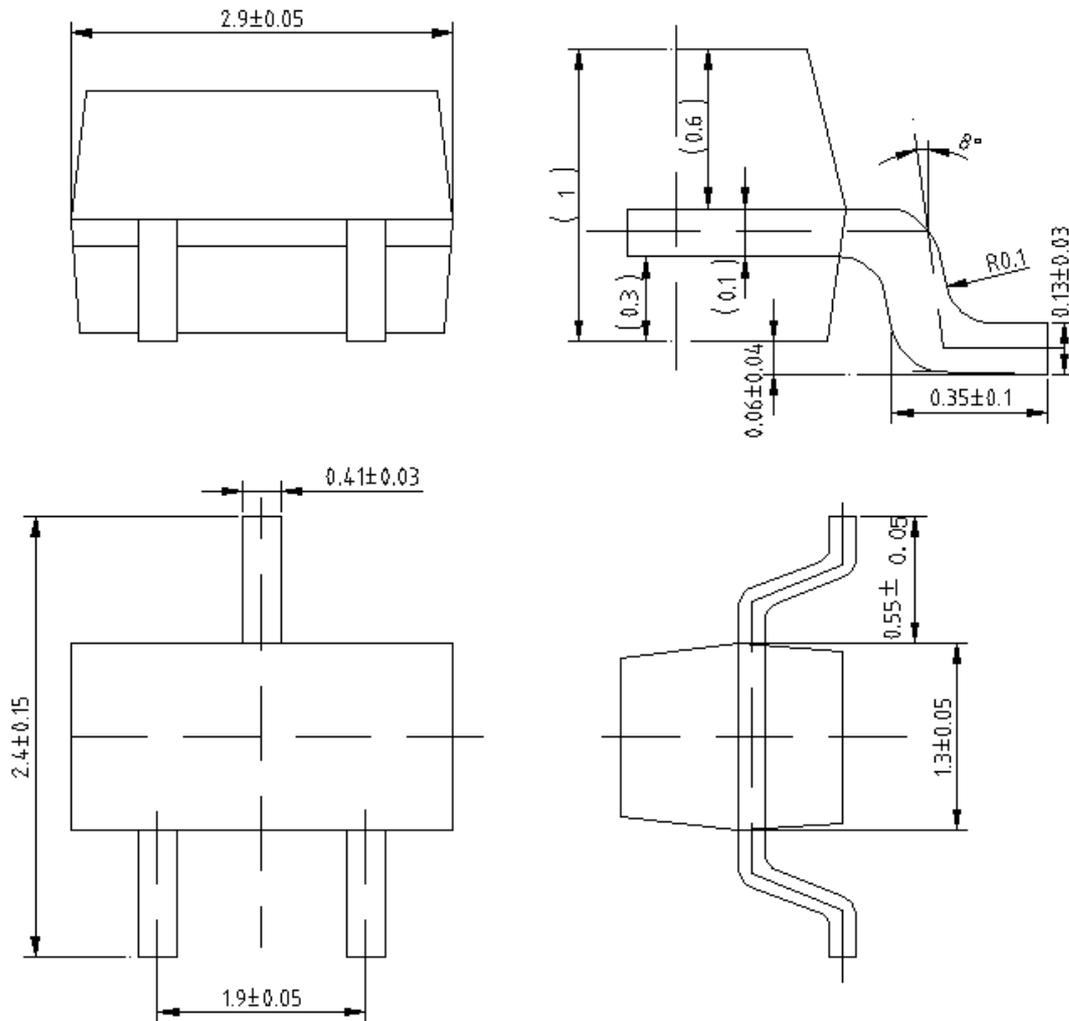

SOT-23 Carrier Tape

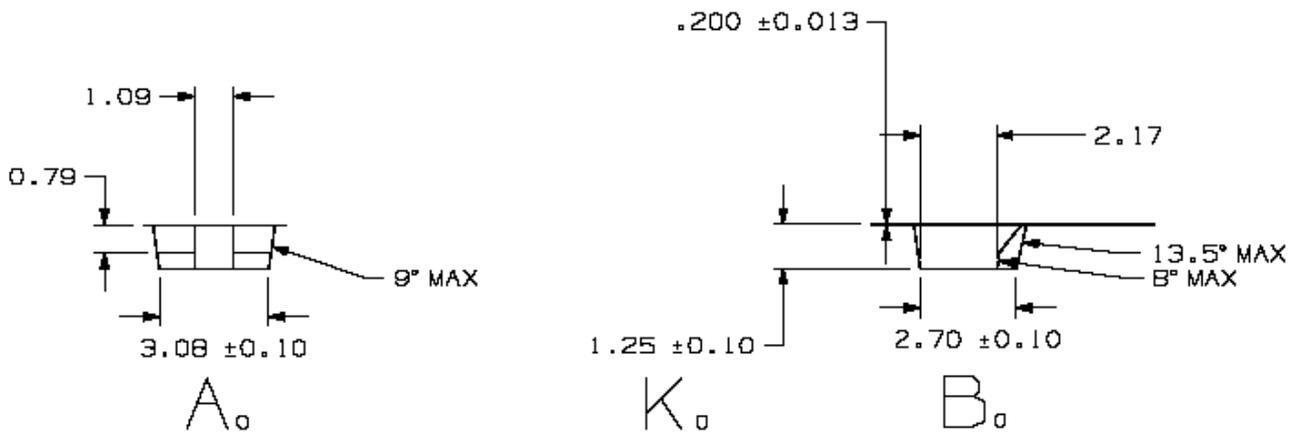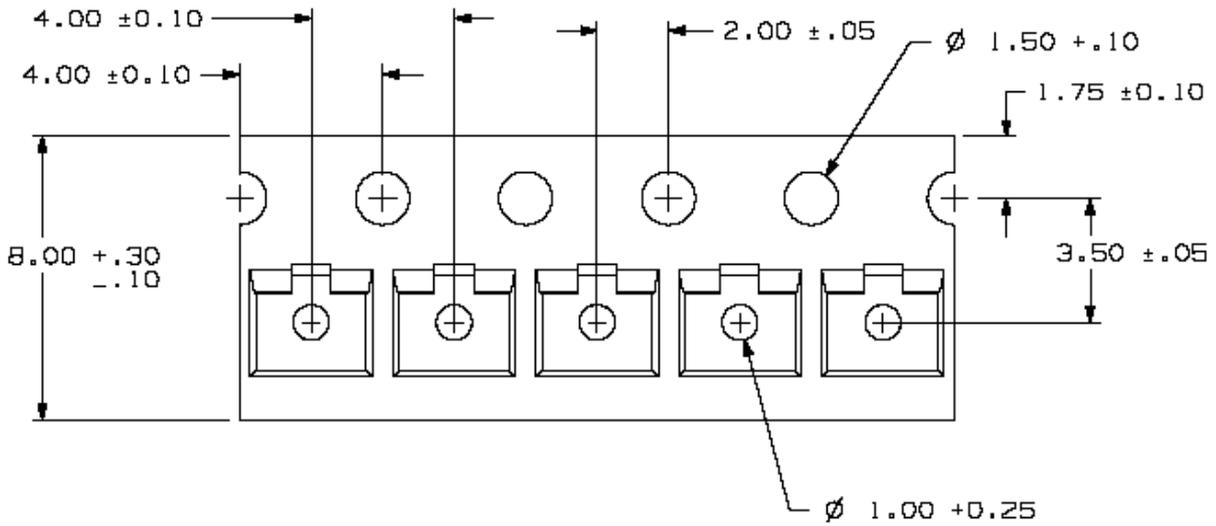

SOT-23 Carrier Reel

