



Micro Commercial Components



Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

SMF5.0(C)A
THRU
SMF170(C)A

200WATTS TRANSIENT
VOLTAGE SUPPRESSOR
5.0 TO 170 VOLTS

Features

- Halogen free available upon request by adding suffix "-HF"
Stand-off Voltage 5-170 Volts
Uni and bi-directional type available (suffix"C"means bi-directional)
Surface Mount
Low Clamping Voltage
200 Watt Peak Power Dissipation
Small, High Thermal Efficiency
Marking Code: See Electrical Characteristics Table
Epoxy meets UL 94 V-0 flammability rating
Moisture Sensitivity Level 1
Lead Free Finish/RoHS Compliant (NOTE 1)("P" Suffix designates RoHS Compliant. See ordering information)

Maximum Ratings

- Operating Temperature: -65°C to +175°C
Storage Temperature: -65°C to +175°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

Table with 3 columns: Parameter, Symbol, Value. Rows include Peak Pulse Power (10/1000us Waveform) with P_PP and 200W, and ESD Voltage(HBM) with V_ESD and >16KV.

Note: 1. High Temperature Solder Exemption Applied, see EU Directive Annex Notes 7


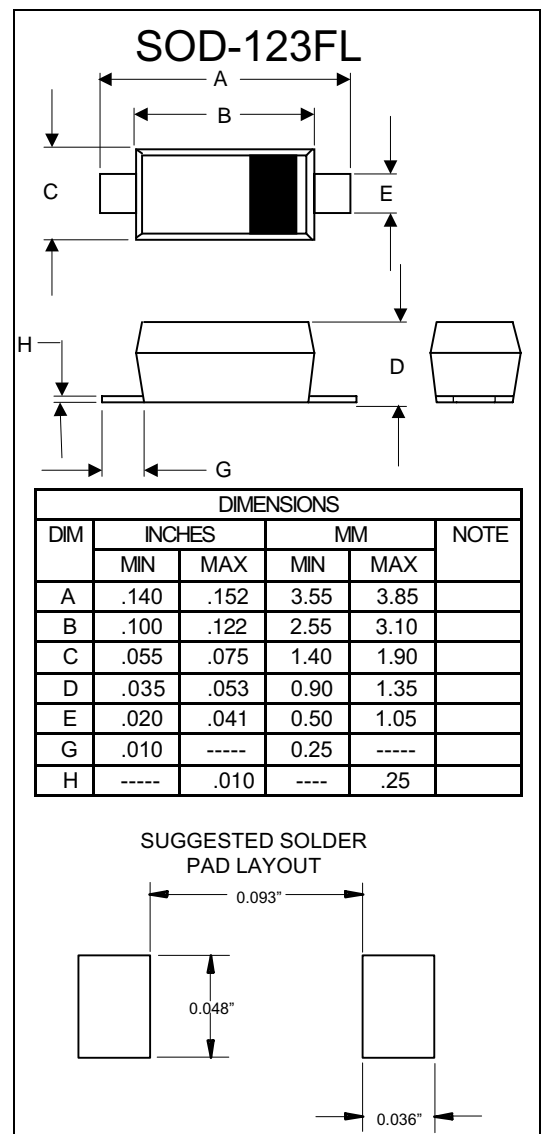


Table titled DIMENSIONS with columns DIM, INCHES (MIN, MAX), MM (MIN, MAX), and NOTE. Rows A through H provide specific dimension values.

SUGGESTED SOLDER PAD LAYOUT

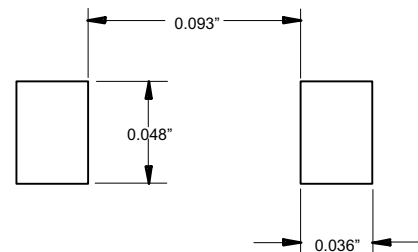

SMF5.0A THRU SMF170A
ELECTRICAL CHARACTERISTICS @25°C

| MCC PART NUMBER Uni-Polar | Marking Code | Breakdown Voltage $V_{BR} @ I_T$ (Volt) | | TEST CURRENT I_T mADC | RATED STANDOFF VOLTAGE V_{WM} V | MAXIMUM REVERSE LEAKAGE $I_b @ V_{WM}$ (μ A) | MAXIMUM CLAMPING VOLTAGE $V_C @ I_{PP}$ V | MAXIMUM PEAK PULSE CURRENT I_{PP} A |
|---------------------------------|-----------------|--|------|--------------------------------------|---|---|---|--|
| | | MIN | MAX | | | | | |
| SMF5.0A | 5.0A / KE | 6.4 | 7.0 | 10 | 5.0 | 400 | 9.2 | 21.7 |
| SMF6.0A | 6.0A / KG | 6.67 | 7.37 | 10 | 6.0 | 400 | 10.3 | 19.4 |
| SMF6.5A | 6.5A / KK | 7.22 | 7.98 | 10 | 6.5 | 250 | 11.2 | 17.9 |
| SMF7.0A | 7.0A / KM | 7.78 | 8.6 | 10 | 7.0 | 100 | 12 | 16.7 |
| SMF7.5A | 7.5A / KP | 8.33 | 9.21 | 1.0 | 7.5 | 50 | 12.9 | 15.5 |
| SMF8.0A | 8.0A / KR | 8.89 | 9.83 | 1.0 | 8.0 | 25 | 13.6 | 14.7 |
| SMF8.5A | 8.5A / KT | 9.44 | 10.4 | 1.0 | 8.5 | 10 | 14.4 | 13.9 |
| SMF9.0A | 9.0A / KV | 10 | 11.1 | 1.0 | 9.0 | 5.0 | 15.4 | 13 |
| SMF10A | 10A / KX | 11.1 | 12.3 | 1.0 | 10 | 2.5 | 17 | 11.8 |
| SMF11A | 11A / KZ | 12.2 | 13.5 | 1.0 | 11 | 2.5 | 18.2 | 11 |
| SMF12A | 12A / LE | 13.3 | 14.7 | 1.0 | 12 | 2.5 | 19.9 | 10.1 |
| SMF13A | 13A / LG | 14.4 | 15.9 | 1.0 | 13 | 1.0 | 21.5 | 9.3 |
| SMF14A | 14A / LK | 15.6 | 17.2 | 1.0 | 14 | 1.0 | 23.2 | 8.6 |
| SMF15A | 15A / LM | 16.7 | 18.5 | 1.0 | 15 | 1.0 | 24.4 | 8.2 |
| SMF16A | 16A / LP | 17.8 | 19.7 | 1.0 | 16 | 1.0 | 26 | 7.7 |
| SMF17A | 17A / LR | 18.9 | 20.9 | 1.0 | 17 | 1.0 | 27.6 | 7.2 |
| SMF18A | 18A / LT | 20 | 22.1 | 1.0 | 18 | 1.0 | 29.2 | 6.8 |
| SMF20A | 20A / LV | 22.2 | 24.5 | 1.0 | 20 | 1.0 | 32.4 | 6.2 |
| SMF22A | 22A / LX | 24.4 | 26.9 | 1.0 | 22 | 1.0 | 35.5 | 5.6 |
| SMF24A | 24A / LZ | 26.7 | 29.5 | 1.0 | 24 | 1.0 | 38.9 | 5.1 |
| SMF26A | 26A / ME | 28.9 | 31.9 | 1.0 | 26 | 1.0 | 42.1 | 4.8 |
| SMF28A | 28A / MG | 31.1 | 34.4 | 1.0 | 28 | 1.0 | 45.4 | 4.4 |
| SMF30A | 30A / MK | 33.3 | 36.8 | 1.0 | 30 | 1.0 | 48.4 | 4.1 |
| SMF33A | 33A / MM | 36.7 | 40.6 | 1.0 | 33 | 1.0 | 53.3 | 3.8 |
| SMF36A | 36A / MP | 40 | 44.2 | 1.0 | 36 | 1.0 | 58.1 | 3.4 |
| SMF40A | 40A / MR | 44.4 | 49.1 | 1.0 | 40 | 1.0 | 64.5 | 3.1 |
| SMF43A | 43A / MT | 47.8 | 52.8 | 1.0 | 43 | 1.0 | 69.4 | 2.9 |
| SMF45A | 45A / MV | 50 | 55.3 | 1.0 | 45 | 1.0 | 72.7 | 2.8 |
| SMF48A | 48A / MX | 53.3 | 58.9 | 1.0 | 48 | 1.0 | 77.4 | 2.6 |
| SMF51A | 51A / MZ | 56.7 | 62.7 | 1.0 | 51 | 1.0 | 82.4 | 2.4 |
| SMF54A | 54A / NE | 60 | 66.3 | 1.0 | 54 | 1.0 | 87.1 | 2.3 |
| SMF58A | 58A / NG | 64.4 | 71.2 | 1.0 | 58 | 1.0 | 93.6 | 2.1 |
| SMF60A | 60A / NK | 66.7 | 73.7 | 1.0 | 60 | 1.0 | 96.8 | 1.8 |
| SMF64A | 64A / NM | 71.1 | 78.6 | 1.0 | 64 | 1.0 | 103 | 1.7 |
| SMF70A | 70A / NP | 77.8 | 86 | 1.0 | 70 | 1.0 | 113 | 1.5 |
| SMF75A | 75A / NR | 83.3 | 92.1 | 1.0 | 75 | 1.0 | 121 | 1.4 |
| SMF78A | 78A / NT | 86.7 | 95.8 | 1.0 | 78 | 1.0 | 126 | 1.4 |
| SMF85A | 85A / NV | 94.4 | 104 | 1.0 | 85 | 1.0 | 137 | 1.3 |
| SMF90A | 90A / NX | 100 | 111 | 1.0 | 90 | 1.0 | 146 | 1.2 |
| SMF100A | 100 / NZ | 111 | 123 | 1.0 | 100 | 1.0 | 162 | 1.1 |
| SMF110A | 110 / PE | 122 | 135 | 1.0 | 110 | 1.0 | 177 | 1.0 |
| SMF120A | 120 / PG | 133 | 147 | 1.0 | 120 | 1.0 | 193 | 0.9 |
| SMF130A | 130 / PK | 144 | 159 | 1.0 | 130 | 1.0 | 209 | 0.8 |
| SMF150A | 150 / PM | 167 | 185 | 1.0 | 150 | 1.0 | 243 | 0.7 |
| SMF160A | 160 / PP | 178 | 197 | 1.0 | 160 | 1.0 | 259 | 0.7 |
| SMF170A | 170 / PR | 189 | 209 | 1.0 | 170 | 1.0 | 275 | 0.6 |

SMF5.0CA THRU SMF170CA
ELECTRICAL CHARACTERISTICS @25°C

| MCC PART NUMBER Bi-Polar | Marking Code | Breakdown Voltage $V_{BR} @ I_T$ (Volt) | | TEST CURRENT I_T mADC | RATED STANDOFF VOLTAGE V_{WM} V | MAXIMUM REVERSE LEAKAGE $I_b @ V_{WM}$ (μ A) | MAXIMUM CLAMPING VOLTAGE $V_C @ I_{PP}$ V | MAXIMUM PEAK PULSE CURRENT I_{PP} A |
|--------------------------------|-----------------|--|------|----------------------------------|---|---|---|--|
| | | MIN | MAX | | | | | |
| SMF5.0CA | 5.0CA / AE | 6.4 | 7.0 | 10 | 5.0 | 400 | 9.2 | 21.7 |
| SMF6.0CA | 6.0CA / AG | 6.67 | 7.37 | 10 | 6.0 | 400 | 10.3 | 19.4 |
| SMF6.5CA | 6.5CA / AK | 7.22 | 7.98 | 10 | 6.5 | 250 | 11.2 | 17.9 |
| SMF7.0CA | 7.0CA / AM | 7.78 | 8.6 | 10 | 7.0 | 100 | 12 | 16.7 |
| SMF7.5CA | 7.5CA / AP | 8.33 | 9.21 | 1.0 | 7.5 | 50 | 12.9 | 15.5 |
| SMF8.0CA | 8.0CA / AR | 8.89 | 9.83 | 1.0 | 8.0 | 25 | 13.6 | 14.7 |
| SMF8.5CA | 8.5CA / AT | 9.44 | 10.4 | 1.0 | 8.5 | 10 | 14.4 | 13.9 |
| SMF9.0CA | 9.0CA / AV | 10 | 11.1 | 1.0 | 9.0 | 5.0 | 15.4 | 13 |
| SMF10CA | 10CA / AX | 11.1 | 12.3 | 1.0 | 10 | 2.5 | 17 | 11.8 |
| SMF11CA | 11CA / AZ | 12.2 | 13.5 | 1.0 | 11 | 2.5 | 18.2 | 11 |
| SMF12CA | 12CA / BE | 13.3 | 14.7 | 1.0 | 12 | 2.5 | 19.9 | 10.1 |
| SMF13CA | 13CA / BG | 14.4 | 15.9 | 1.0 | 13 | 1.0 | 21.5 | 9.3 |
| SMF14CA | 14CA / BK | 15.6 | 17.2 | 1.0 | 14 | 1.0 | 23.2 | 8.6 |
| SMF15CA | 15CA / BM | 16.7 | 18.5 | 1.0 | 15 | 1.0 | 24.4 | 8.2 |
| SMF16CA | 16CA / BP | 17.8 | 19.7 | 1.0 | 16 | 1.0 | 26 | 7.7 |
| SMF17CA | 17CA / BR | 18.9 | 20.9 | 1.0 | 17 | 1.0 | 27.6 | 7.2 |
| SMF18CA | 18CA / BT | 20 | 22.1 | 1.0 | 18 | 1.0 | 29.2 | 6.8 |
| SMF20CA | 20CA / BV | 22.2 | 24.5 | 1.0 | 20 | 1.0 | 32.4 | 6.2 |
| SMF22CA | 22CA / BX | 24.4 | 26.9 | 1.0 | 22 | 1.0 | 35.5 | 5.6 |
| SMF24CA | 24CA / BZ | 26.7 | 29.5 | 1.0 | 24 | 1.0 | 38.9 | 5.1 |
| SMF26CA | 26CA / CE | 28.9 | 31.9 | 1.0 | 26 | 1.0 | 42.1 | 4.8 |
| SMF28CA | 28CA / CG | 31.1 | 34.4 | 1.0 | 28 | 1.0 | 45.4 | 4.4 |
| SMF30CA | 30CA / CK | 33.3 | 36.8 | 1.0 | 30 | 1.0 | 48.4 | 4.1 |
| SMF33CA | 33CA / CM | 36.7 | 40.6 | 1.0 | 33 | 1.0 | 53.3 | 3.8 |
| SMF36CA | 36CA / CP | 40 | 44.2 | 1.0 | 36 | 1.0 | 58.1 | 3.4 |
| SMF40CA | 40CA / CR | 44.4 | 49.1 | 1.0 | 40 | 1.0 | 64.5 | 3.1 |
| SMF43CA | 43CA / CT | 47.8 | 52.8 | 1.0 | 43 | 1.0 | 69.4 | 2.9 |
| SMF45CA | 45CA / CV | 50 | 55.3 | 1.0 | 45 | 1.0 | 72.7 | 2.8 |
| SMF48CA | 48CA / CX | 53.3 | 58.9 | 1.0 | 48 | 1.0 | 77.4 | 2.6 |
| SMF51CA | 51CA / CZ | 56.7 | 62.7 | 1.0 | 51 | 1.0 | 82.4 | 2.4 |
| SMF54CA | 54CA / DE | 60 | 66.3 | 1.0 | 54 | 1.0 | 87.1 | 2.3 |
| SMF58CA | 58CA / DG | 64.4 | 71.2 | 1.0 | 58 | 1.0 | 93.6 | 2.1 |
| SMF60CA | 60CA / DK | 66.7 | 73.7 | 1.0 | 60 | 1.0 | 96.8 | 1.8 |
| SMF64CA | 64CA / DM | 71.1 | 78.6 | 1.0 | 64 | 1.0 | 103 | 1.7 |
| SMF70CA | 70CA / DP | 77.8 | 86 | 1.0 | 70 | 1.0 | 113 | 1.5 |
| SMF75CA | 75CA / DR | 83.3 | 92.1 | 1.0 | 75 | 1.0 | 121 | 1.4 |
| SMF78CA | 78CA / DT | 86.7 | 95.8 | 1.0 | 78 | 1.0 | 126 | 1.4 |
| SMF85CA | 85CA / DV | 94.4 | 104 | 1.0 | 85 | 1.0 | 137 | 1.3 |
| SMF90CA | 90CA / DX | 100 | 111 | 1.0 | 90 | 1.0 | 146 | 1.2 |
| SMF100CA | 100C / DZ | 111 | 123 | 1.0 | 100 | 1.0 | 162 | 1.1 |
| SMF110CA | 110C / EE | 122 | 135 | 1.0 | 110 | 1.0 | 177 | 1.0 |
| SMF120CA | 120C / EG | 133 | 147 | 1.0 | 120 | 1.0 | 193 | 0.9 |
| SMF130CA | 130C / EK | 144 | 159 | 1.0 | 130 | 1.0 | 209 | 0.8 |
| SMF150CA | 150C / EM | 167 | 185 | 1.0 | 150 | 1.0 | 243 | 0.7 |
| SMF160CA | 160C / EP | 178 | 197 | 1.0 | 160 | 1.0 | 259 | 0.7 |
| SMF170CA | 170C / ER | 189 | 209 | 1.0 | 170 | 1.0 | 275 | 0.6 |

SMF5.0CA THRU SMF170CA

Electrical Characteristics

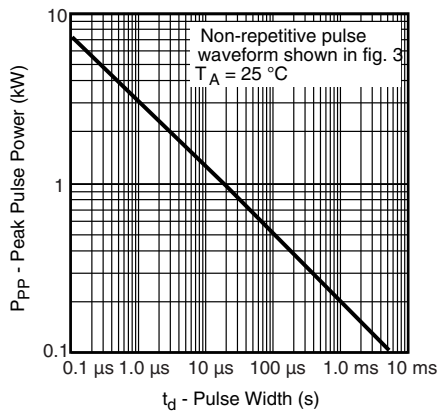


Fig. 1 - Peak Pulse Power Rating

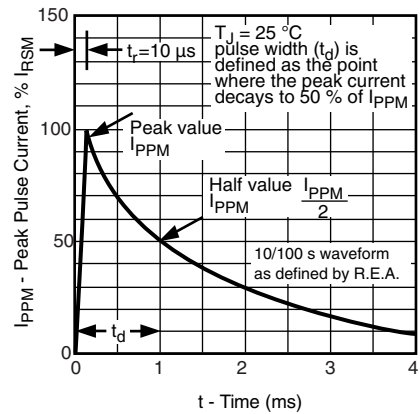


Fig. 3 - Pulse Waveform

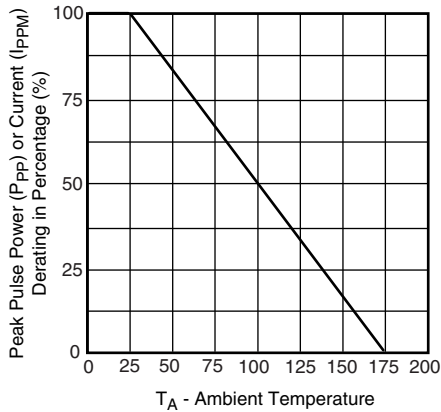


Fig. 2 - Pulse Derating Curve



Micro Commercial Components

Ordering Information :

| Device | Packing |
|----------------|-------------------------|
| Part Number-TP | Tape&Reel: 2.5Kpcs/Reel |

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com