


Technical Data Sheet

Rosenberger

Cable assembly
7/16 Plug / 7/16 Plug – RTK 081 Cable

LA2-020-XXX

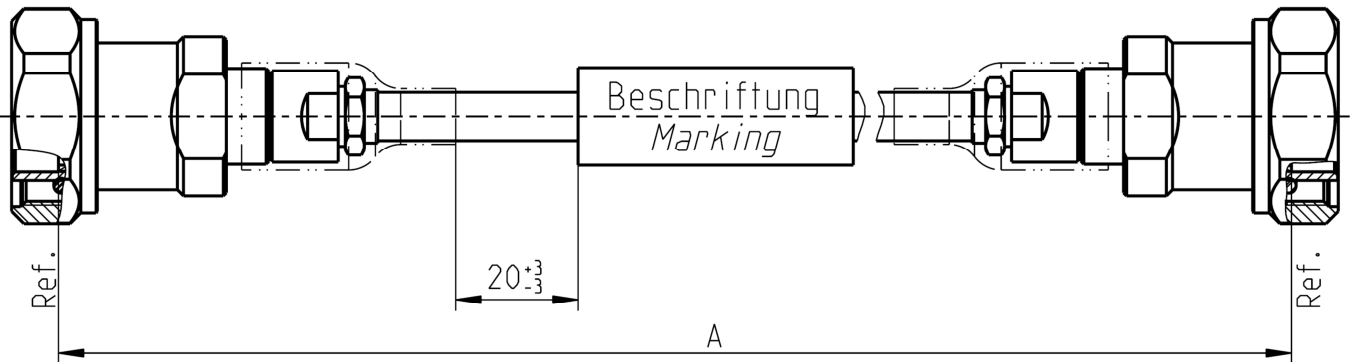

All dimensions are in mm; tolerances: ± 3 mm for $A \leq 300$ mm; $\pm 1\%$ for $A > 300$ mm

Available variants

Type	max. Insertion loss at X GHz	Marking	Weight (g) / pce
LA2-020-XXX	$\leq 0.0005 \text{ dB/mm} * A \text{ mm} + 0.3 \text{ dB}$	ROSENBERGER YYY-YY LA2-020-XXX FAC-RRRRRRR ssss	$0.138 \text{ g/mm} * A \text{ mm} + 290 \text{ g}$

XXX – length in mm = A

YY – week

YYYY – year

ssss – serial no.

FAC – Factory Code

RRRRRRR – lot nr.

Note:

max. Insertion Loss:

First constant = Cable attenuation in dB /mm; Second Constant = Connector left and Connector right +needed Adaptor

Weight:

First constant = Cable- and Armour- weight per mm; Second Constant = Connector left and Connector right weight per pce

Assembly parts

Connector left	7/16 plug	60S151-2A2N1
Connector right	7/16 plug	60S151-2A2N1
Cable	RTK 081	

Electrical data

Impedance	50 Ω
Frequency	DC to 8 GHz
Return loss ¹	$\geq 19 \text{ dB}$, DC to 8.0 GHz
Insertion loss ¹	see table available variants

Individual testing and documentation:

Measurement plot with all 4 S-Parameters (S11; S22; S21; S12) is included with the cable assembly and on the backside the care and handling instruction is printed. Measurement adaptors used are mentioned in the commentary field.

¹ Return Loss and Insertion Loss includes the measurement adaptor

Technical Data Sheet

Rosenberger

Cable assembly
7/16 Plug / 7/16 Plug – RTK 081 Cable

LA2-020-XXX

Mechanical data

Minimum bend radius:

Single 31.75 mm
Multiple 76.2 mm

Environmental data

Temperature range -40°C to +85°C
RoHS compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Martin Moder	20.01.12	A.Schadhauser	12.03.15	c00	15-s122	Maik Knoll	12.03.15

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de	Tel. : +49 8684 18-0 Email : info@rosenberger.de	Page 2 / 2
--	--	---------------