
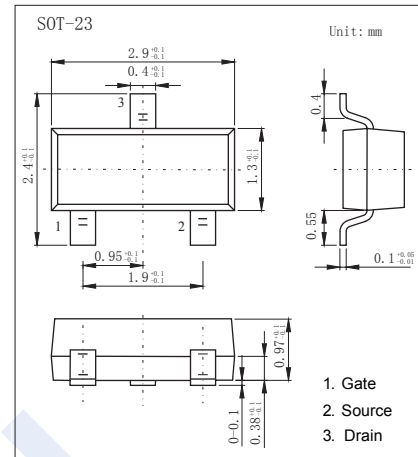


N-Channel MOSFET

AO3434A-HF (KO3434A-HF)

■ Features

- $V_{DS} (V) = 30V$
- $I_D = 4 A (V_{GS} = 10V)$
- $R_{DS(ON)} < 52m\Omega (V_{GS} = 10V)$
- $R_{DS(ON)} < 60m\Omega (V_{GS} = 4.5V)$
- $R_{DS(ON)} < 78m\Omega (V_{GS} = 2.5V)$
- Pb-Free Package May be Available. The G-Suffix Denotes a Pb-Free Lead Finish



■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit	
Drain-Source Voltage	V_{DS}	30	V	
Gate-Source Voltage	V_{GS}	± 12		
Continuous Drain Current	I_D	$T_A = 25^\circ C$	4	A
		$T_A = 70^\circ C$	3	
Pulsed Drain Current	I_{DM}	20		
Power Dissipation	P_D	$T_A = 25^\circ C$	1.4	W
		$T_A = 70^\circ C$	0.9	
Thermal Resistance.Junction- to-Ambient	R_{thJA}	$t \leq 10s$	90	$^\circ C/W$
		Steady-State	125	
Thermal Resistance.Junction- to-Case	R_{thJC}	80		
Junction Temperature	T_J	150	$^\circ C$	
Storage Temperature Range	T_{stg}	-55 to 150		

N-Channel MOSFET

AO3434A-HF (KO3434A-HF)

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit	
Drain-Source Breakdown Voltage	V _{DSS}	I _D =250 μA, V _{GS} =0V	30			V	
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =30V, V _{GS} =0V			1	μA	
		V _{DS} =30V, V _{GS} =0V, T _J =55°C			5		
Gate-Body Leakage Current	I _{GSS}	V _{DS} =0V, V _{GS} =±10V			±10	μA	
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250 μA	0.7		1.5	V	
Static Drain-Source On-Resistance	R _{DS(on)}	V _{GS} =10V, I _D =4A			52	mΩ	
		V _{GS} =10V, I _D =4A, T _J =125°C			82		
		V _{GS} =4.5V, I _D =3A			60		
		V _{GS} =2.5V, I _D =2A			78		
On state drain current	I _{D(ON)}	V _{GS} =10V, V _{DS} =5V	20			A	
Forward Transconductance	g _{FS}	V _{DS} =5V, I _D =4A		15		S	
Input Capacitance	C _{iss}	V _{GS} =0V, V _{DS} =15V, f=1MHz		245		pF	
Output Capacitance	C _{oss}			35			
Reverse Transfer Capacitance	C _{rss}			20			
Gate Resistance	R _g		V _{GS} =0V, V _{DS} =0V, f=1MHz		5		
Total Gate Charge (10V)	Q _g	V _{GS} =10V, V _{DS} =15V, I _D =4A		5.7	10	nC	
Total Gate Charge (4.5V)				2.6	5		
Gate Source Charge			Q _{gs}		0.5		
Gate Drain Charge			Q _{gd}		1		
Turn-On DelayTime			t _{d(on)}	V _{GS} =10V, V _{DS} =15V, R _L =3.75 Ω, R _G =3 Ω			2
Turn-On Rise Time	t _r		3.5				
Turn-Off DelayTime	t _{d(off)}		22				
Turn-Off Fall Time	t _f		3.5				
Body Diode Reverse Recovery Time	t _{rr}	I _F = 4A, di/dt= 500A/us		6.5		nC	
Body Diode Reverse Recovery Charge	Q _{rr}			7.5			
Maximum Body-Diode Continuous Current	I _S				1.5	A	
Diode Forward Voltage	V _{SD}	I _S =1A, V _{GS} =0V			1	V	

* The static characteristics in Figures 1 to 6 are obtained using <300us pulses, duty cycle 0.5% max.

■ Marking

Marking	Y4** F
---------	--------

N-Channel MOSFET AO3434A-HF (KO3434A-HF)

■ Typical Characteristics

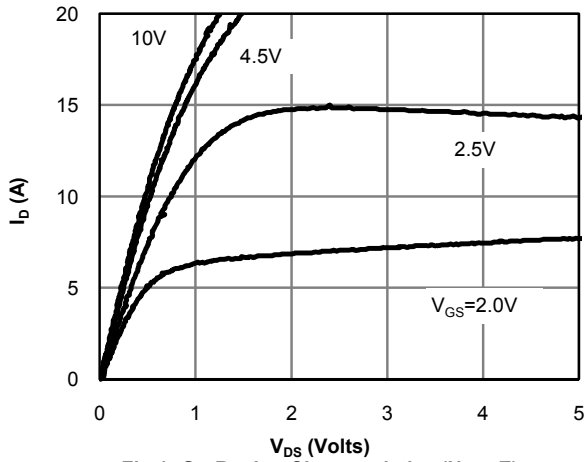


Fig 1: On-Region Characteristics (Note E)

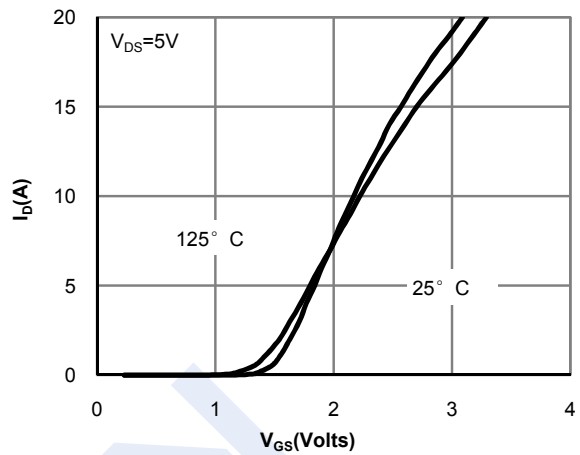


Figure 2: Transfer Characteristics (Note E)

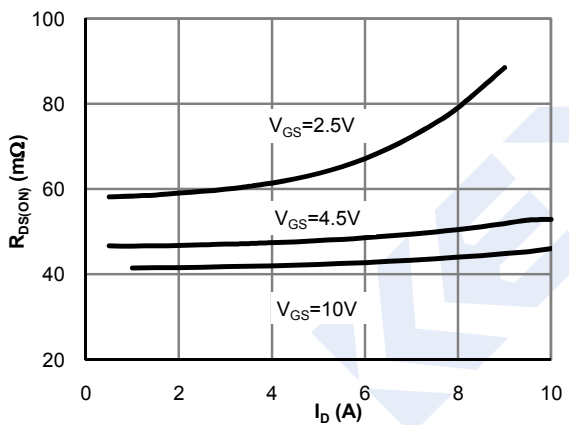


Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

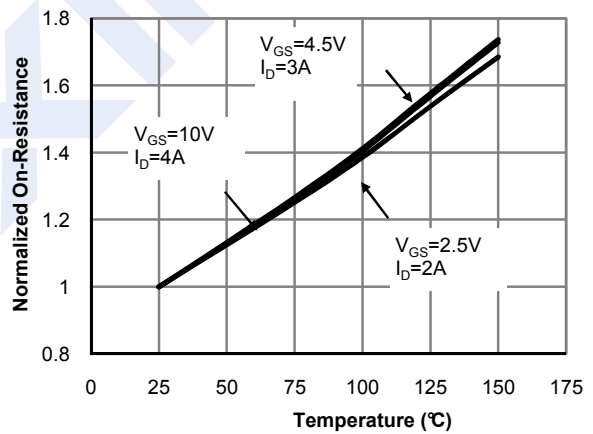


Figure 4: On-Resistance vs. Junction Temperature (Note E)

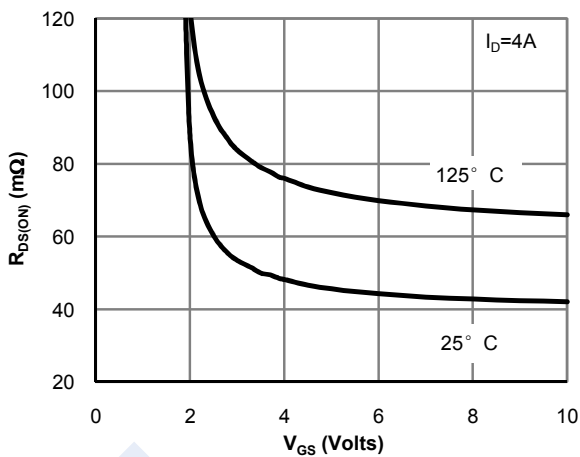


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

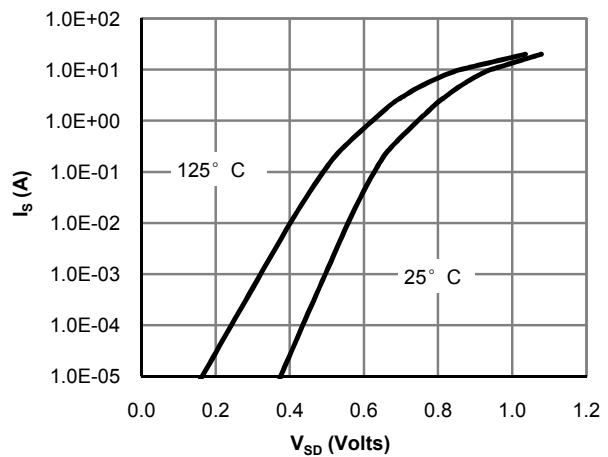


Figure 6: Body-Diode Characteristics (Note E)

N-Channel MOSFET AO3434A-HF (KO3434A-HF)

■ Typical Characteristics

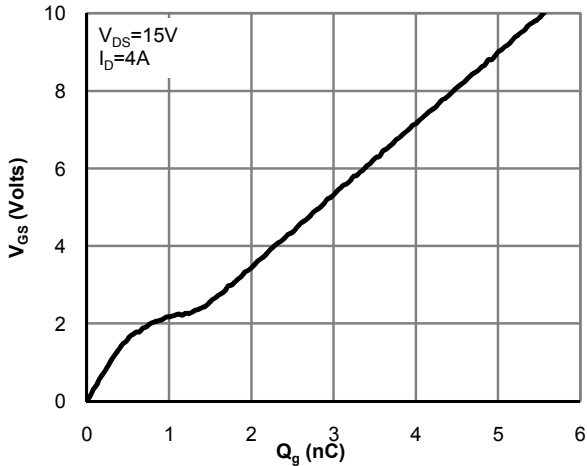


Figure 7: Gate-Charge Characteristics

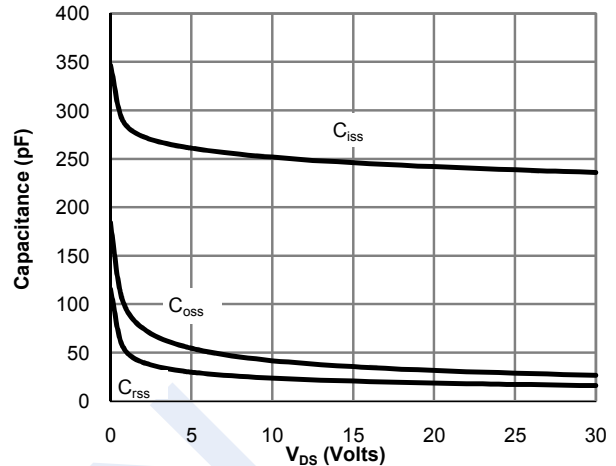


Figure 8: Capacitance Characteristics

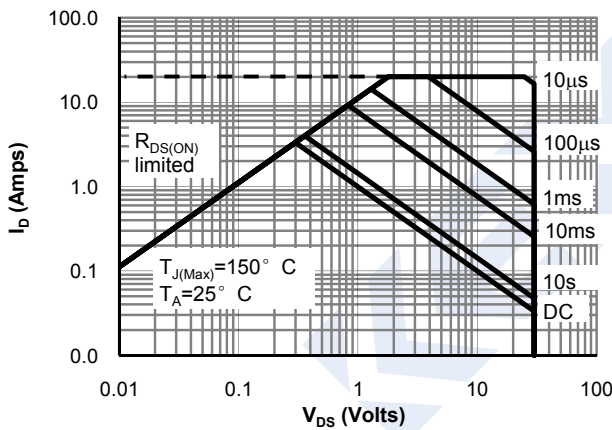


Figure 9: Maximum Forward Biased Safe Operating Area (Note F)

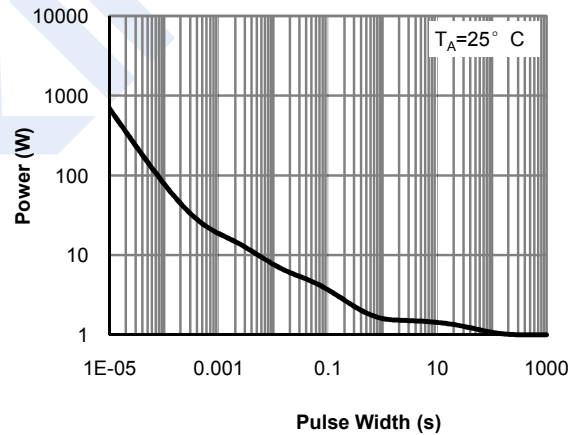


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note F)

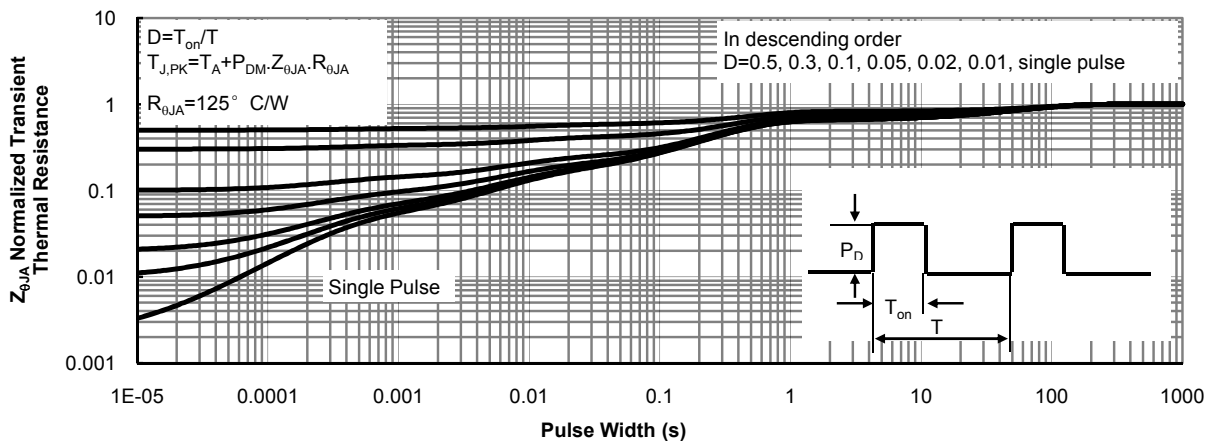


Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)