

Carrier Tape Change for all Right Angle DomiLED DSx
Product Change Notice issued on 18 May 2015.

DomiLED™

Synonymous with function and performance, the DomiLED™ series is perfectly suited for a variety of cross-industrial applications due to its small package outline, durability and superior brightness.



Features:

- > High brightness surface mount LED.
- > Designed for sideway illumination.
- > 120° viewing angle.
- > Small package outline.
- > Qualified according to JEDEC moisture sensitivity Level 2.
- > Compatible to IR reflow soldering.
- > Environmental friendly; RoHS compliance.
- > Qualified based on AEC-Q101 Standard.



Applications:

- > Automotive: interior applications, eg: switches, telematics, climate control system, dashboard, etc.
- > Consumer Appliances: LCD illumination as in PDAs, LCD TV.
- > Display: full color display video notice board.
- > Industry: white goods (eg: Oven, microwave, etc.).



Optical Characteristics at T_j=25°C

Part Ordering Number	Color	Viewing Angle°	Luminous Intensity @ 20mA	IV (mcd)	
			Min.	Typ.	Max.
● DSW-LSG-V2W-1	White	120	900.0	1400.0	1800.0
DSW-LSG-WX1-1	White	120	1125.0	1800.0	2240.0
DSW-LSG-WX1-JKPL	White	120	1125.0	1800.0	2240.0

● Not for new design

NOTE

- All part number above comes in a quantity of 2500 units per reel.
- Luminous intensity is measured with an accuracy of ± 11%.
- Color binning is carried for all units as per the color-binning table. Only one color group is allowed for each reel.

Part Number	Vf @ If = 20mA			Vr @ Ir = 10uA
	Min. (V)	Typ. (V)	Max. (V)	Min. (V)
DSW-LSG	2.8	3.2	3.6	5.0


Forward voltage, Vf is measured with an accuracy of ± 0.1 V.

Absolute Maximum Ratings

	Maximum Value	Unit
DC forward current	20	mA
Peak pulse current; (tp ≤ 10μs, Duty cycle = 0.005)	100	mA
Reverse voltage; Ir (max) = 10uA	5	V
ESD threshold (HBM)	2000	V
LED junction temperature	125	°C
Operating temperature	-40 ... +100	°C
Storage temperature	-40 ... +100	°C
Power dissipation (at room temperature)	80	mW
Thermal resistance		
- Junction / ambient, R _{th} JA	460	K/W
- Junction / solder point, R _{th} JS	240	K/W
(Mounting on FR4 PCB, pad size >= 5 mm ² per pad)		

White Color Grouping

For this color bin selection, part number will be DSW-LSG-xxxx-1

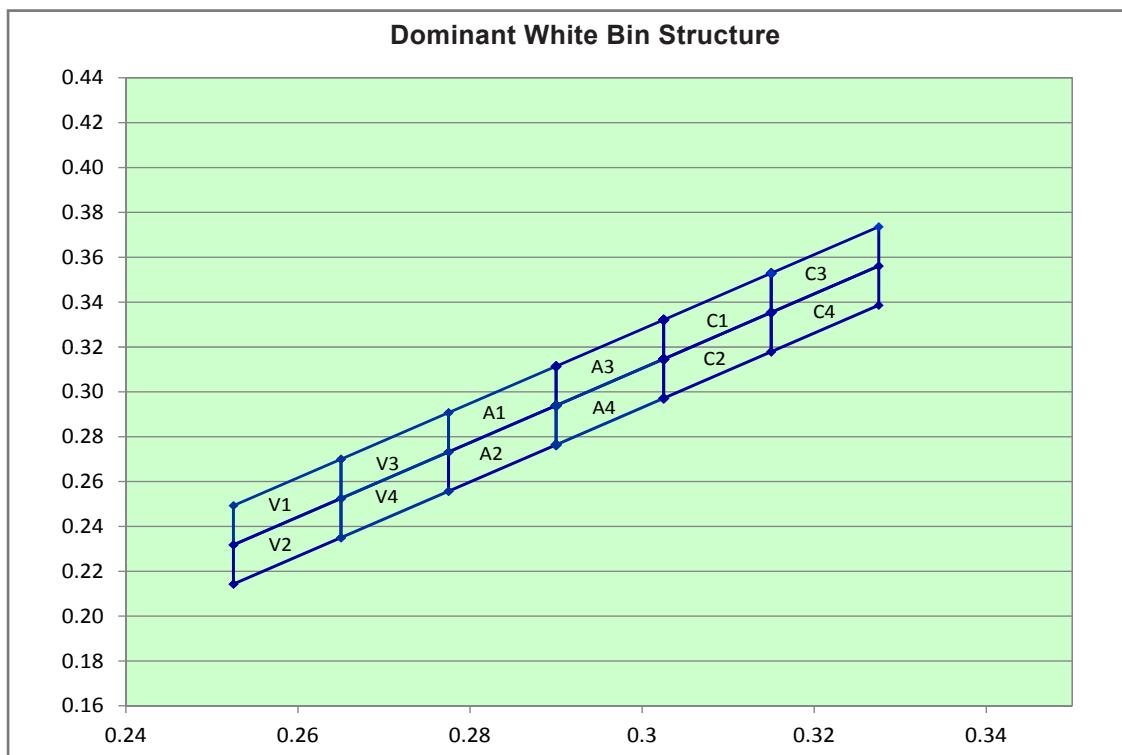


Chromaticity coordinate groups are measured with an accuracy of ± 0.01 .

Bin		1	2	3	4
V1	Cx	0.2525	0.2650	0.2650	0.2525
	Cy	0.2318	0.2525	0.2700	0.2493
V2	Cx	0.2525	0.2650	0.2650	0.2525
	Cy	0.2143	0.2350	0.2525	0.2318
V3	Cx	0.2650	0.2775	0.2775	0.2650
	Cy	0.2525	0.2732	0.2907	0.2700
V4	Cx	0.2650	0.2775	0.2775	0.2650
	Cy	0.2350	0.2557	0.2732	0.2525
A1	Cx	0.2775	0.2900	0.2900	0.2775
	Cy	0.2732	0.2939	0.3114	0.2907
A2	Cx	0.2775	0.2900	0.2900	0.2775
	Cy	0.2557	0.2764	0.2939	0.2732
A3	Cx	0.2900	0.3025	0.3025	0.2900
	Cy	0.2939	0.3146	0.3321	0.3114
A4	Cx	0.2900	0.3025	0.3025	0.2900
	Cy	0.2764	0.2971	0.3146	0.2939
C1	Cx	0.3025	0.3150	0.3150	0.3025
	Cy	0.3146	0.3354	0.3529	0.3321
C2	Cx	0.3025	0.3150	0.3150	0.3025
	Cy	0.2971	0.3179	0.3354	0.3146
C3	Cx	0.3150	0.3275	0.3275	0.3150
	Cy	0.3354	0.3561	0.3736	0.3529
C4	Cx	0.3150	0.3275	0.3275	0.3150
	Cy	0.3179	0.3386	0.3561	0.3354

Dominant color coordinate is measured with an accuracy of ± 0.01 .

White Color Grouping

For this color bin selection, part number will be DSW-LSG-xxxx-1 (**Not Offer For New Design**)

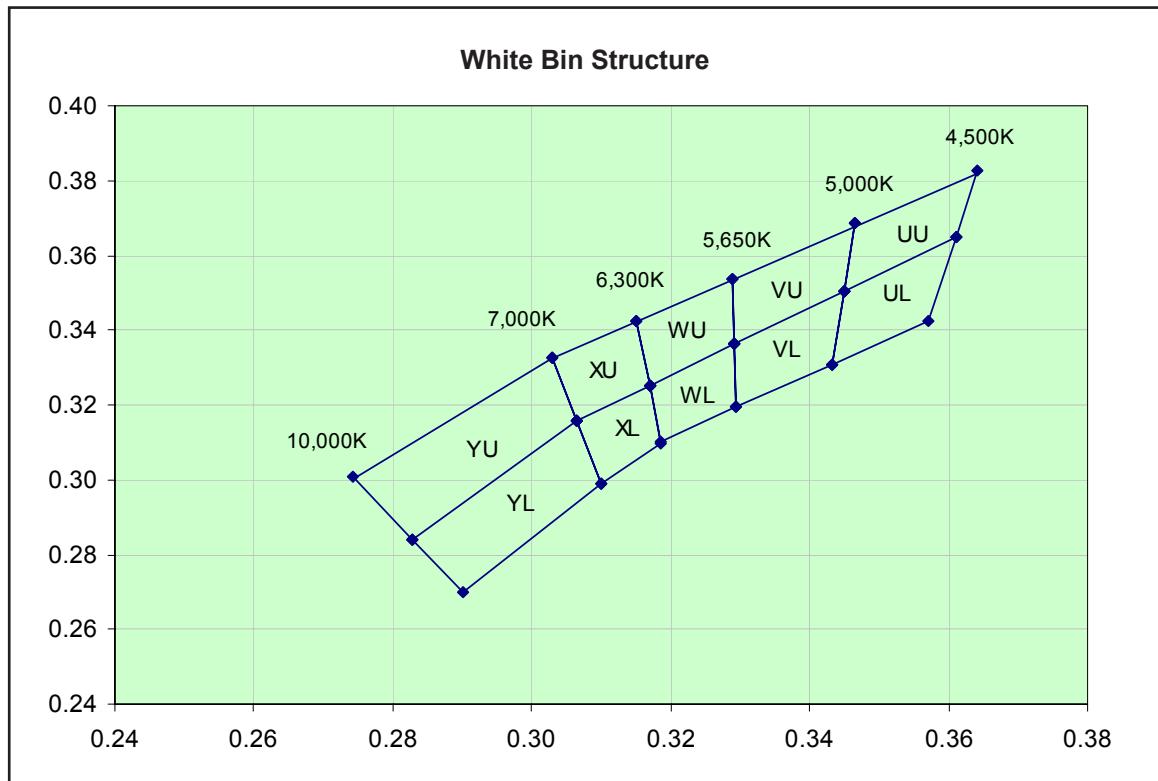


Chromaticity coordinate groups are measured with an accuracy of ± 0.01 .

Bin		1	2	3	4
YU	Cx	0.274	0.283	0.307	0.303
	Cy	0.301	0.284	0.316	0.333
YL	Cx	0.283	0.290	0.310	0.307
	Cy	0.284	0.270	0.299	0.316
XU	Cx	0.303	0.307	0.317	0.315
	Cy	0.333	0.316	0.325	0.343
XL	Cx	0.307	0.310	0.319	0.317
	Cy	0.316	0.299	0.310	0.325
WU	Cx	0.315	0.317	0.329	0.329
	Cy	0.343	0.325	0.336	0.354
WL	Cx	0.317	0.319	0.329	0.329
	Cy	0.325	0.310	0.319	0.336
VU	Cx	0.329	0.329	0.345	0.347
	Cy	0.354	0.336	0.350	0.368
VL	Cx	0.329	0.329	0.343	0.345
	Cy	0.336	0.319	0.331	0.350
UU	Cx	0.347	0.345	0.361	0.364
	Cy	0.368	0.350	0.365	0.383
UL	Cx	0.345	0.343	0.357	0.361
	Cy	0.350	0.331	0.343	0.365

InGaN wavelength is very sensitive to drive current. Operating at lower current is not recommended and may yield unpredictable performance. Current pulsing should be used for dimming purposes.

White Color Grouping

For this color bin selection, part number will be DSW-LSG-xxxx-JKPL

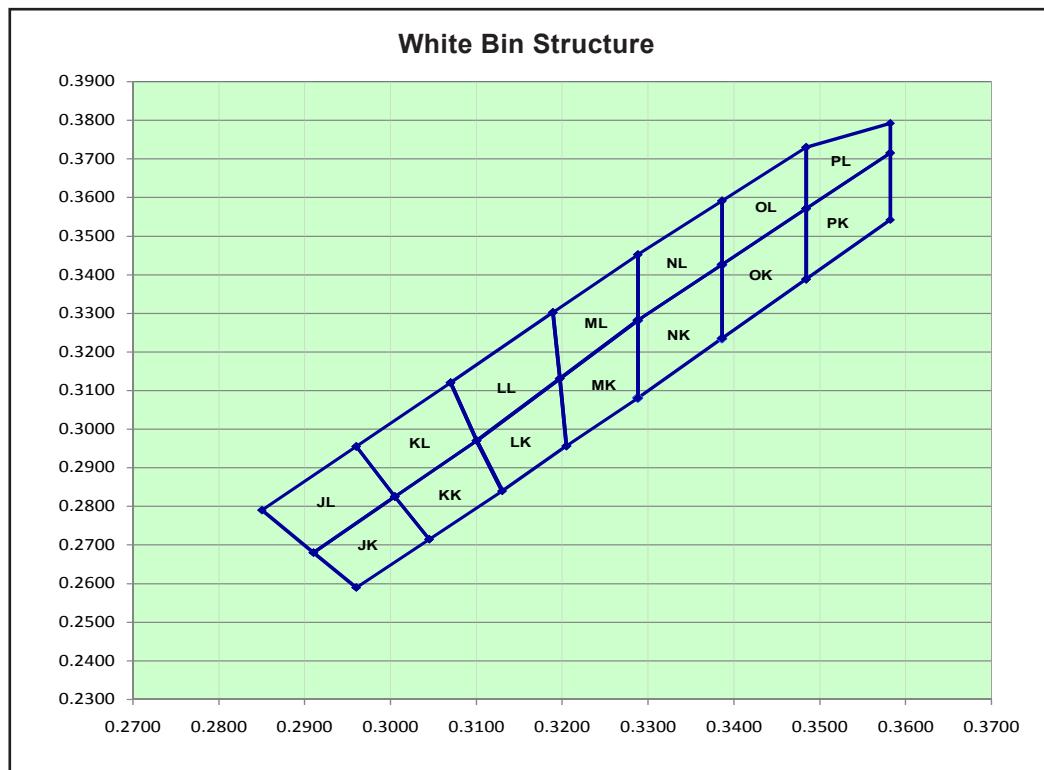

Chromaticity coordinate groups are measured with an accuracy of ± 0.01 .

Bin		1	2	3	4
JK	Cx	0.2960	0.2910	0.3005	0.3045
	Cy	0.2590	0.2680	0.2825	0.2715
JL	Cx	0.291	0.2850	0.2960	0.3005
	Cy	0.2680	0.2790	0.2955	0.2825
KK	Cx	0.3045	0.3005	0.3100	0.3130
	Cy	0.2715	0.2825	0.2970	0.2840
KL	Cx	0.3005	0.2960	0.3070	0.3100
	Cy	0.2825	0.2955	0.3120	0.2970
NK	Cx	0.3288	0.3288	0.3386	0.3386
	Cy	0.3081	0.3282	0.3426	0.3235
NL	Cx	0.3288	0.3288	0.3386	0.3386
	Cy	0.3282	0.3453	0.3591	0.3426
OK	Cx	0.3386	0.3386	0.3484	0.3484
	Cy	0.3235	0.3426	0.3571	0.3388
OL	Cx	0.3386	0.3386	0.3484	0.3484
	Cy	0.3426	0.3591	0.3730	0.3571
LK	Cx	0.3100	0.3197	0.3205	0.3130
	Cy	0.2970	0.3131	0.2956	0.2840
LL	Cx	0.3070	0.3189	0.3197	0.3100
	Cy	0.3120	0.3302	0.3131	0.2970

Bin		1	2	3	4
MK	Cx	0.3197	0.3288	0.3288	0.3205
	Cy	0.3131	0.3282	0.3081	0.2956
ML	Cx	0.3189	0.3288	0.3288	0.3197
	Cy	0.3302	0.3452	0.3282	0.3131
PK	Cx	0.3484	0.3484	0.3582	0.3582
	Cy	0.3388	0.3571	0.3715	0.3542
PL	Cx	0.3484	0.3484	0.3582	0.3582
	Cy	0.3571	0.3730	0.3792	0.3715

InGaN wavelength is very sensitive to drive current. Operating at lower current is not recommended and may yield unpredictable performance.
 Current pulsing should be used for dimming purposes.

Luminous Intensity Group at T_j=25°C

Brightness Group	Luminous Intensity IV (mcd)
V2	900.0 ... 1125.0
W1	1125.0 ... 1400.0
W2	1400.0 ... 1800.0
X1	1800.0 ... 2240.0

Luminous intensity is measured with an accuracy of ± 11%.


Vf Binning (Optional)

Vf Bin @ 20mA	Forward Voltage (V)
V1	2.75 ... 3.05
V2	3.05 ... 3.35
V3	3.35 ... 3.65


Forward voltage, Vf is measured with an accuracy of ± 0.1 V.

Please consult sales and marketing for special part number to incorporate Vf binning.


Relative Intensity Vs Forward Current

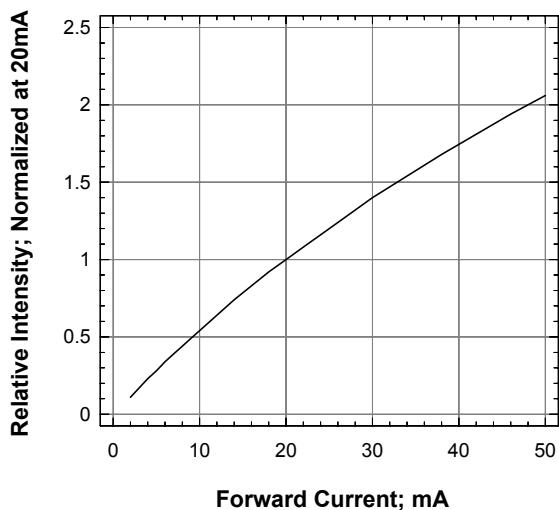


Forward Current Vs Forward Voltage

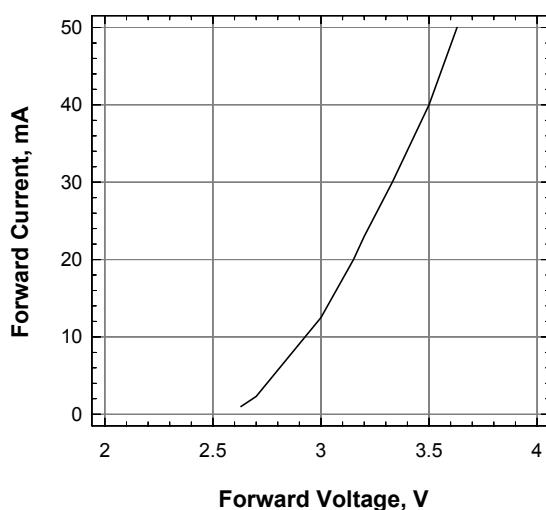


Maximum Forward Current Vs Ambient Temperature

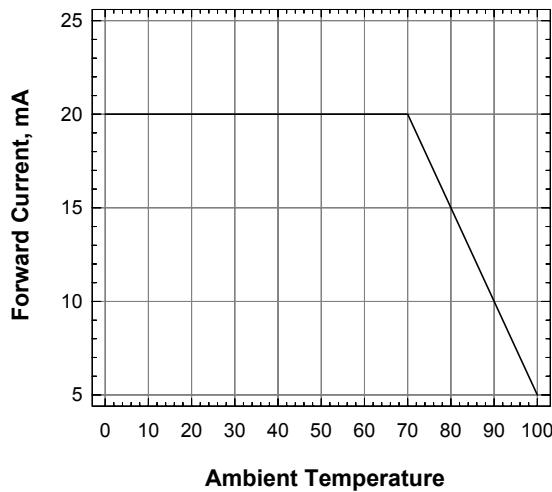


Relative Intensity Vs Wavelength

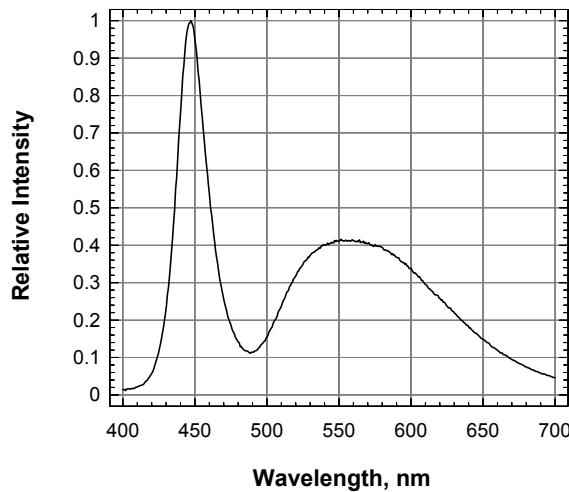


Chromaticity Coordinate Shift

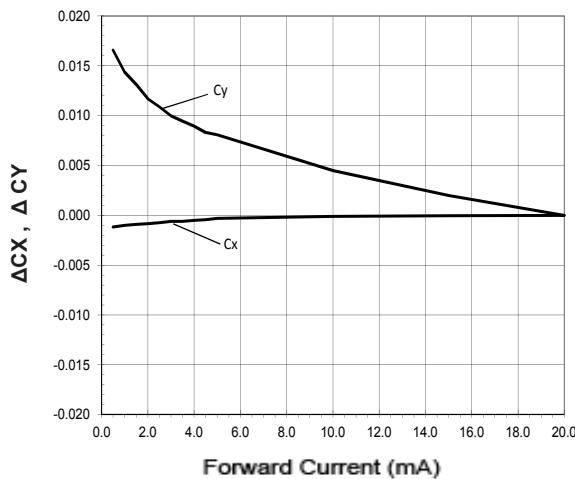

Radiation Pattern

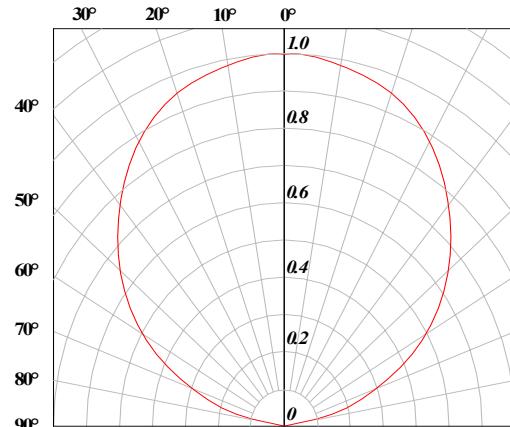

DomiLED™ • InGaN White : DSW-LSG Package Outlines

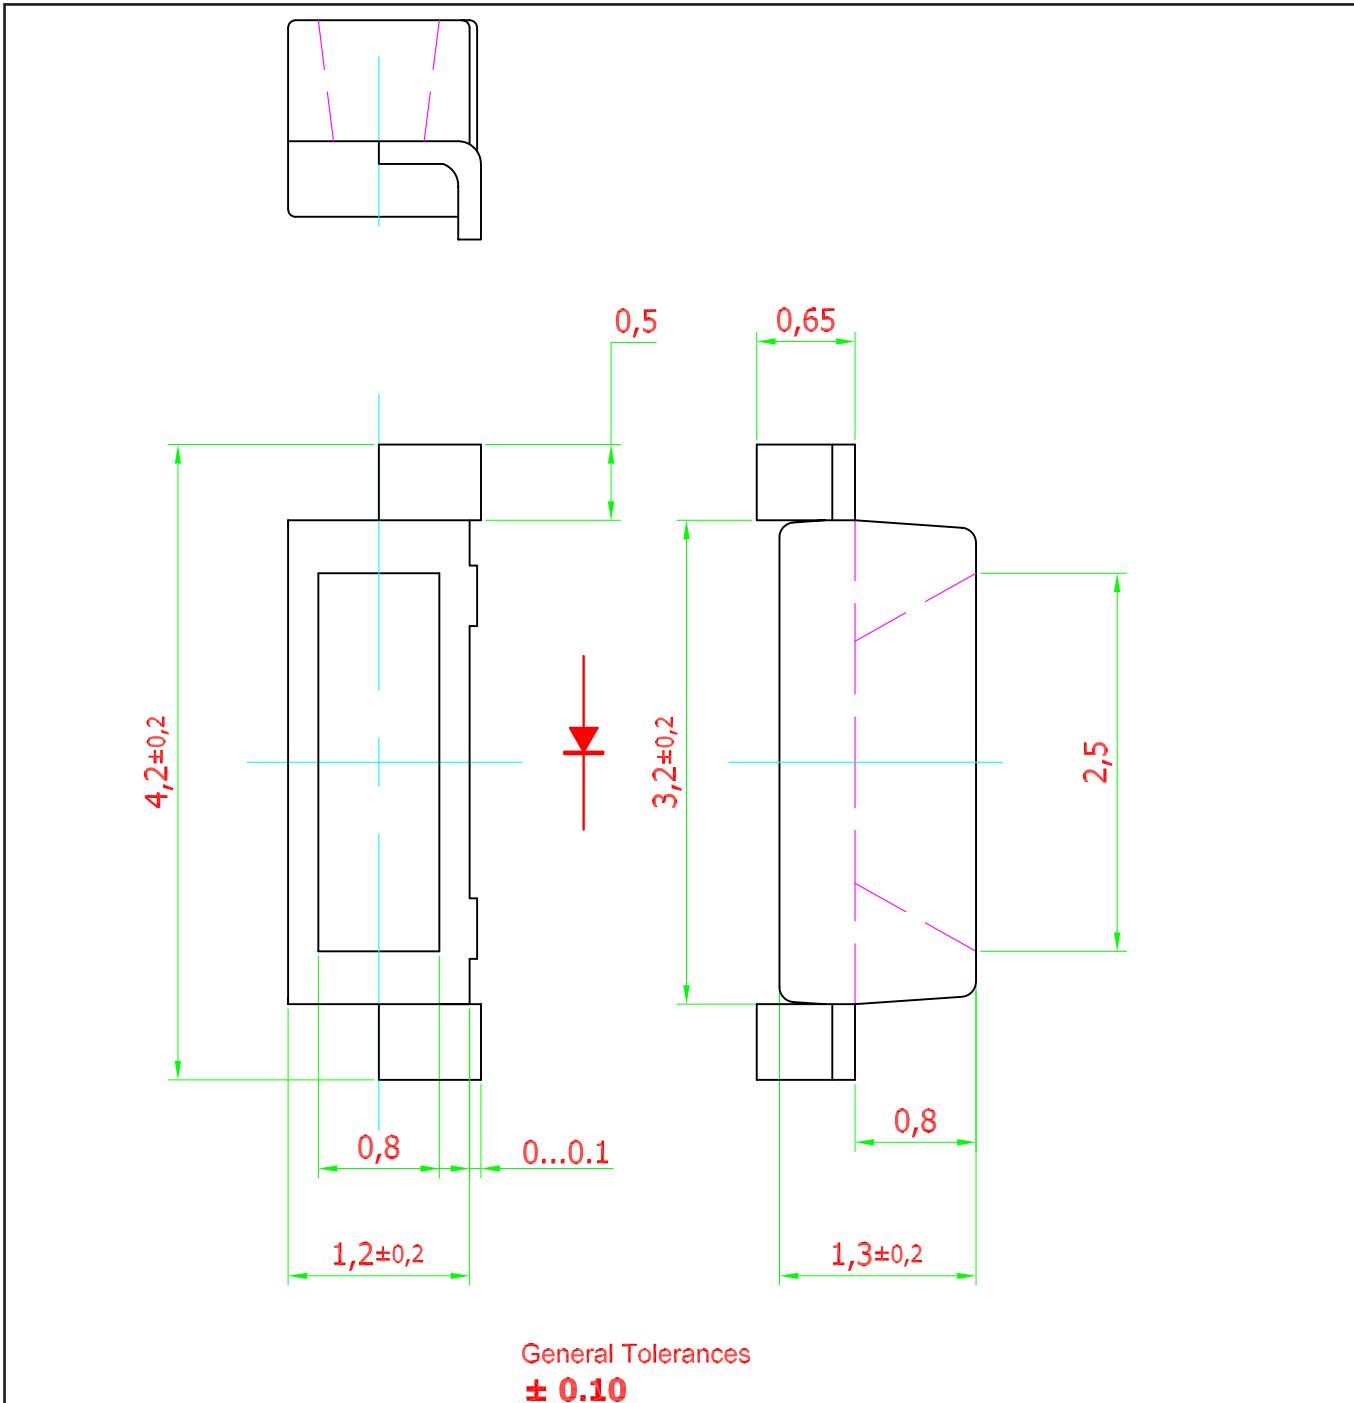

Material

Material

Lead-frame

Cu Alloy With Ag Plating

Package

High Temperature Resistant Plastic, PPA


Encapsulant

Silicone Resin

Soldering Leads

Sn-Sn Plating

Recommended Solder Pad

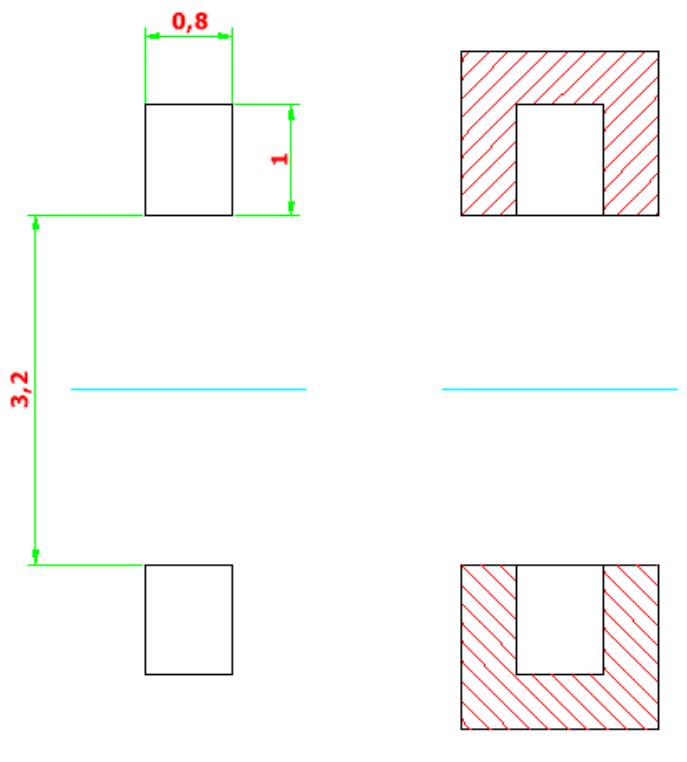


Pad design for better heat dissipation.


Solder resist.

Taping and orientation


- Reels come in quantity of 2500 units.
- Reel diameter is 180 mm.

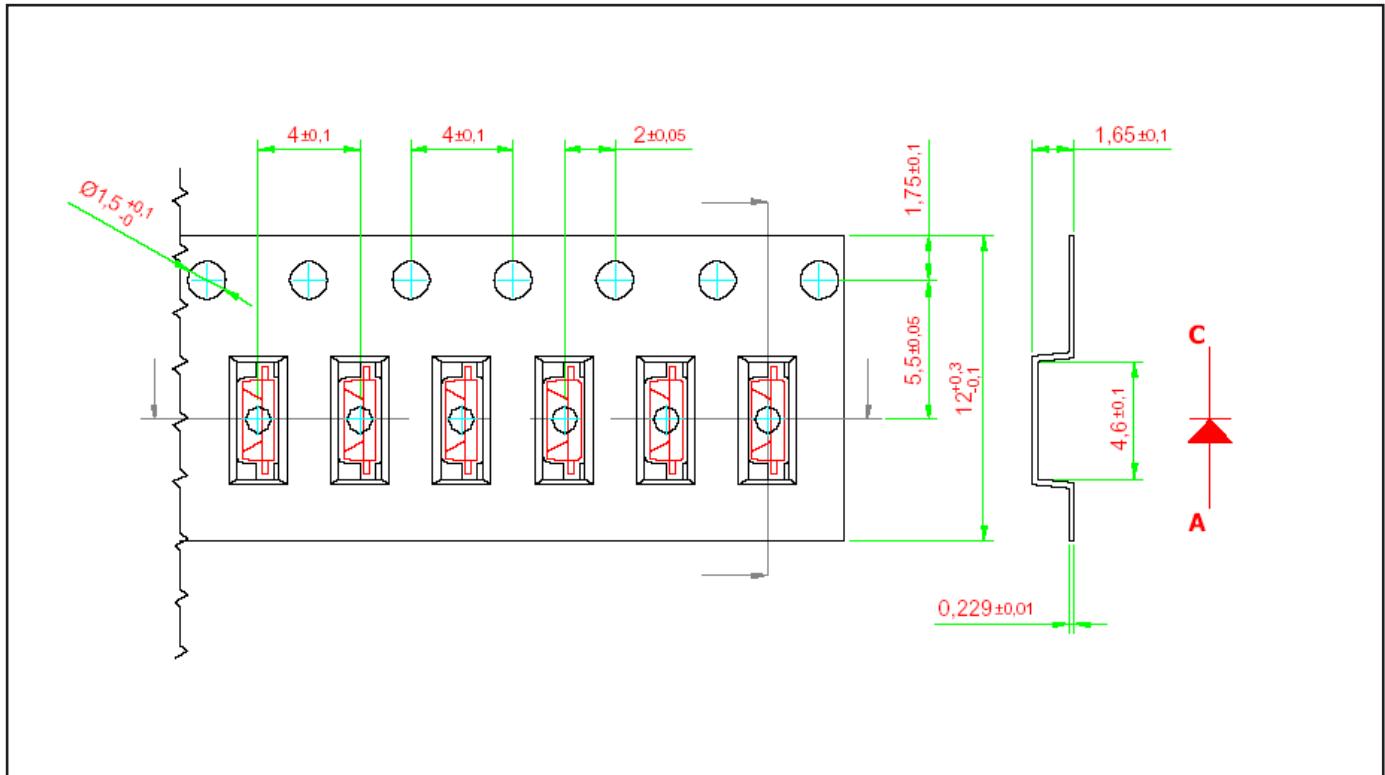


Packaging Specification

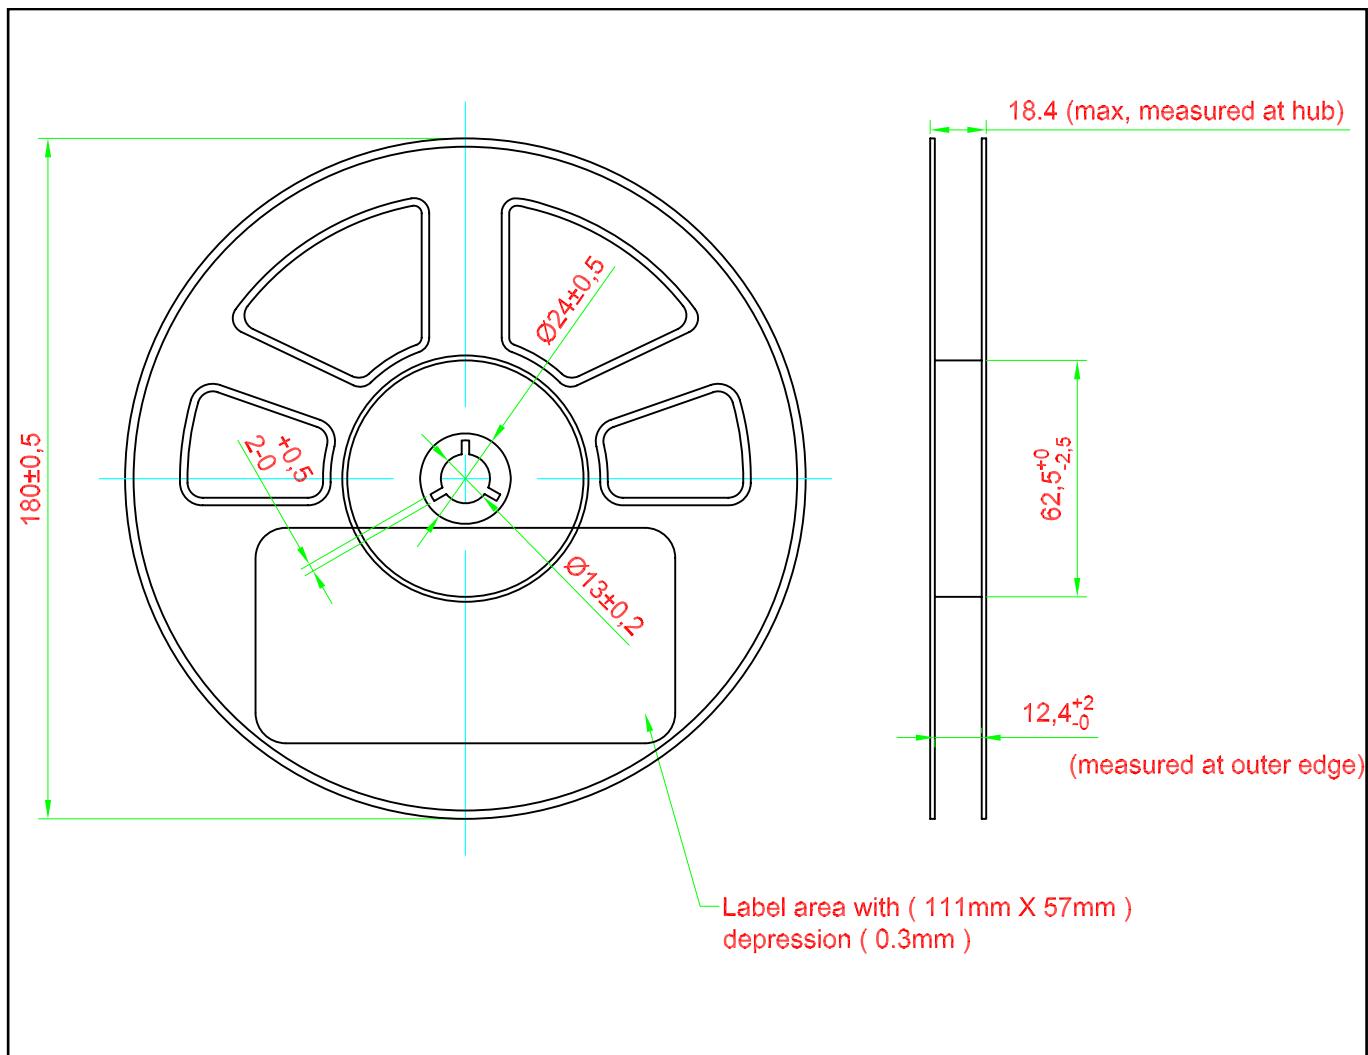

Packaging Specification

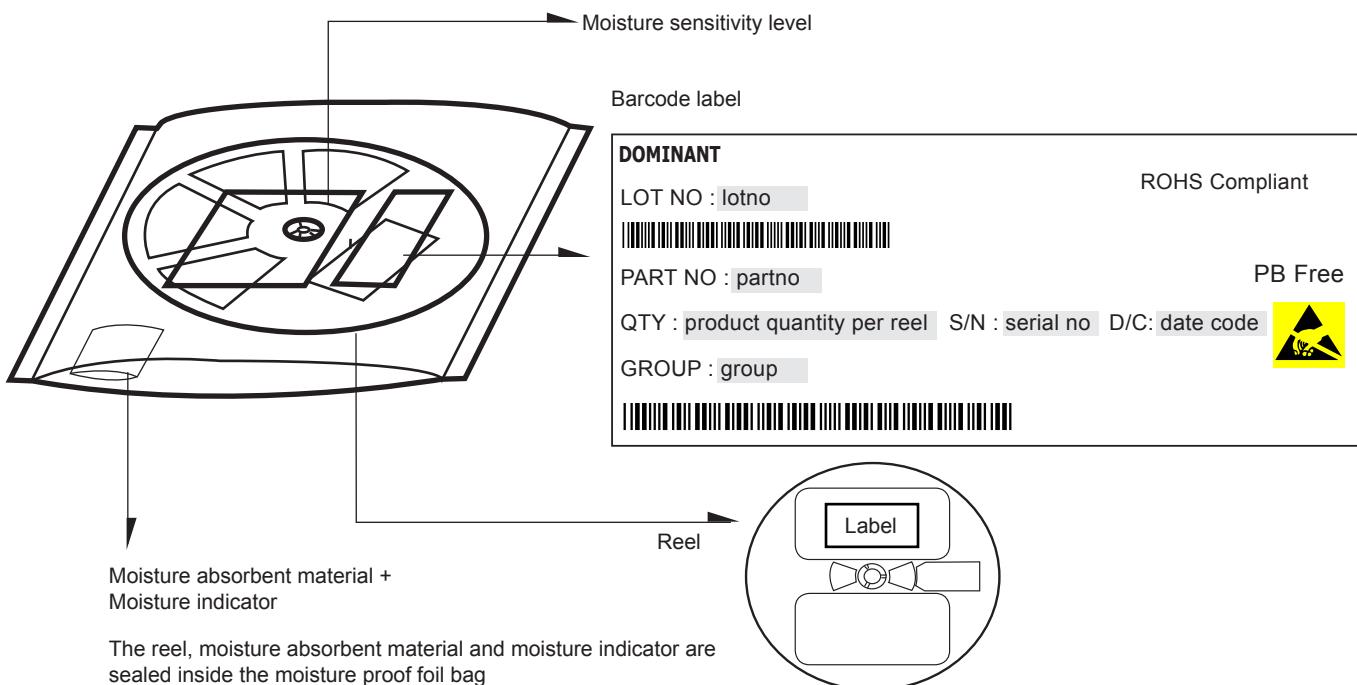


Average 1pc Right Angle DomiLED	1 completed bag (2500pcs)
Weight (gram)	0.034
	190 ± 10

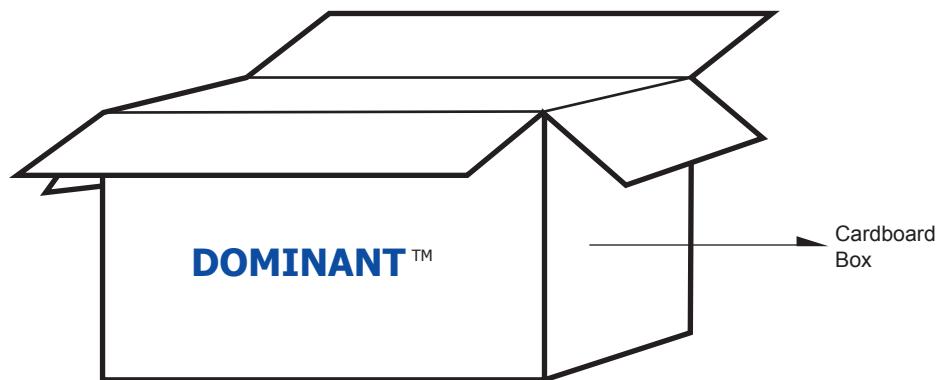

For Right Angle DomiLED™

Cardboard Box Size	Dimensions (mm)	Empty Box Weight (kg)	Reel / Box	Quantity / Box (pcs)
Small	300 x 250 x 250	0.58	15 reels MAX	37,500 MAX
Large	416 x 516 x 476	1.74	96 reels MAX	240,000 MAX

Recommended Pb-free Soldering Profile

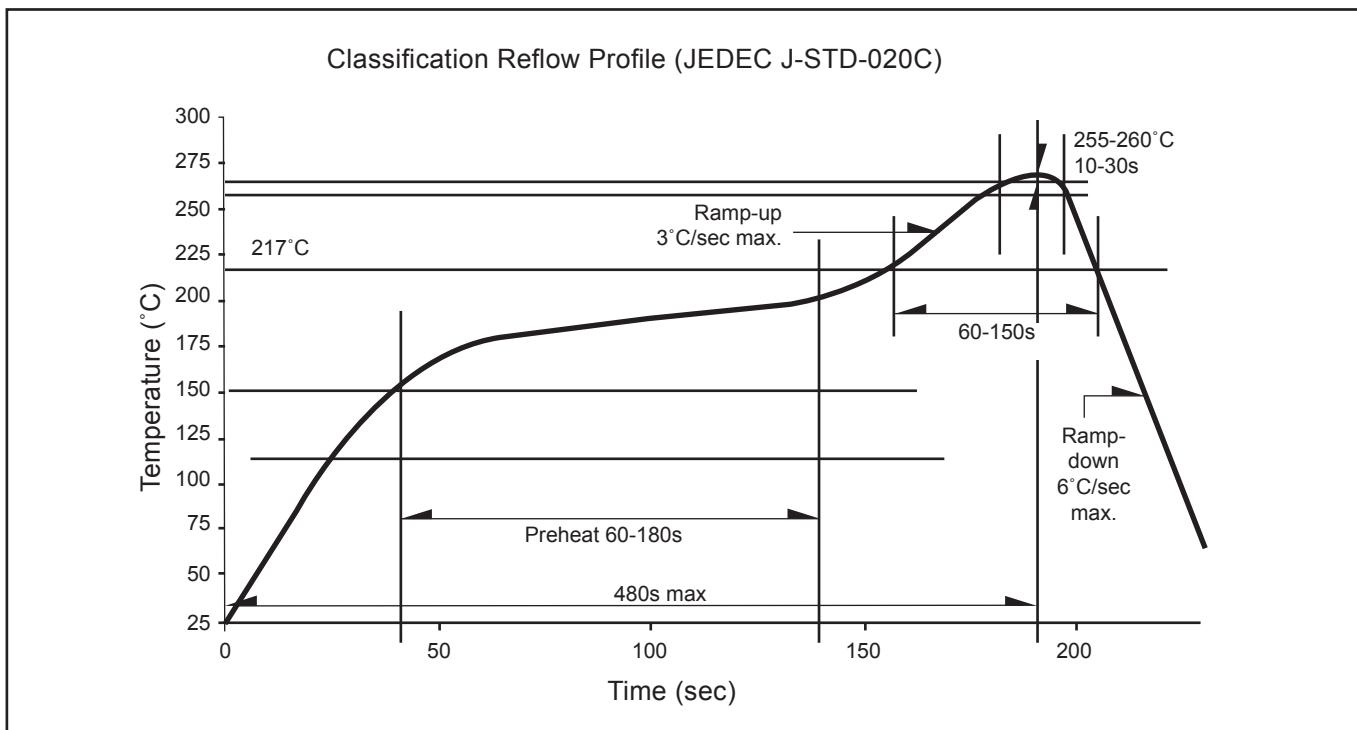

Revision History

Page	Subjects	Date of Modification
-	Initial Release	19 Mar 2012
2	Not for new design: DSW-LSG-V2W-1 Add new partno: DSW-LSG-WX1-1	03 May 2012
7	Update LED polarity orientation	29 May 2012
10	Error in carrier tape	21 Jun 2012
2, 5, 6	Add new partno: DSW-LSG-WX1-JKPL Add Color Bin Structure	18 Apr 2013
2	Update Vf	04 Jul 2013
3	Update Color Bin Structure	28 Oct 2013
7	Add Vf Binning	11 Nov 2014
4	Update Features Not For New Design for Color Bin Structure	14 Apr 2015
8	Add Graph: Chromaticity Vs Forward Current	01 Jun 2015

NOTE

All the information contained in this document is considered to be reliable at the time of publishing. However, DOMINANT Opto Technologies does not assume any liability arising out of the application or use of any product described herein.

DOMINANT Opto Technologies reserves the right to make changes to any products in order to improve reliability, function or design.

DOMINANT Opto Technologies products are not authorized for use as critical components in life support devices or systems without the express written approval from the Managing Director of DOMINANT Opto Technologies.

About Us

DOMINANT Opto Technologies is a dynamic Malaysian Corporation that is among the world's leading SMT LED Manufacturers. An excellence – driven organization, it offers a comprehensive product range for diverse industries and applications. Featuring an internationally certified quality assurance acclaim, DOMINANT's extra bright LEDs are perfectly suited for various lighting applications in the automotive, consumer and communications as well as industrial sectors. With extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing, research and testing capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Opto Technologies can be found on the Internet at <http://www.dominant-semi.com>.

Please contact us for more information:

DOMINANT Opto Technologies Sdn. Bhd
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia.
Tel: +606 283 3566 Fax: +606 283 0566
E-mail: sales@dominant-semi.com

