
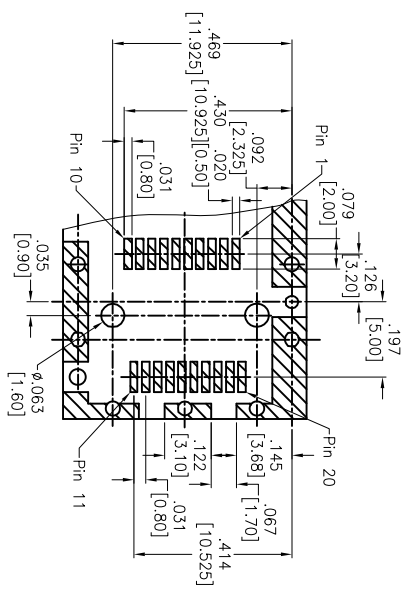
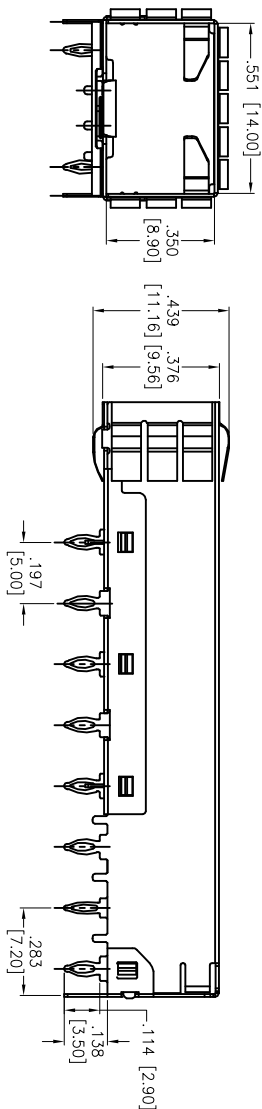
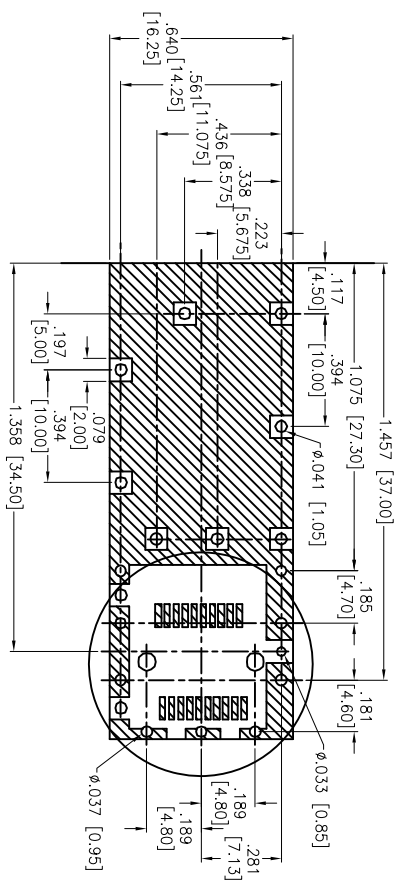


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/15/11	

APPROVED: _____

DATE: _____ TITLE: _____

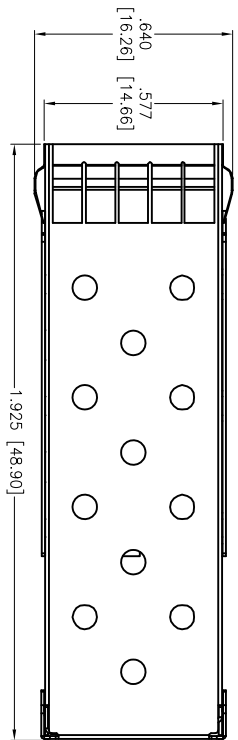

B

B

C

C

D

D

SPECIFICATIONS:

Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Cage: Copper Alloy, Nickel plated

EMI Clip: Copper Alloy

Contact Plating: Gold Flash over Nickel underplate on contact area,

Tin over Copper underplate on tails

Electrical:

Current rating: 1 Amp max

Contact Resistance: 40 mohms max

Insulation resistance: 1,000 Mohms min @ 500 V

Dielectric withstanding voltage: 500 VAC for 1 min

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant.

A

A



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

SMALL FORM FACTOR CAGE, 1PORT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TITLE	
TOLERANCES: EXCEPT AS NOTED	INCHES	SIZE	PART NO.
.X ± .10	HOLES	X	SFC-1-EMI
.XX ± .020	Ø.XX ± .015	REF: S00005C	SCALE: NTS
.XXX ± .015	Ø.XXX ± .010		SHEET 1 OF 1
APPROVALS	DATE		REV.
DRAWN TW	11/15/11		
CHECKED AY	11/15/11		
APPROVED			