

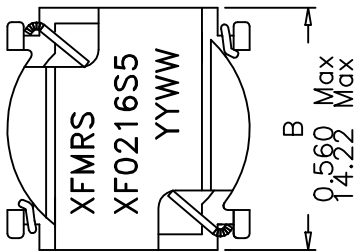
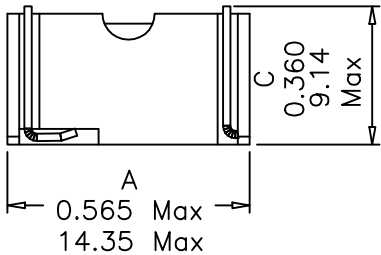


1. Mechanical:

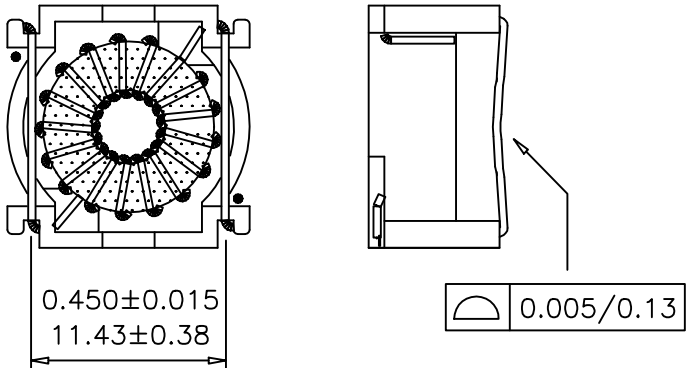

2. Schematic:



3. Electrical Specifications: @25°C

DC Resistance: 0.063 ohms Maximum

OCL: 21.9uH TYPICAL @1.0KHz 1.0V

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

DOC. REV A/1

XFMRS INC		Title: Surface Mount Inductor		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch/mm		P/N: XF0216S5		REV. A
		DWN.	李小锋	JUN-05-01
		CHK.	廖玉坤	JUN-05-01
		APP.	BW	JUN-05-01