

Protection in Portable Electronics Applications.

### FEATURES

- 30 Watts peak pulse power ( $t_p=8/20\mu s$ )
- Transient protection for data lines to IEC 61000-4-2(ESD) 15kV(Air), 8kV(Contact)
- Small package for use in portable electronics.
- Suitable replacement for Multi-Layer Varistors in ESD protection applications.
- Protects one I/O or power line.
- Low clamping voltage.
- Low leakage current.

### APPLICATIONS


- Cell phone handsets and accessories.
- Microprocessor based equipment.
- Personal digital assistants (PDA's)
- Notebooks, desktops, & servers.
- Portable instrumentation.
- Pagers peripherals.

### MAXIMUM RATING (Ta=25)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Peak Pulse Power ( $t_p=8/20\mu s$ )	$P_{PK}$	30	W
Junction Temperature	$T_j$	150	°C
Storage Temperature	$T_{stg}$	-55 ~ 150	°C

### ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage	$V_{RWM}$	-	-	-	5	V
Reverse Breakdown Voltage	$V_{BR}$	$I_f=1mA$	6.1	-	7.2	V
Reverse Leakage Current	$I_R$	$V_{RWM}=3V$	-	-	0.5	$\mu A$
Junction Capacitance	$C_J$	$V_R=0V, f=1MHz$	-	-	15	pF

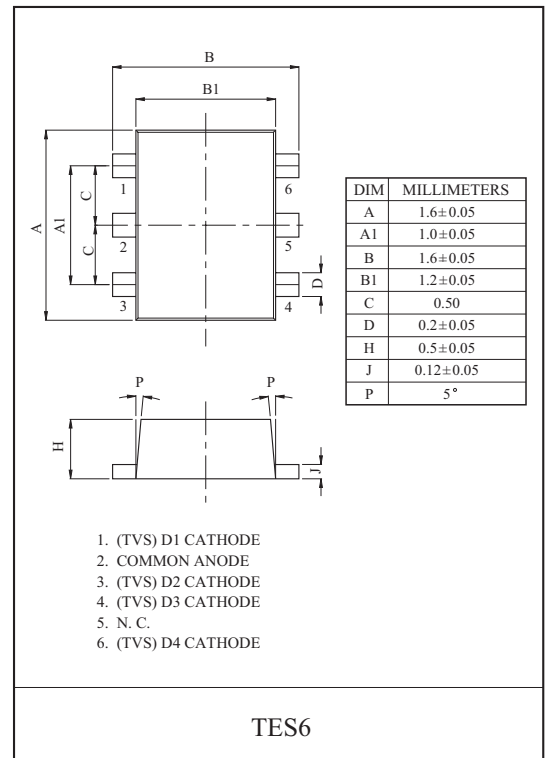


### Marking

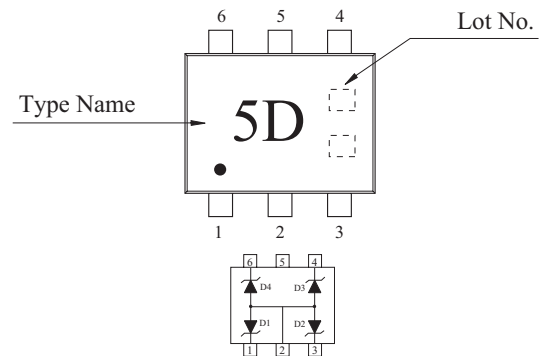


# PG05DXTE6

NON-REPETITIVE PEAK PULSE  
POWER VS. PULSE TIME

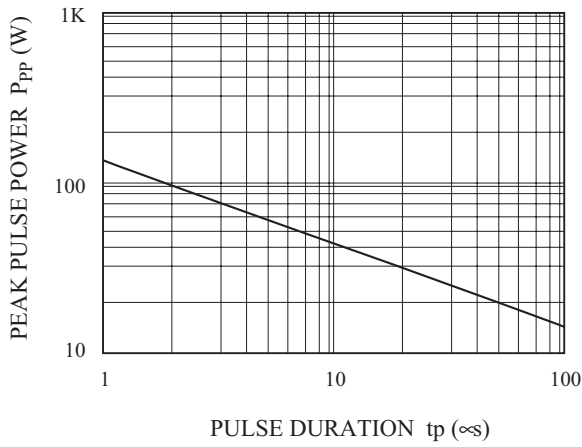

POWER DERATION CURVE

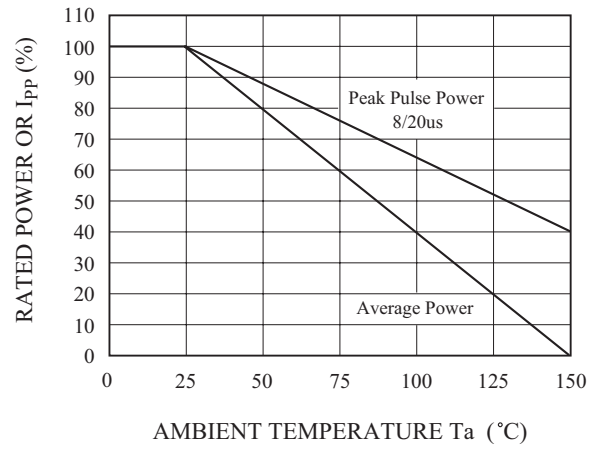

PULSE WAVEFORM

