


SPECIFICATION CONTROL DRAWING

55PC7000

Title WIRE, RADIATION-CROSSLINKED, MODIFIED ETFE-INSULATED, TIN-COATED COPPER, GENERAL PURPOSE, HOOKUP, 600 VOLT	Date 01-28-04	Revision
--	------------------	----------

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

CONDUCTOR – TIN-COATED COPPER
 NOTE: Controlled Free Tin-Coating
 Thickness – 40 micro inches (minimum)

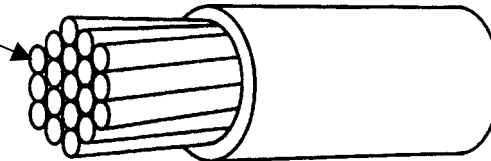

ADDITIONAL REQUIREMENTS

SOLDERABILITY: 95% (minimum) coverage per MIL-STD-202, Method 208 (1 hour steam aging)

Except as specified above, this construction shall meet all the requirements of Raychem Specification Sheet 55PC0111 for AWG sizes 22 through 16.

*Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.
 Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.*

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.



Raychem Wire & Cable
 501 Oakside Avenue
 Redwood City, CA 94063-3800
 Phone: 1-800-227-8816
 Fax: 1-650-361-6297

DIMENSIONS ARE IN INCHES AND, UNLESS OTHERWISE DESIGNATED, ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.