

## DETAILS

|                        |                  |
|------------------------|------------------|
| <b>Product Number</b>  | CA10928_BOOM-M   |
| <b>Family</b>          | Boom             |
| <b>Type</b>            | RefAssy          |
| <b>Color</b>           | metal            |
| <b>Diameter</b>        | 22,2 mm          |
| <b>Height</b>          | 13,74 mm         |
| <b>Style</b>           | hexag            |
| <b>Optic Material</b>  |                  |
| <b>Holder Material</b> |                  |
| <b>Fastening</b>       | tape             |
| <b>Status</b>          | production ready |
| <b>ROHS Compliant</b>  | Yes              |
| <b>Date Updated</b>    | 30/05/2016       |

## OPTICAL PROPERTIES


| LED  | Viewing Angle | Light Beam | Efficiency | cd/lm | Connector |
|------|---------------|------------|------------|-------|-----------|
| MC-E | 36 deg        | Medium     | -          | 2.010 | -         |
| XR-E | 25 deg        | Medium     | -          | -     | -         |



# Ledil Oy CA10928\_Boom-MC-M CA10928\_Boom-MC-M / LDC (Linear)

Luminaire: Ledil Oy CA10928\_Boom-MC-M CA10928\_Boom-MC-M


Lamps: 1 x Cree MC-E (white)

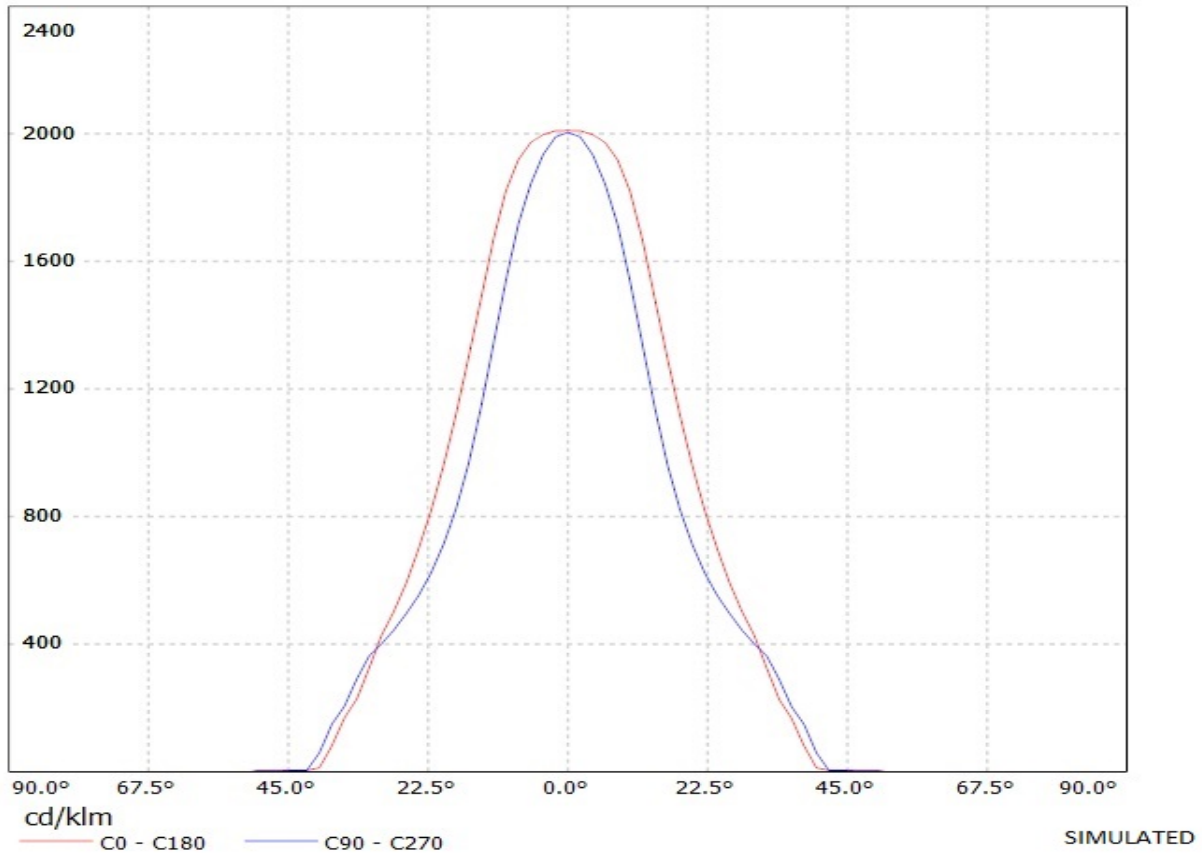

# Ledil Oy CA10928\_Boom-MC-M CA10928\_Boom-MC-M / LDC (Polar)

Luminaire: Ledil Oy CA10928\_Boom-MC-M CA10928\_Boom-MC-M

Lamps: 1 x Cree MC-E (white)

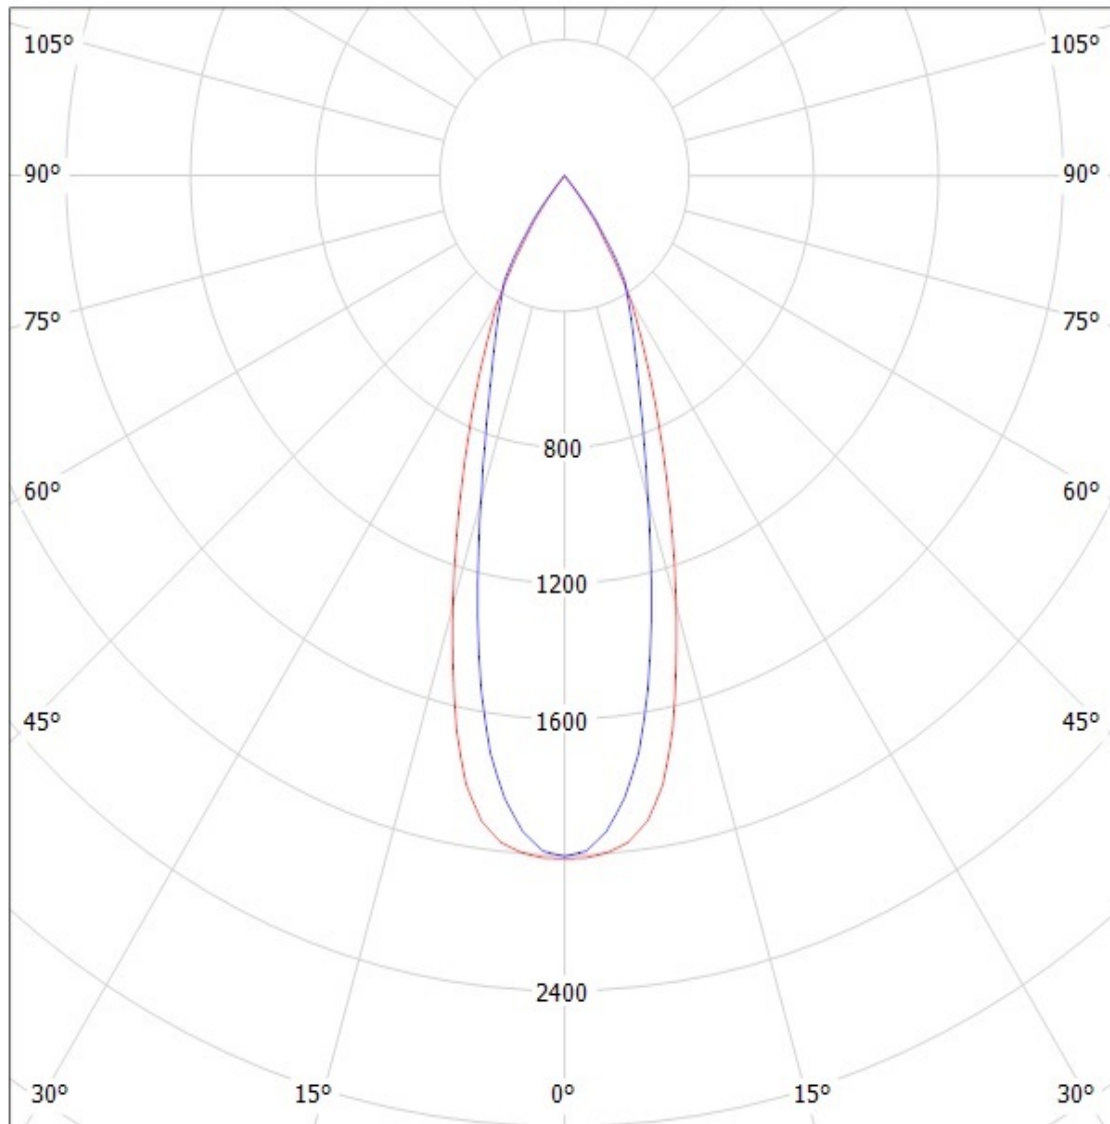

cd/klm

— C0 - C180    — C90 - C270

SIMULATED

**NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.**