

6

5

4

3


2

1

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/1/16	

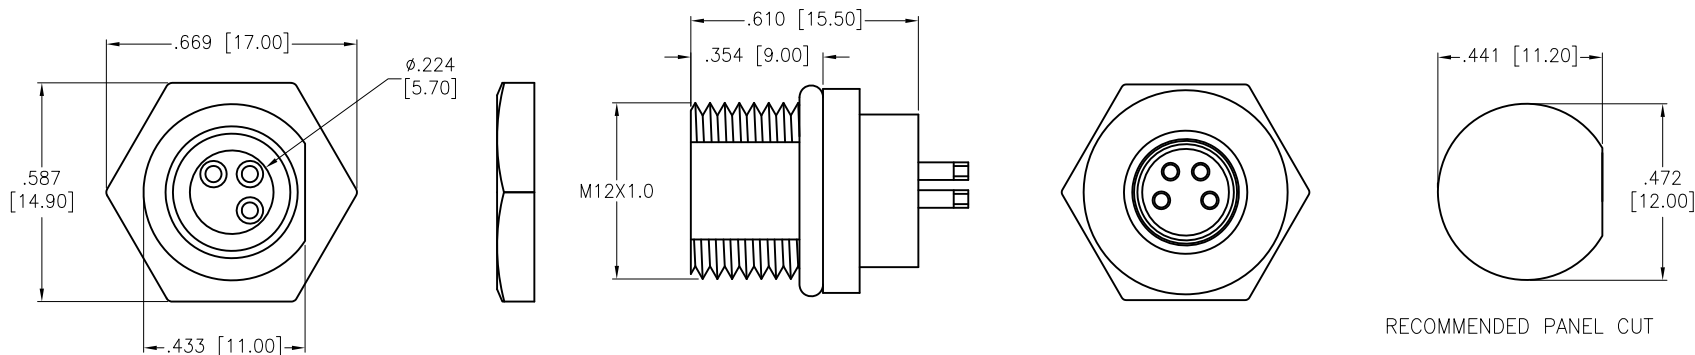

PART NO.	IP RATING
SD-MMEXX-FFTPH-S6000	IP66
SD-MMEXX-FFTPH-S7000	IP67
SD-MMEXX-FFTPH-S8000	IP68

HEX NUT	BRASS, NICKEL PLATED	
O-RING	SILICON	BLACK
PIN CONTACT	BRASS, GOLD FLASH	
PLASTIC INSERT	M8 NP CONNECTOR	BLACK
SOCKET	BRASS, NICKEL PLATED	
PART NAME	DESCRIPTION	COLOR

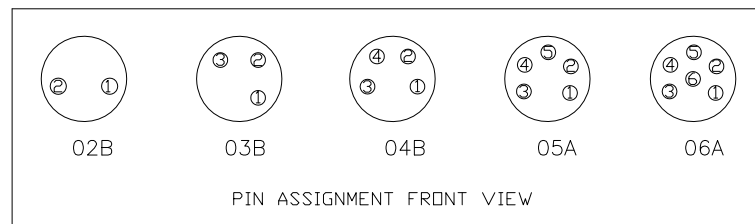

SPECIFICATIONS:

Electrical:

Current rating: XXA=1A, XXB=5A

Dielectric withstanding voltage: 125 VAC for 1 minute (2~4PIN)
60 VAC for 1 minute (5~6PIN)

Temperature Rating:

Operating temperature: -20°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	HR	6/1/16
CHECKED	CK	6/1/16
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WATERPROOF CONNECTOR, FEMALE, M8
SCREW MOUNT, SOLDER TYPE

SIZE X	PART NO. SD-MMEXX-FFTPH-SX000	REV. -
REF: S00200T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1