


ELECTRO-OPTICAL CHARACTERISTICS $T_A=25^\circ\text{C}$ $I_f=20\text{mA}$

PARAMETER	GREEN	YELLOW	UNITS
PEAK COLOR WAVELENGTH	565	585	nm
FORWARD VOLTS (TYP)	2.2	2.3	V_f
LIGHT OUTPUT (TYP)	3.0	3.0	mcd
REVERSE VOLTS @100 μA	5.0	5.0	V_r MIN
LED POSITION	1-9	10	
VIEWING ANGLE (TYP)	80	80	2x theta
EPOXY LENS FINISH	POS 1-10, TINTED, DIFFUSED		

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT (C/Y)	25/30	mA
POWER DISSIPATION PER LED	105	mW
DERATE FROM 25°C	-1.2	mW/°C
OPERATING, STORAGE TEMP.	-40 TO +85	°C
LEAD SOLDERING TEMP.	+260	°C
2.0mm FROM BODY		3 SEC. MAX

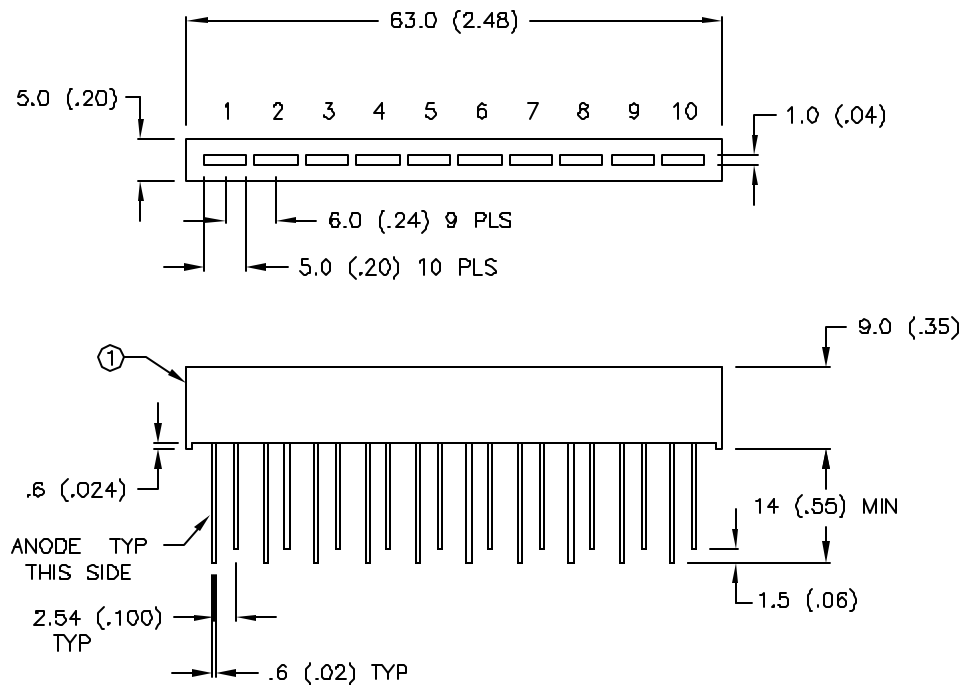

BILL OF MATERIALS:

- SSH-LXB103 HOLDER, BLACK.
- SSL-LX1583GD (9 PCS.)
- SSL-LX1583YD (1 PC.)



292 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
(708) 359-2790

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX OPTO/COMPONENTS, INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX OPTO/COMPONENTS, INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 4-7-95

DWN:

CHK'D:

APPD:

SCALE: DO NOT SCALE DWG

10 LED ARRAY, 1mm x 5mm RECTANGULAR,
9 GREEN 1 YELLOW DIFFUSED

PAGE 1 OF 1

DRAWING NUMBER

SSA-LXB103-G9YD-BB

REV