



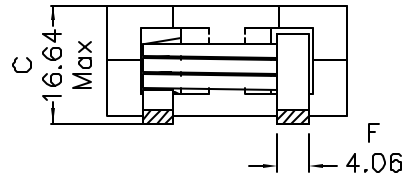


### 1. Mechanical Dimensions:

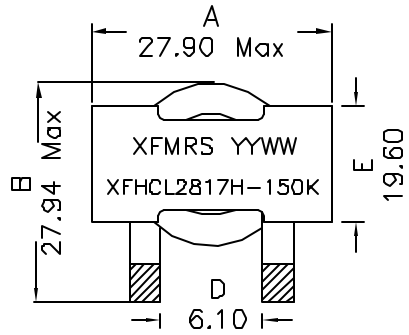

### 2. Schematic:



### 3. Electrical Specifications:

OCL: 15uH±10% @500KHz 0.1V

Q: tbd Min @500KHz, 0.1V

DCR: 2.3mDhms±5%

Isat: 18Adc (Based on 10% Typ Drop in OCL)

Irms: 28A (Based on 40°C Temp Rise)

SRF: 16MHz Typ

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E15155B
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

DOC REV: A/2

**PROPRIETARY** Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

<b>XFMRS Inc</b> www.XFMRS.com		Title: HIGH CURRENT INDUCTOR	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N:XFHCL2817H-150K	REV. A	
	DWN.	Xianyi	Jul-16-09
	CHK.	YK Liao	Jul-16-09
SHEET 1 OF 1	APP.	Joe Huff	Jul-16-09