

**isc N-Channel MOSFET Transistor**

**2SK4014, I2SK4014**

**• FEATURES**

- Low drain-source on-resistance:  
 $R_{DS(on)} \leq 2.0\Omega$ .
- Enhancement mode:  
 $V_{th} = 2.0 \text{ to } 4.0V$  ( $V_{DS} = 10V, I_D = 1.0mA$ )
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

**• DESCRIPTION**



- DC-DC Converter, Relay Drive and Motor Drive Applications

**• ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ C$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{DSS}$	Drain-Source Voltage	900	V
$V_{GS}$	Gate-Source Voltage	$\pm 30$	V
$I_D$	Drain Current-Continuous	6	A
$I_{DM}$	Drain Current-Single Pulsed	18	A
$P_D$	Total Dissipation @ $T_c=25^\circ C$	45	W
$T_j$	Max. Operating Junction Temperature	150	$^\circ C$
$T_{stg}$	Storage Temperature	-55~150	$^\circ C$

**• THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th(ch-c)}$	Channel-to-case thermal resistance	2.78	$^\circ C/W$
$R_{th(ch-a)}$	Channel-to-ambient thermal resistance	62.5	$^\circ C/W$

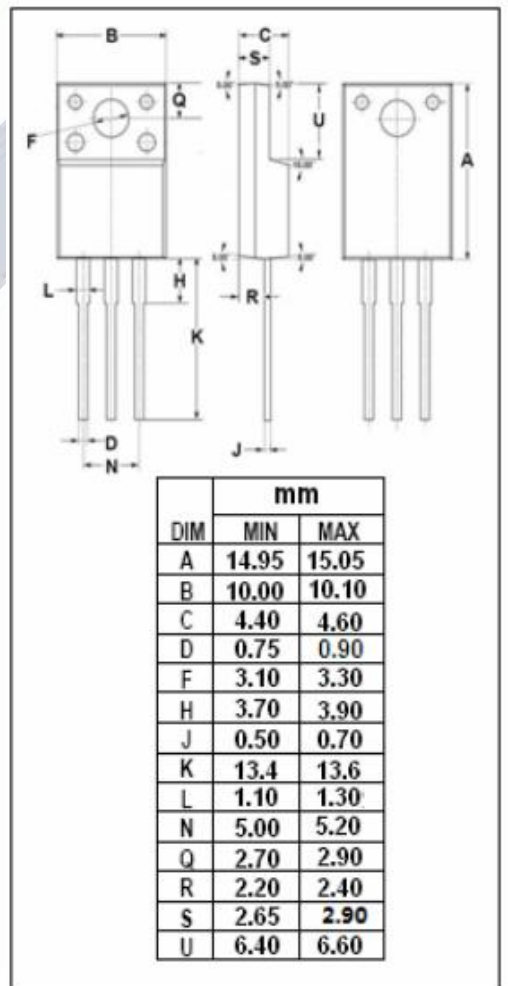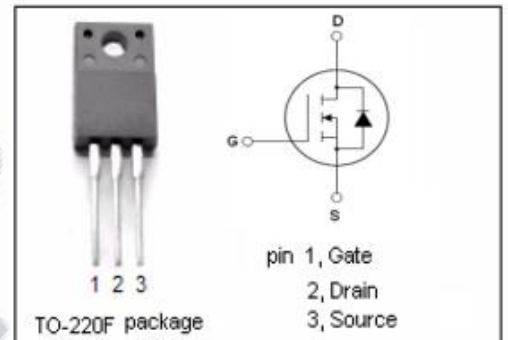

**isc N-Channel MOSFET Transistor**

**2SK4014, I2SK4014**

**ELECTRICAL CHARACTERISTICS**

T<sub>C</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV <sub>DSS</sub>	Drain-Source Breakdown Voltage	V <sub>GS</sub> =0V; I <sub>D</sub> = 10mA	900			V
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> = 10V; I <sub>D</sub> =1.0mA	2.0		4.0	V
R <sub>DS(on)</sub>	Drain-Source On-Resistance	V <sub>GS</sub> =10V; I <sub>D</sub> =3A			2.0	Ω
I <sub>GSS</sub>	Gate-Source Leakage Current	V <sub>GS</sub> = ±30V; V <sub>DS</sub> = 0V			±10	μA
I <sub>DSS</sub>	Drain-Source Leakage Current	V <sub>DS</sub> =720V; V <sub>GS</sub> = 0V			100	μA
V <sub>SDF</sub>	Diode forward voltage	I <sub>DR</sub> =6A, V <sub>GS</sub> = 0 V			1.7	V