

FEATURES

Complimentary to S9015

S9014 (NPN)

MARKING: J6

MAXIMUM RATINGS (TA=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	V _{CBO}	50	V
Collector-Emitter Voltage	V _{CEO}	45	V
Emitter-Base Voltage	V _{EBO}	5	V
Collector Current -Continuous	I _C	0.1	A
Collector Power Dissipation	P _C	0.2	W
Junction Temperature	T _J	150	°C
Storage Temperature	T _{Stg}	-55 to +150	°C



ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V _{CBO}	I _C = 100µA, I _E =0	50			V
Collector-emitter breakdown voltage	V _{CEO}	I _C = 0.1mA, I _B =0	45			V
Emitter-base breakdown voltage	V _{EBO}	I _E =100µA, I _C =0	5			V
Collector cut-off current	I _{CBO}	V _{CB} =50 V , I _E =0			0.1	uA
Collector cut-off current	I _{CEO}	V _{CE} =35V , I _B =0			0.1	uA
Emitter cut-off current	I _{EBO}	V _{EB} = 3V , I _C =0			0.1	uA
DC current gain	h _{FE}	V _{CE} =5V, I _C = 1mA	200		1000	
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =100 mA, I _B = 5mA			0.3	V
Base-emitter saturation voltage	V _{BE(sat)}	I _C =100 mA, I _B = 5mA			1	V
Transition frequency	f _T	V _{CE} =5V, I _C = 10mA f=30MHz	150			MHz

 CLASSIFICATION OF h_{FE}

Rank	L	H
Range	200-450	450-1000

S9014 Typical Characteristics

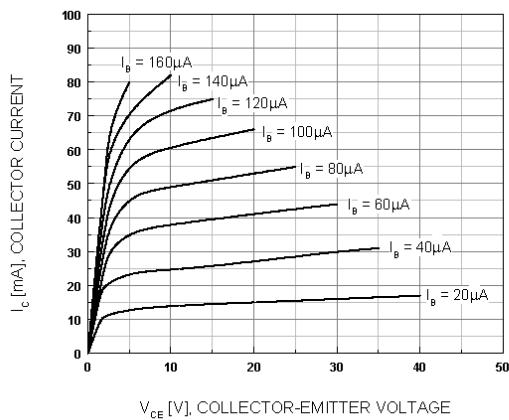


Figure 1. Static Characteristic

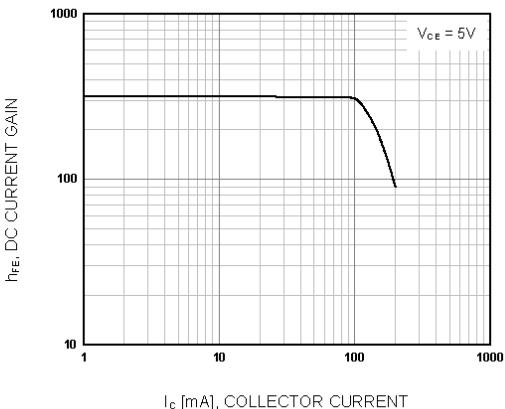


Figure 2. DC current Gain

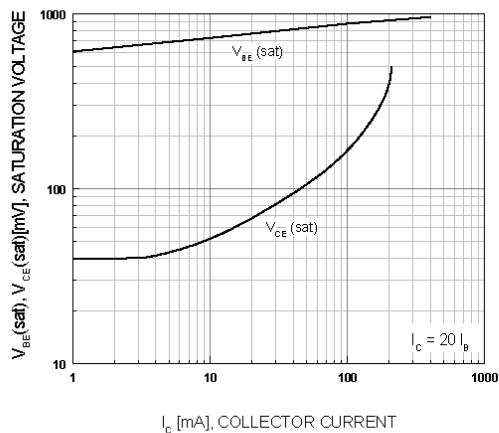


Figure 3. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

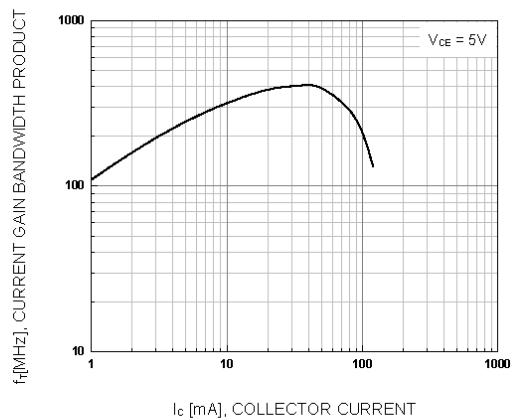


Figure 4. Current Gain Bandwidth Product