



1. Mechanical Dimensions:

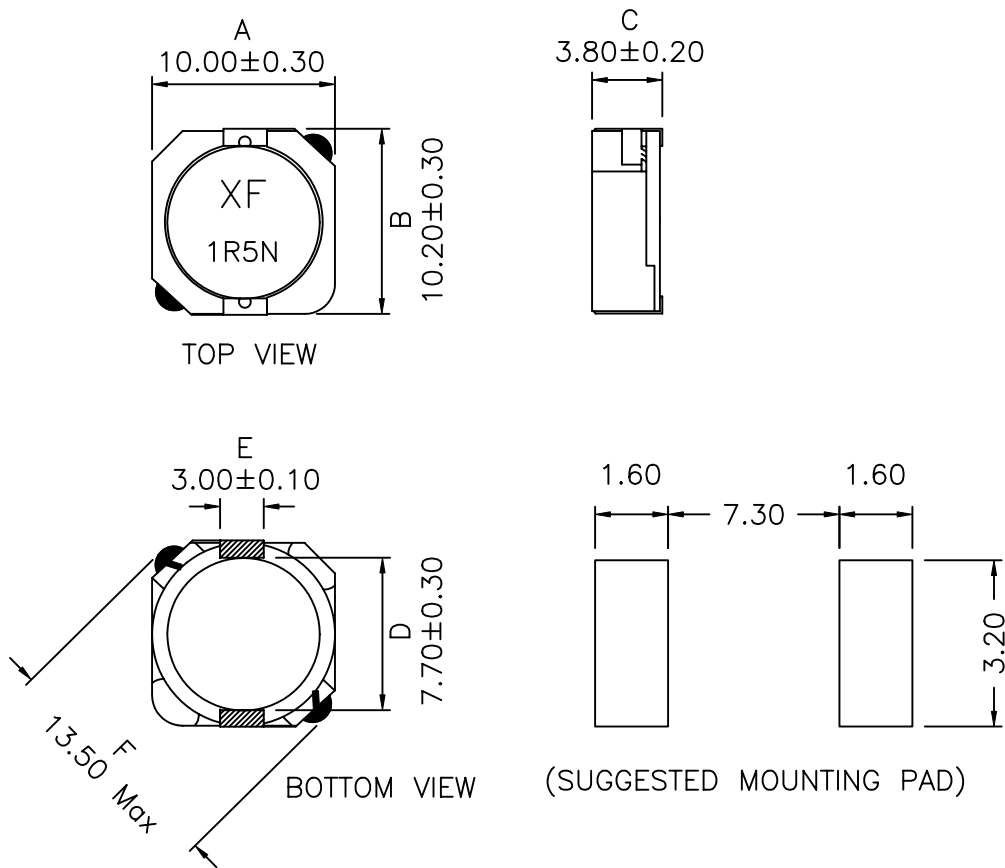

2. Schematic:



3. Electrical Specification:

OCL: $1.5\mu\text{H} \pm 30\%$ @100KHz 0.1V
OCL: 0.975uH Min @100KHz 0.1V, 10.0Adc
DCR: 0.0081 Ohms Max

- Notes:
1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
 2. Flammability: UL94V-0
 3. ASTM oxygen index: > 28%
 4. Insulation System: Class F 155°C. UL file E151556
 5. Operating Temperature Range: -40°C to +85°C
 6. Storage Temperature Range: -55°C to +125°C
 7. Aqueous wash compatible

UNLESS OTHERWISE SPECIFIED TOLERANCES: N/A Dimensions in MM	Title: HIGH CURRENT SELF-LEADED SMT INDUCTORS	
	P/N: XFTPRH104-1R5N	REV. A
	DWN. 李小锋	Jun-27-02
	CHK. 廖玉坤	Jun-27-02
SHEET 1 OF 1		APP. Isaiah M Jun-27-02