
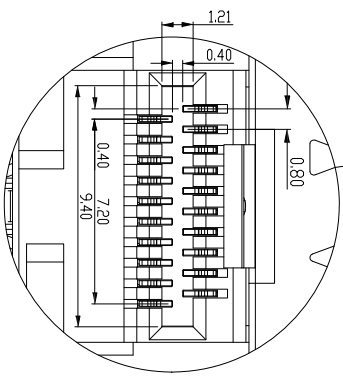
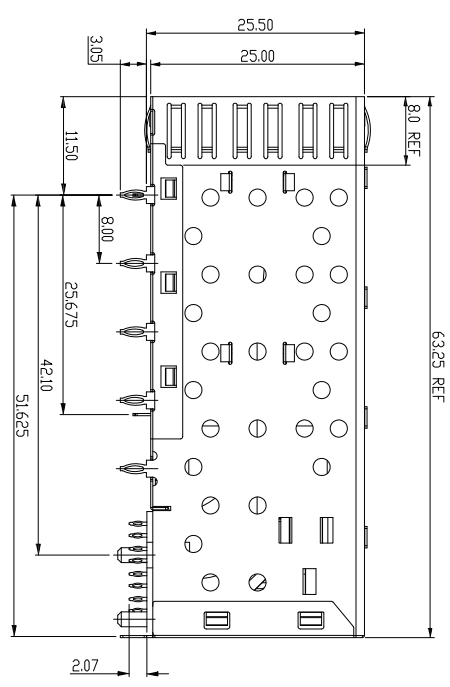


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/30/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

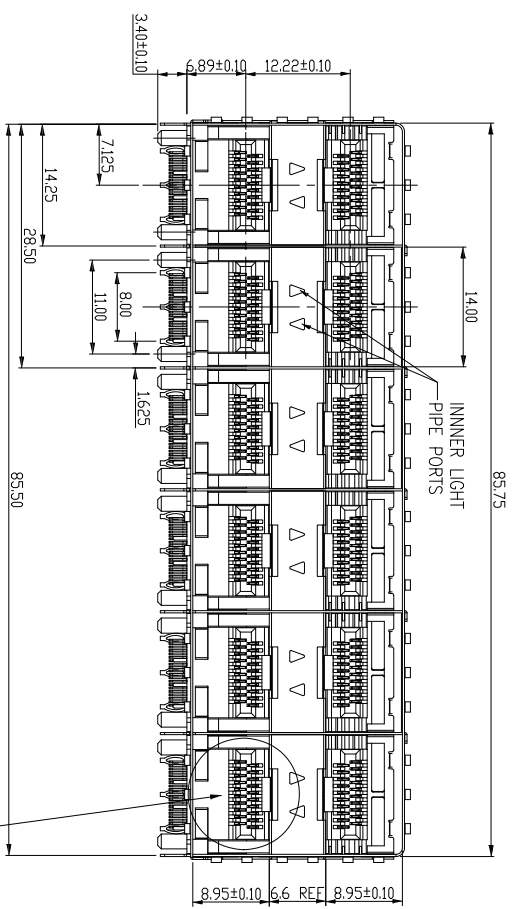

**SPECIFICATIONS:**

- Material: \_\_\_\_\_
- Housing: Hi-temp thermoplastic, glass reinforced, rated UL 94V-0
- Housing color: Black
- Contact: Copper Alloy
- Cage: Copper Alloy
- Plating: \_\_\_\_\_
- 15u" gold over Nickel underplate on contact area.
- Electrical: \_\_\_\_\_
- Contact resistance: 40 milliohms max initial.
- Dielectric withstanding voltage: 300 AC/Min.
- Temperature Rating: \_\_\_\_\_
- Operating temperature: -55°C to +85°C
- Storage temperature: -55°C to +85°C
- Environmental: \_\_\_\_\_

**A**

**B**

**C**

**D**

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **SFP 2X6, W/ INNER LIGHT PIPE PORTS**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN DY	4/30/10
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	SFCJ-12-LP1	-
REF: S0005C	SCALE: NTS	SHEET 1 OF 4

**A**

**B**

**C**

**D**

**6**

**5**

**4**

**3**

**2**

**1**