



1. Mechanical Dimensions:

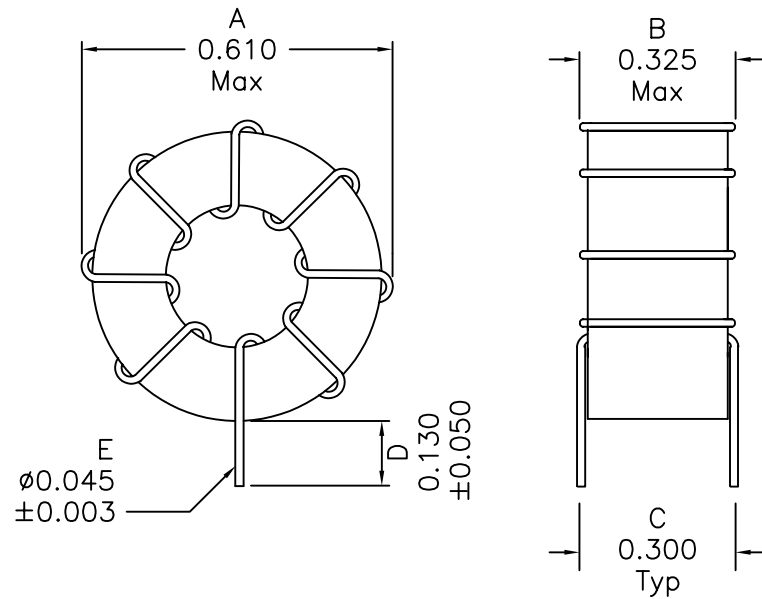

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 3.50uH $\pm 20\%$ @10KHz 0.1V

OCL: 1.81uH Typ @10KHz 0.1V 14.3Adc

Irate: 14.3Adc (Based on 40°C Temp Rise)

DC Resistance: 0.005 Ohms Max

Notes:

- Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151556
- Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible
- Electrical and mechanical specifications 100% tested
- RoHS Compliant Component

Doc Rev: A/1

XFMRs Inc www.XFMRS.com		Title: TOROIDAL INDUCTOR	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ± 0.10 Dimensions in INCH	P/N: XF0357-V01	REV. A	
	DWN.	Juan Mao	Mar-24-10
SHEET 1 OF 1	CHK.	YK Liao	Mar-24-10
	APP.	BW	Mar-24-10