


UNCONTROLLED DOCUMENT

29F0328-0T0-10



PHYSICAL DIMENSIONS:


A	8.34 [.328]	+ 0.12 [.005]
B	10.88 [.428]	+ 0.15 [.006]
C	10.57 [.416]	+ 0.20 [.008]
D	7.62 [.300]	+ 0.13 [.005]
E	2.54 [.100]	+ 0.05 [.002]
G	3.18 [.125]	+ 0.38 [.015]
H	11.43 [.450]	+ MAX

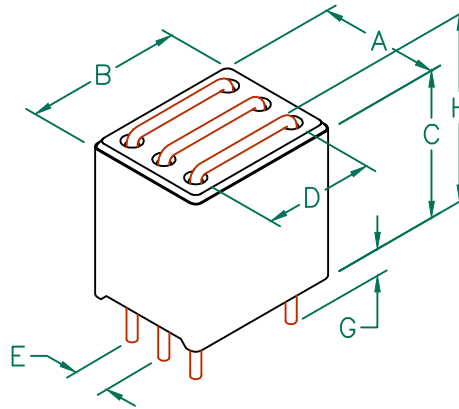


ELECTRICAL CHARACTERISTICS:			
Z @ 100MHz (Ω)	DCR (Ω)	Rated Current	
Nominal	342		
Minimum	257		
Maximum	427	0.01	10,000 mA

1. BULK PACKED 910 per CASE.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. TERMINATION FINISH IS 100% TIN.
4. OPERATION TEMPERATURE (INCLUDING SELF-HEATING): -40 ~ +125°C.

HOLE PATTERN FOR THRU-HOLE INSERTION

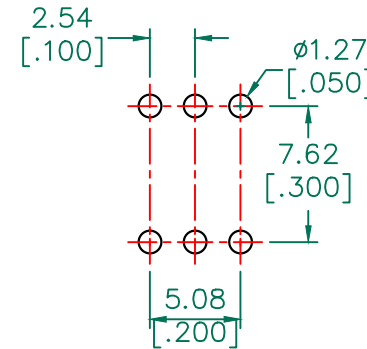

|Z| , R, AND X vs. FREQUENCY

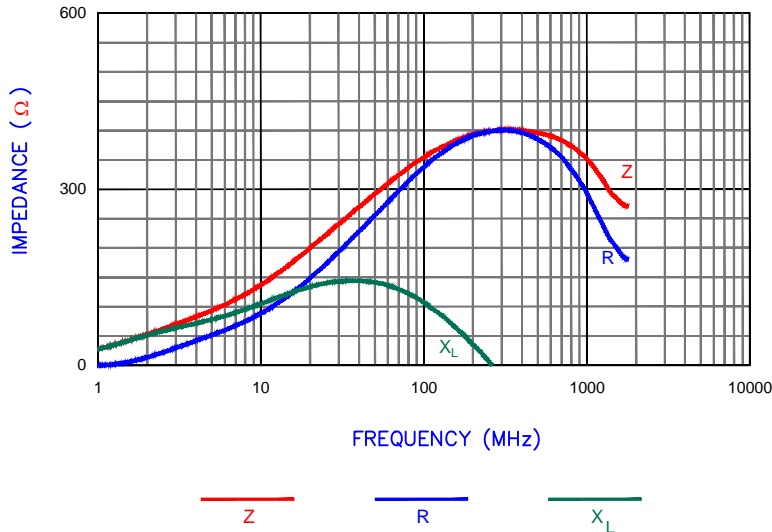

DIMENSIONS ARE IN mm [INCHES]				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
D	ADD NOTE 4	08/30/12	QIU	PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
C	ADD ROHS SYMB. UPDATE LOGO	10/20/08	JRK	29F0328-0T0-10	D	CNZ ASSEMBLY	TMB
B	UPDATE COMPANY LOGO	04/24/07	JRK	DATE: 04/30/04	SCALE:	NTS	SHEET:
A	ORIGINAL DRAFT	04/30/04	JRK	CAD #	TOOL #	1 of 2	
REV	DESCRIPTION	DATE	INT	29F0328-0T0-10-D-1	H0328		