

■ Features

- Low power loss, high efficiency.
- High current capability, low forward voltage drop.
- High surge capability.
- Guardring for overvoltage protection.
- Ultra high-speed switching.
- Silicon epitaxial planar chip, metal silicon junction.
- Suffix "H" indicates Halogen-free part, ex.MBR1040FCTH. Lead-free parts meet environmental standards of MIL-STD-19500 /228

■ Mechanical data

- Epoxy : UL94-V0 rated flame retardant.
- Case : ITO-220AB molded plastic body over passivated chip.
- Lead : Axial leads, solderable per MIL-STD-202, Method 208 guaranteed.
- Polarity: Color band denotes cathode end.
- Mounting Position : Any.
- Weight : Approximated 2.25 gram.

■ Maximum ratings and electrical characteristics


Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current	See Fig.1	I_o			10	A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I_{FSM}			125	A
Reverse current	$V_R = V_{RRM} T_A = 25^\circ C$	I_R	0.1	10	mA	
	$V_R = V_{RRM} T_A = 125^\circ C$					
Diode junction capacitance	f=1MHz and applied 4V DC reverse voltage	C_J		150		pF
Thermal resistance	Junction to ambient	$R_{\theta JA}$		30		°C/W
Storage temperature		T_{STG}	-55		+175	°C

Symbol	Marking code	Max. repetitive peak reverse voltage V_{RRM} (V)	Max. RMS voltage V_{RMS} (V)	Max. DC blocking voltage V_R (V)	Max. forward voltage @5A, $T_A = 25^\circ C$ V_F (V)	Max. forward voltage @5A, $T_A = 125^\circ C$ V_F (V)	Operating temperature T_J (°C)
MBR1040FCT	MBR1040FCT	40	28	40	0.70	0.57	-55 ~ +150
MBR1045FCT	MBR1045FCT	45	31.5	45			
MBR1060FCT	MBR1060FCT	60	42	60			
MBR1065FCT	MBR1065FCT	65	45.5	65			
MBR10100FCT	MBR10100FCT	100	70	100			
MBR10150FCT	MBR10150FCT	150	105	150			
MBR10200FCT	MBR10200FCT	200	140	200			

■ Outline

ITO-220AB

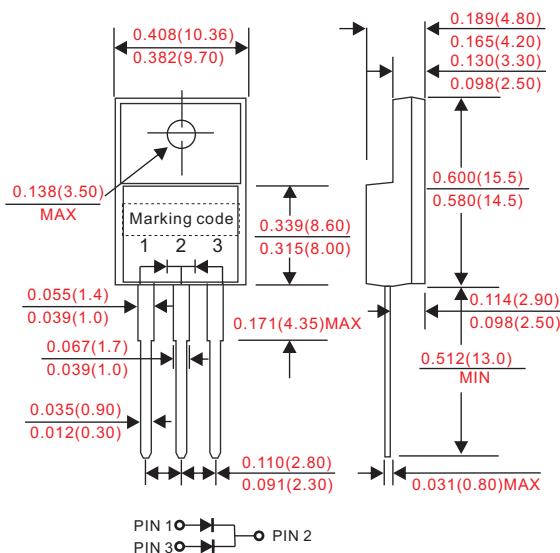

Dimensions in inches and (millimeters)

■ Rating and characteristic curves

Fig.1 - Forward Current Derating Curve

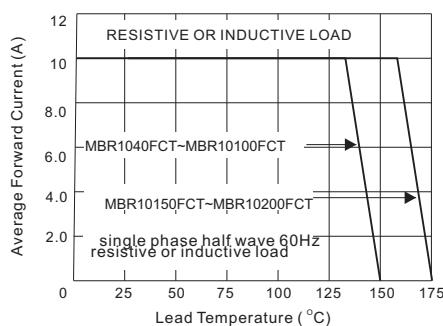


Fig. 3.1 - Instantaneous Forward Characteristics

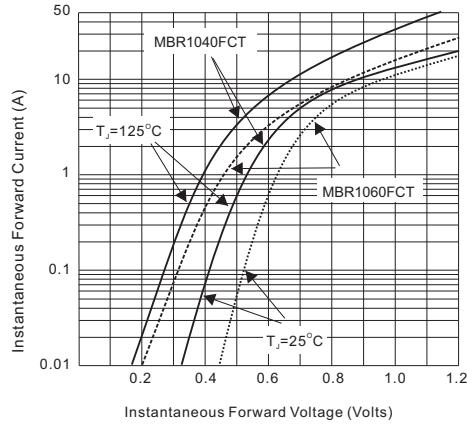


Fig. 3.3 - Instantaneous Forward Characteristics

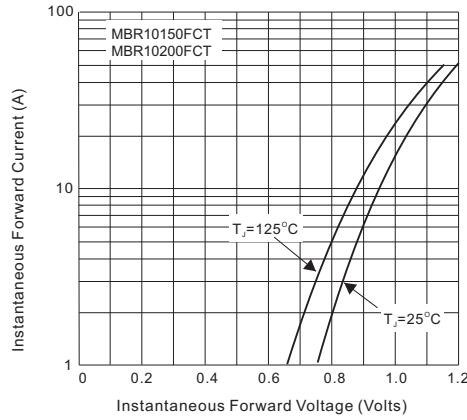


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

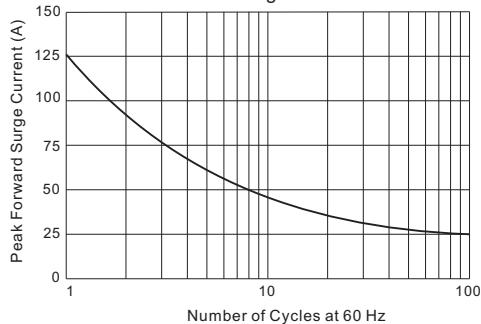


Fig. 3.2 - Instantaneous Forward Characteristics


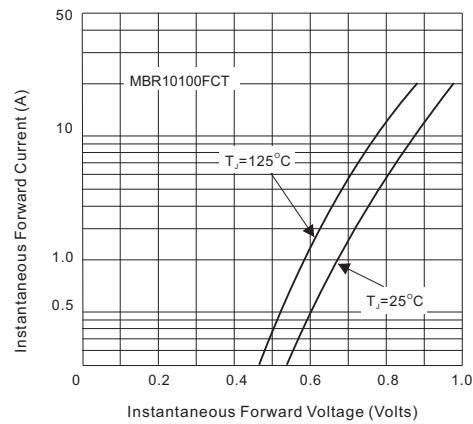


Fig. 4 - Reverse Characteristics

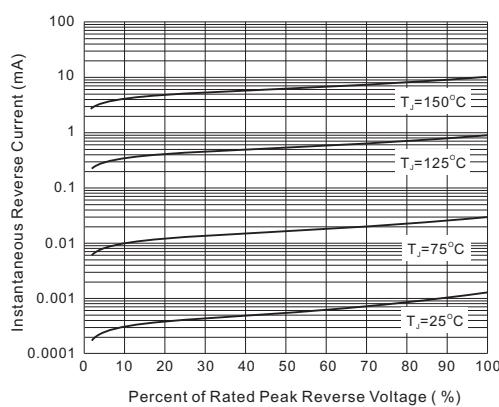

PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
TO-220AB	50/tube;1000/BOX	5000	58X23.5X18	15.00	13.00