



TAYCHIPST

SURFACE MOUNT HIGH EFFICIENCY RECTIFIERS

UF3A THRU UF3M

50V-1000V 3.0A



FEATURES

- For surface mounted applications
- Low profile package
- Built-in strain relief
- Easy pick and place
- Ultrafast recovery times for high efficiency
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- Glass passivated junction
- Pb free product are available : 99% Sn can meet Rohs environment substance directive request

MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic
 Terminals: Solder plated, solderable per MIL-STD-202G, Method 2026
 Polarity: Indicated by cathode band
 Standard packaging: 16mm tape (EIA-481)
 Weight: 0.007 ounce, 0.21 gram

DO-214AB(SMC)

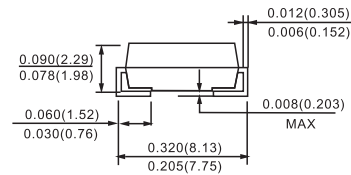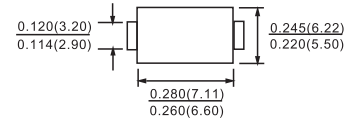

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.


PARAMETER	SYMBOL	UF3A	UF3B	UF3D	UF3G	UF3J	UF3K	UF3M	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current .375" (9.5mm) lead length at TL=75°C	I _{AV}	3.0							A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I _{FSM}	100							A
Maximum Forward Voltage at 3.0A	V _F	1.0		1.4		1.7		V	
Maximum DC Reverse Current at TA=25°C Rated DC Blocking Voltage TA=100°C	I _R				10.0 300			uA	
Typical Junction capacitance (Note 2)	C _J	75				63		pF	
Typical Thermal Resistance(Note 3)	R _{θJL}	15							°C / W
Maximum Reverse Recovery Time (Note 1)	T _{RR}	50				100		ns	
Operating Junction and Storage Temperature Range	T _J ,T _{STG}	-50 TO +150							°C

- NOTES:1. Reverse Recovery Test Conditions: I_F=0.5A, I_R=1.0A, I_{rr}=0.25A
 2. Measured at 1 MHz and applied V_r = 4.0 volts.
 3. 8.0 mm² (.013mm thick) land areas.



AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

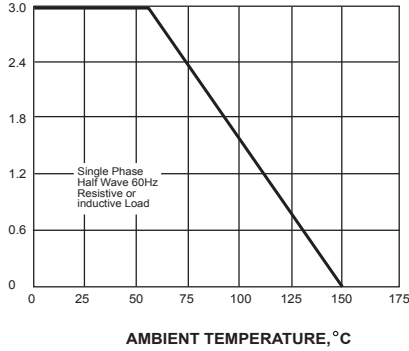

PEAK FORWARD SURGE CURRENT, AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


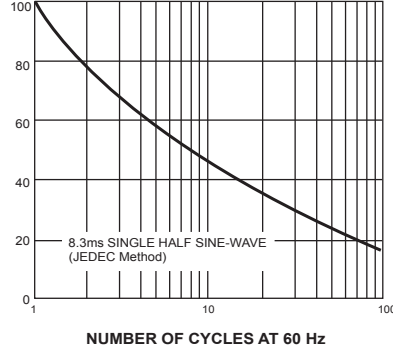


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

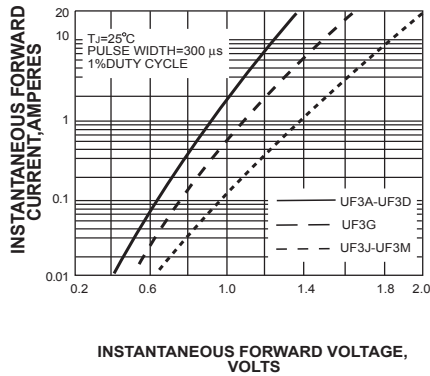

INSTANTANEOUS REVERSE CURRENT, MICROAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS


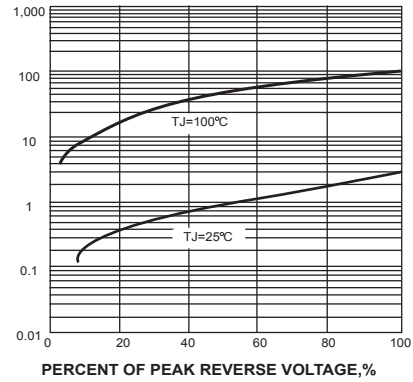


FIG. 5-TYPICAL JUNCTION CAPACITANCE



TRANSIENT THERMAL IMPEDANCE, °C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

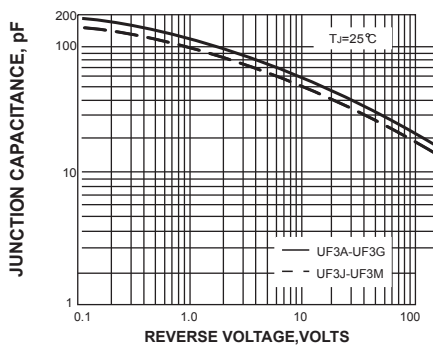