
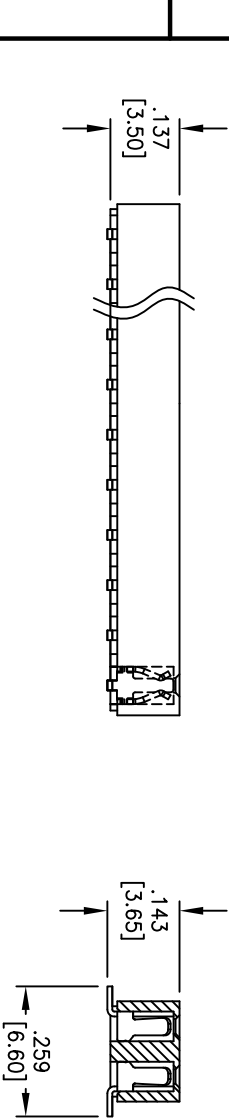
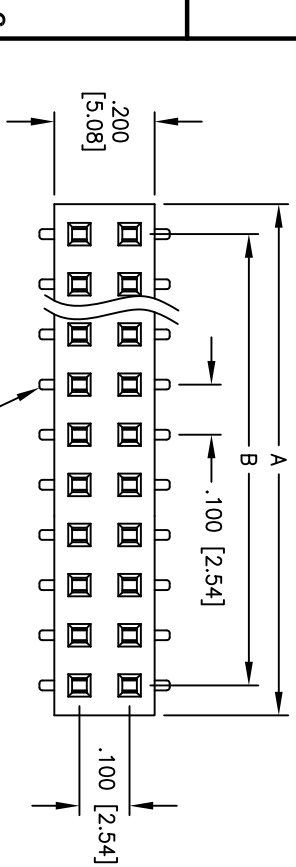
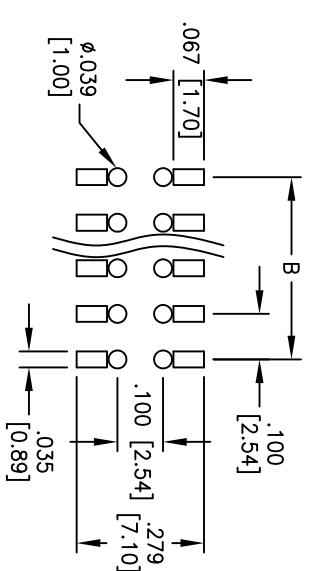


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/23/10	

APPROVED: _____
DATE: _____ TITLE: _____

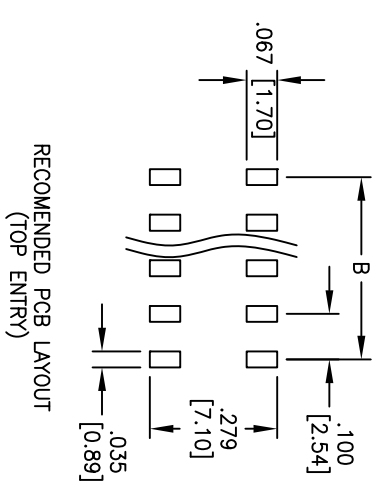

SPECIFICATIONS:

Material: Nylon 6T, Glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating: Gold flash over Nickel underplate on contact area, Tin over Copper underplate on tails.

Electrical:
Operating voltage: 250 VAC max.
Current rating: 3 Amps max.
Contact resistance: 20 mohms max. initial
Insulation resistance: 5,000 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating: Operating temperature: -40°C to +105°C

Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 260°C for 5 sec.



PACKAGED ON TAPE & REEL

A = .100 [2.54] X No. of Positions/row + .019 [0.50]
B = .100 [2.54] X No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES	
.X ± .10 .XX ± .020 .XXX ± .015	ØX ± .10 ØXX ± .015 ØXXX ± .010
APPROVALS	DATE
DRAWN AY	7/23/10
CHECKED AH	7/23/10
APPROVED	

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE RECEPTACLE STRIP, VERY LOW PROFILE, DUAL ROW, SURFACE MOUNT	
SIZE X	PART NO. RSVL-2A-XX-SG-SMT-TR
REF: S00032T	SCALE: NTS
SHEET 1 OF 1	REV. -