

# 42-DL232

---

**Version** : A.002  
**Issue Date** : 2009/07/14  
**File Name** : SP-DL232-A.002.doc  
**Total Pages** : 6

## *Optical Fiber Transmitting IC*



新竹市科學園區展業一路9號7樓之1  
SILICON TOUCH TECHNOLOGY INC.  
9-7F-1, Prosperity Road I, Science Based Industrial Park,  
Hsin-Chu, Taiwan 300, R.O.C.  
Tel : 886-3-5645656 Fax : 886-3-5645626

## 42-DL232

# OPTICAL FIBER TRANSMITTING IC


### GENERAL DESCRIPTION

42-DL232 is a driver IC designed for the application of high-speed optical fiber transmission. It integrates the LED driver with constant current output to reduce the complexity and the cost of the transmission module. 42-DL232 can transmit with the speed up to 50Mb/s. 42-DL232 are fabricated by using CMOS technology with low power consumption purpose.

### FEATURES

1. TTL interface compatible
2. High speed (up to 50Mb/s)
3. Uniform output waveform
4. Constant current output
5. Low power consumption

### BLOCK DIAGRAM And APPLICATION CIRCUIT

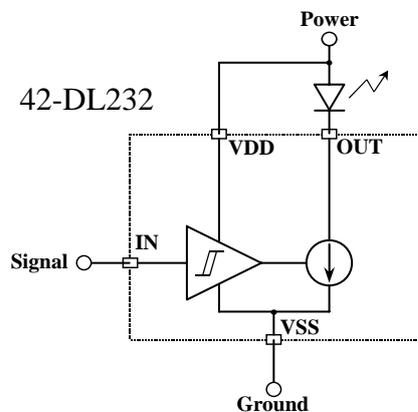

### ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Rating	Unit
Supply Voltage	$V_{DD}$	-0.5 to +6.5	V
Input Voltage	$V_{IN}$	-0.5 to $V_{DD} + 0.5$	V
Operating Temperature	$T_{opr}$	-40 to +85	°C
Storage Temperature	$T_{stg}$	-55 to +100	°C
Electrostatic Damage (HBM)	ESD	4	KV
Output Voltage	$V_{OUT}$	-0.5 to $V_{DD} + 0.5$	V

### RECOMMENDED OPERATING CONDITIONS

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	$V_{DD}$	2.7	-	5.5	V
High Level Input Voltage	$V_{IH}$	2	-	$V_{DD}$	V
Low Level Input Voltage	$V_{IL}$	0	-	0.8	V


### ELECTRICAL CHARACTERISTICS ( $V_{DD}=5.0V$ , $T_A=25^{\circ}C$ , if not mentioned )

ITEM	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
High Level Input Voltage	$V_{IH}$	-	2	-	$V_{DD}$	
Low Level Input Voltage	$V_{IL}$	-	0	-	0.8	V
Input Leakage Current	$I_{IN}$	$V_{IN}=V_{DD}$ or $V_{SS}$	-	-	10	uA
Quiescent Supply Current	$I_{DDQ}$	$V_{IN} = V_{DD}$ or $V_{SS}$	-	4	-	mA
Output Sinking Current	$I_{OUT\_ON}$	$V_{IN}=V_{DD}$ $C_{LED}=15pF$ , $V_{FLED}=1.6V$	2.4	3	3.6	mA
Propagation Delay	$T_{PLH}$ , $T_{PHL}$	$V_{DD}=3V$ , $C_{LED}=15pF$ , $V_{FLED}=2.0V$	-	-	20	ns
Rise Time, Fall Time of $I_{OUT}$	$T_r$ , $T_f$	$V_{DD}=3V$ , $C_{LED}=15pF$ , $V_{FLED}=2.0V$	-	5	-	ns
Pulse Width Distortion	$\Delta tw$	$C_{LED}=15pF$ , $V_{FLED}=2.0V$	- 2	0	2	ns
Jitter of Output Current	$\Delta tj$	$C_{LED}=15pF$ , $V_{FLED}=2.0V$	-	1	-	ns
Data Rate	$F_{DATA}$	NRZ Code, $C_{LED}=15pF$ , $V_{FLED}=2.0V$	-	-	50	Mb/s

**PAD DESCRIPTIONS**

PAD NO.	PAD NAME	DESCRIPTIONS
1	IN	Input Pad(High Active)
2	VDD	Supply Voltage
3	OUT	Output Pad Sinking Current(Active Low)
4	VSS	Ground

**DIE CONFIGURATION**

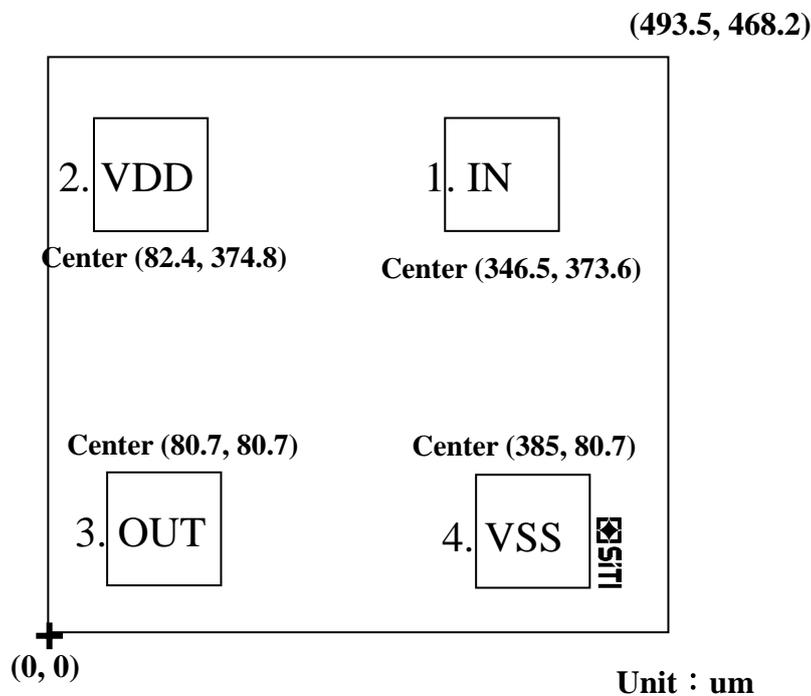

Die Size: 493.5um \* 468.2um

Die Thickness: 12mil(≒ 305um)

Pad Size: 100um \* 100um

**\* Note:** SiTI reserves the right to improve the device geometry and manufacturing processes without prior notice. Though these improvements may result in slight geometry changes, they will not affect die electrical characteristics and pad layouts.

## REQUIREMENTS FOR WAFER DELIVERY

- Material : Silicon with P-Substrate
- Diameter : 6 inches( $\approx$  15cm)
- Thickness : 12 mils( $\approx$  305um)
- Malfunctioned die : Marked with red ink or equivalent marking

## HANDLING RECOMMENDATION FOR STATIC ELECTRICITY PROTECTION

- (1) Avoid any circumstance that produce static electricity, e.g. rubbing against plastic, during moving, storing and processing 42-DL232.
- (2) Process 42-DL232 in a clean room with proper temperature and humidity.
- (3) Ground all working machines and workers wear anti-electrostatic ring to ground during processing.
- (4) Avoid contact 42-DL232 with bare hands .If unavioded, wear anti-electrostatic ring and use anti-electrostatic tool to pick it up.

## GUARANTED TEMPERATURE AND RETENTION CYCLE

- (1) The device/wafer 42-DL232 should be stored in the nitrogenous chest. The conditions suggested are as follows:
  - Temperature =  $23\pm 3^{\circ}\text{C}$
  - Relative Humidity =  $50\pm 10\%$
  - Minimum nitrogen inflow = 3 liters/minute
- (2) If the device/wafer, 42-DL232 is incidentally exposed to the air, use it for manufacturing as soon as possible.
- (3) Under the storage environment specified in item (1), six-month safe storage period is guaranteed.

The products listed herein are designed for ordinary electronic applications, such as electrical appliances, audio-visual equipment, communications devices and so on. Hence, it is advisable that the devices should not be used in medical instruments, surgical implants, aerospace machinery, nuclear power control systems, disaster/crime-prevention equipment and the like. Misusing those products may directly or indirectly endanger human life, or cause injury and property loss.

Silicon Touch Technology, Inc. will not take any responsibilities regarding the misuse of the products mentioned above. Anyone who purchases any products described herein with the above-mentioned intention or with such misused applications should accept full responsibility and indemnify. Silicon Touch Technology, Inc. and its distributors and all their officers and employees shall defend jointly and severally against any and all claims and litigation and all damages, cost and expenses associated with such intention and manipulation.

Silicon Touch Technology, Inc. reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.