


Band Stop Filter

BSP-255310+

50Ω 255 to 310 MHz

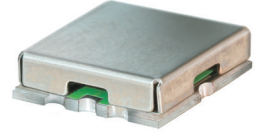

CASE STYLE: GP731

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W Max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

INPUT	2
OUTPUT	6
GROUND	1, 3, 4, 5, 7, 8

Features

- high rejection
- small size (0.35" x 0.35")
- shielded case
- aqueous washable

Applications


- military communications
- receivers / transmitters
- harmonic rejection

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Band Stop Filter Electrical Specifications

STOPBANDS (MHz)		Loss 3dB	PASSBANDS (MHz)		VSWR (:1)	
(Loss > 20dB)	(Loss > 35dB)	Typ.	Loss < 1dB	Loss < 1.5dB	Stopband	Passband
F6 - F7	F8 - F9	F4, F5	F1	F2 - F3	Typ.	Typ.
255 - 310	262 - 295	230 & 345	180	400 - 1000	12	1.6


Outline Drawing

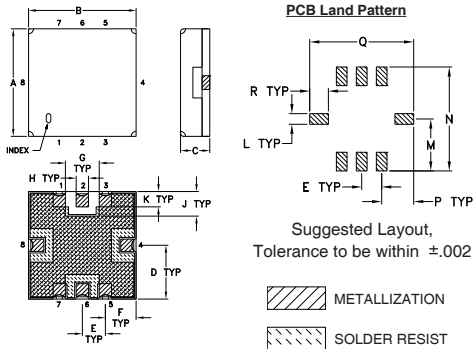

Typical Frequency Response

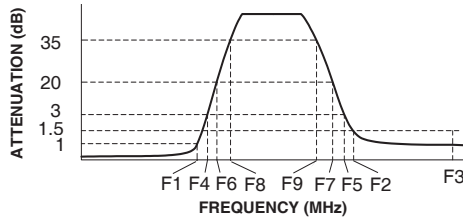


Functional Schematic

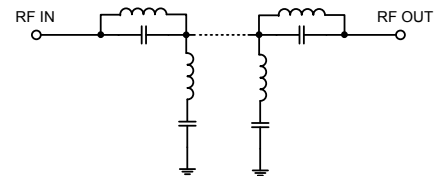

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.350	.350	.100	.175	.075	.100	.110	.040	.080
8.89	8.89	2.54	4.45	1.93	2.54	2.79	1.02	2.03
K	L	M	N	P	Q	R	wt.	
.050	.040	.195	.390	.120	.390	.070	grams	
1.27	1.02	4.95	9.91	3.05	9.91	1.78	0.25	



Demo Board MCL P/N: TB-332
Suggested PCB Layout (PL-176)

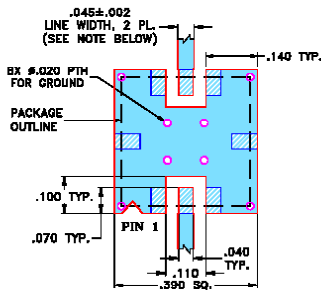

- NOTES:**
1. TRACE WIDTH IS SHOWN FOR FB4 WITH DIELECTRIC THICKNESS .025" ± .002", COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
0.1	0.03	1.01
180.0	0.46	1.06
210.0	1.01	1.15
230.0	2.72	1.24
234.0	4.24	1.79
240.0	9.26	3.65
245.0	15.83	5.91
255.0	33.69	9.53
262.0	48.54	11.24
295.0	45.34	12.71
310.0	33.43	9.58
317.0	23.58	7.05
325.0	12.12	3.42
331.0	6.09	1.55
345.0	2.87	1.86
360.0	1.68	1.41
400.0	0.80	1.34
800.0	0.45	1.54
1000.0	0.51	1.55

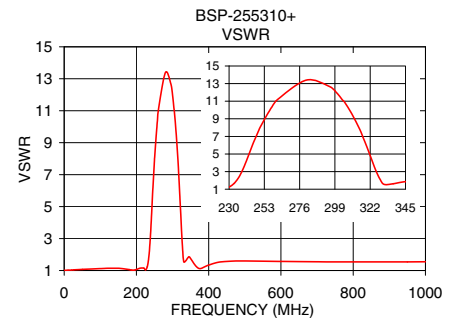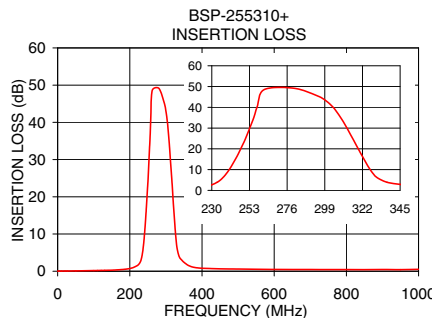

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

