

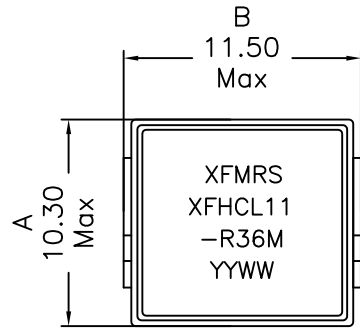



## 1. Mechanical Dimensions:

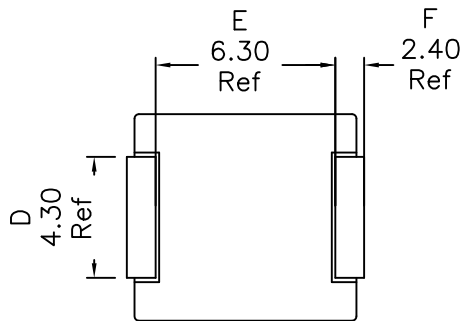

(TOP VIEW)




(BOTTOM VIEW)



(Land Patterns)

## 2. Schematic:



## 3. Electrical Specifications: @25°C

OCL: 0.36uH±20% @100KHz, 0.25V

DCR: 1.20 mOhms Max

Isat: 50.0A (Based on 20% drop in OCL)

Irms: 32.0A (Based on 40°C Temp Rise)

### Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component
11. Outsourced item processed & controlled under XFMRS QA system

DOC. REV: A/3

<b>XFMRS Inc</b> www.XFMRS.com		Title: <b>XFHCL11 SERIES INDUCTORS</b>	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XFHCL11-R36M	REV. A	
	DWN.	Yuan	Jan-09-13
	CHK.	YK Liao	Jan-09-13
SHEET 1 OF 1	APP.	BSJ	Jan-09-13

**PROPRIETARY**

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.