




BAT54WS

SCHOTTKY DIODE

SOD-323

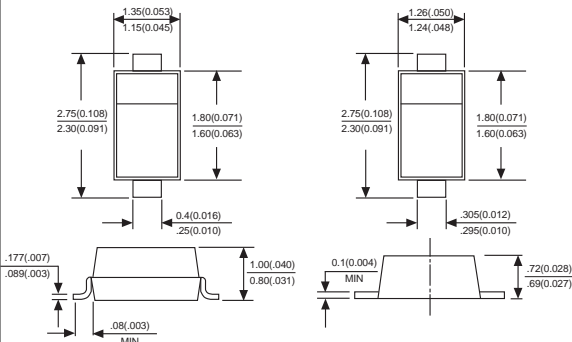

Dimensions in millimeters and (inches)

FEATURES

- ◆ Low forward voltage drop
- ◆ Fast switching time
- ◆ Surface mount package ideally suited for automatic insertion

MECHANICAL DATA

Case: Molded plastic body
Terminals: Plated leads solderable per MIL-STD-750, Method 2026
Polarity: Polarity symbols marked on case
Marking: L9

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS






Maximum ratings and electrical characteristics, Single diode @T_A=25°C

PARAMETER	SYMBOLS	LIMITS	UNITS
DC Blocking voltage	V _R	21	V
Average rectified output current	I _o	100	mA
Forward continuous current	I _{FM}	200	mA
Repetitive peak forward current	I _{FRM}	300	mA
Forward surge current	I _{FSM}	600	mA
Power dissipation	P _d	200	mW
Thermal resistance, junction to ambient air	R _{θJA}	625	K/W
Junction temperature	T _j	125	°C
Storage temperature	T _{STG}	-65 to +150	°C
Non-Repetitive peak reverse voltage	V _{RM}	30	V

Electrical ratings @T_A=25°C

PARAMETER	SYMBOLS	Min.	Typ.	Max.	Unit	Conditions
Reverse breakdown voltage	V _{(BR)R}	30			V	I _R =100uA
Forward voltage	V _{F1}			240	mV	I _F =0.1mA
	V _{F2}			320	mV	I _F =1.0mA
	V _{F3}			400	mV	I _F =10mA
	V _{F4}			500	mV	I _F =30mA
	V _{F5}			1000	mV	I _F =100mA
Reverse current	I _R			2.0	uA	V _R =25V
Capacitance between terminals	C _T			10	pF	V _R =0, f=1.0MHz
Reverse recovery time	t _{rr}			5.0	ns	I _F =10mA, I _R =10mA to 1mA R _L =100Ω

RATINGS AND CHARACTERISTIC CURVES BAT54WS

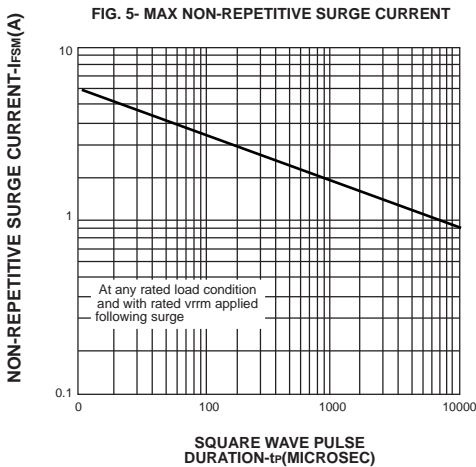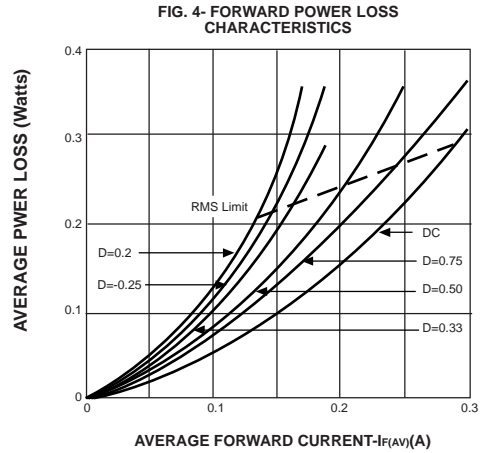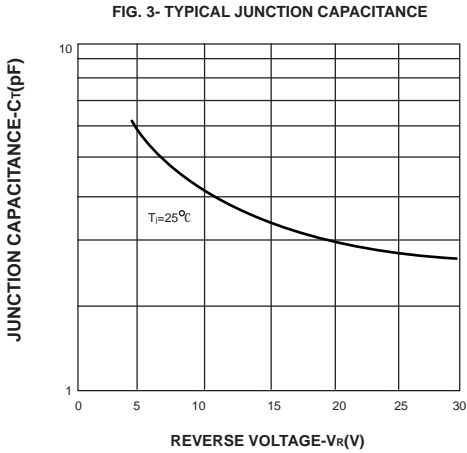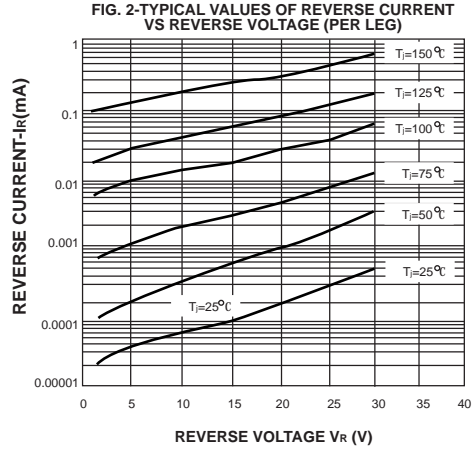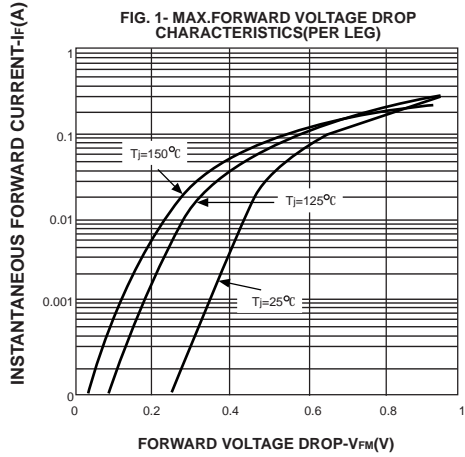


RATINGS AND CHARACTERISTIC CURVES BAT54WS

PACKAGE OUTLINE


Plastic surface mounted package

SOD-323

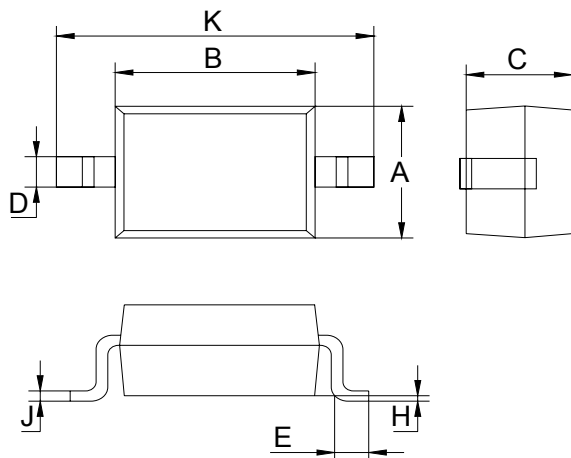

SOD-323		
Dim	Min	Max
A	1.275	1.325
B	1.675	1.725
C	0.9 Typical	
D	0.25	0.35
E	0.27	0.37
H	0.02	0.1
J	0.1 Typical	
K	2.6	2.7
All Dimensions in mm		

SOLDERING FOOTPRINT

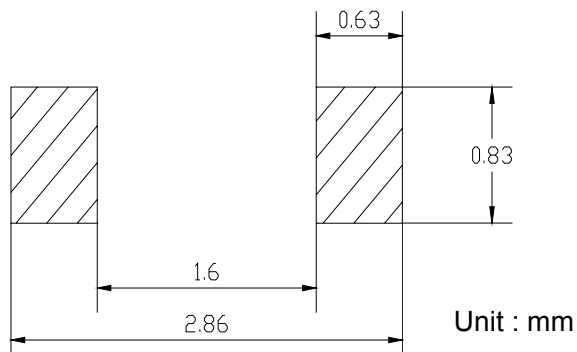

PACKAGE INFORMATION

Device	Package	Shipping
BZT52C2V0S-BZT52C39S	SOD-323	3000/Tape&Reel