





1. Mechanical Dimensions:

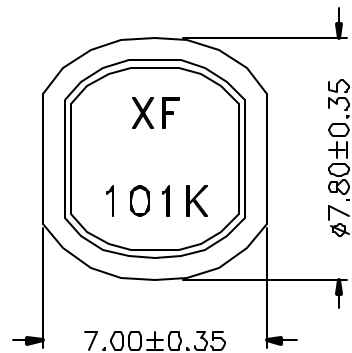

2. Schematic:



3. Electrical Specifications:

OCL: 100 μ H $\pm 10\%$ @1.0KHz 1.0V

DCR: 0.490 Ohms Max.

IDC: 0.55 A Max.

SRF: 8MHz Typ

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Temperature rating 155°C UL file E151556
5. Operating Temperature Range: -40°C to +85°C

DOC. REV A/1

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION

XFMRS Inc		Title: XFSDR74SH SERIES INDUCTORS	
UNLESS OTHERWISE SPECIFIED TOLERANCES: N/A Dimensions in MM	P/N: XFSDR74SH-101K		REV. A
	DWN.	廖玉坤	Apr-05-01
	CHK.	李清IL	Apr-05-01
	APP.	BW	Apr-05-01

SHT 1 OF 1