

## FAST RECOVERY RECTIFIERS

VOLTAGE RANGE: 50 --- 1000 V  
CURRENT: 1.0 A

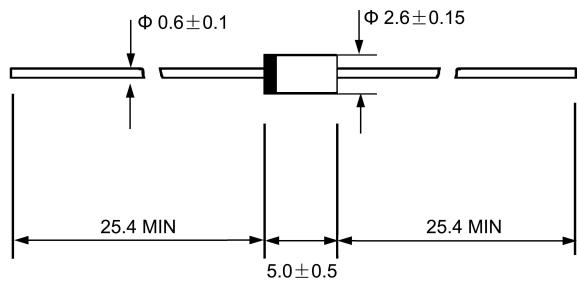
### FEATURES

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

### MECHANICAL DATA

- ◇ Case: JEDEC A-405, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.008ounces, 0.23 grams
- ◇ Mounting position: Any

A - 405



Dimensions in millimeters

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

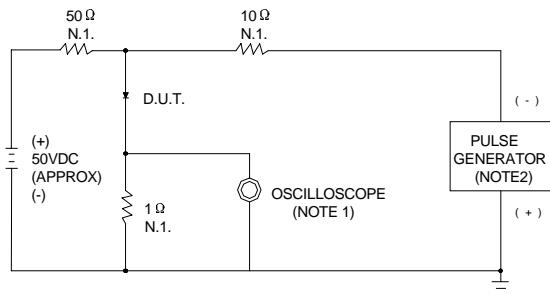
Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		SFR 101L	SFR 102L	SFR 103L	SFR 104L	SFR 105L	SFR 106L	SFR 107L	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ\text{C}$	$I_{F(AV)}$				1.0				A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ\text{C}$	$I_{FSM}$				30.0				A
Maximum instantaneous forward voltage @ 1.0 A	$V_F$				1.2				V
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=100^\circ\text{C}$	$I_R$				5.0				$\mu\text{A}$
Maximum reverse recovery time (Note1)	$t_{rr}$		120		200		350		ns
Typical junction capacitance (Note2)	$C_J$			12					pF
Typical thermal resistance (Note3)	$R_{\theta JA}$			55					$^\circ\text{C}/\text{W}$
Operating junction temperature range	$T_J$		- 55---- + 150						$^\circ\text{C}$
Storage temperature range	$T_{STG}$		- 55---- + 150						$^\circ\text{C}$

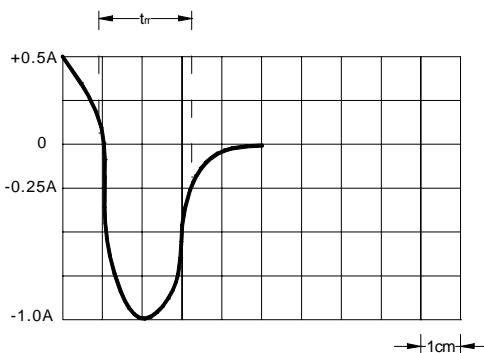
NOTE:1. Measured with  $I_F=0.5\text{A}$ ,  $I_R=1\text{A}$ ,  $I_{rr}=0.25\text{A}$ .

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

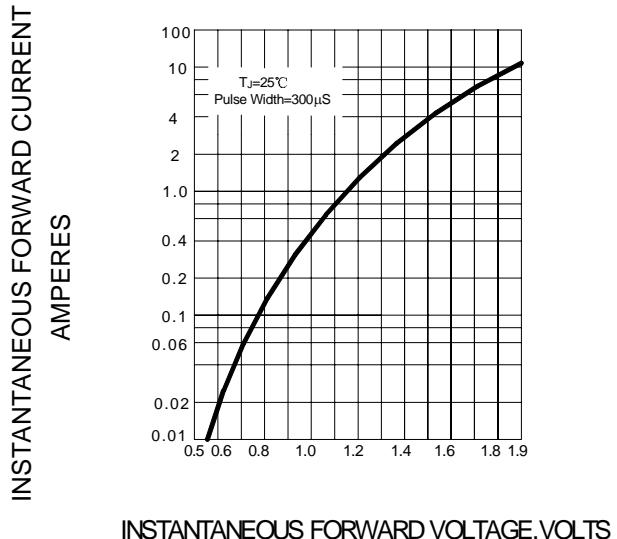
3. Thermal resistance from junction to ambient.

FIG.1 – REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

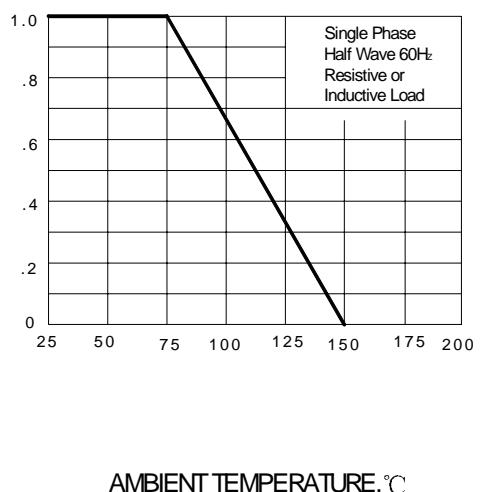
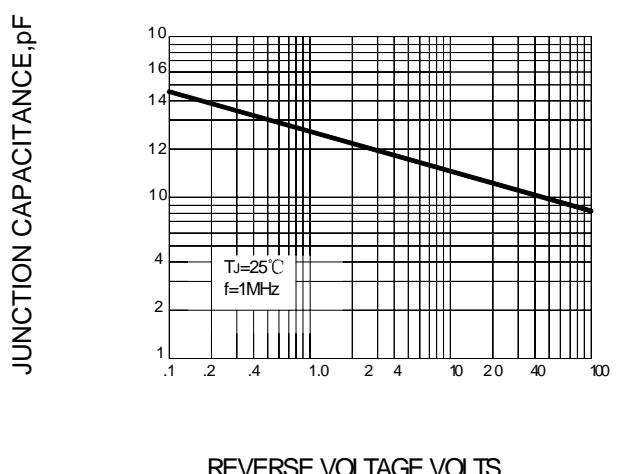
NOTES:  
1. RISE TIME=7ns MAX. INPUT IMPEDANCE=1M $\Omega$ , 22pF  
2. RISE TIME=10ns MAX. SOURCE IMPEDANCE=50 $\Omega$



SET TIME BASE FOR 50/100 ns /cm

FIG.2 –TYPICAL FORWARD CHARACTERISTIC

INSTANTANEOUS FORWARD CURRENT AMPERES

FIG.3 – FORWARD DERATING CURVEFIG.4–TYPICAL JUNCTION CAPACITANCE

PEAK FORWARD SURGE CURRENT AMPERES

FIG.5–PEAK FORWARD SURGE CURRENT